Exterior Accessories Pages 3 - 20

Fiberglass Steps, Wood Steps, Premium Skirting, Eagle Skirting, Nailite, K-Rock, Rapid Wall, Vinyl Siding and Accessories, Patio Covers and Carprorts, Vinyl Shutters

Transportation & Set up Pages 21 - 30

Transport Lights, Close Off Film & Tape, Shock Cords, Transport Signs & Flags, Anchors, Digital Levelers, Wood Wedges & Shims, Lag Screws, XI-2, Pipe Hanger, Transportation & Towing Supplies

Air Conditioners and Heat Pumps Pages 31 - 51

Package A/C Units, Split System A/C Units, A-Coils, Line Sets, A/C Accessories, T-Stats, Revolv, A/C's, Package Heat Pumps, Split System Heat Pumps, Mini-Split Systems, Window A/C Units, P-Tacs

Gas and Electric Furnaces Pages 52 - 67

EB Series Electric Furnace, DGAA Gas Furnace, DFAA/DFAH Oil Furnace, MG9S 95% Furnace, Furnace Flue Assy, Heating Accessories, Nordyne M1Series & M7 Series Gas, Nordyne E3 Series Electric

Electrical & Appliances Pages 68 - 77

Lighting Fixtures, Electrical Switches, Range Hood, Ceiling Vent Fans, Sidewall Vent Fans, Ventline Motors & Accessories, Dishwashers, Ranges, Gas/Electric Stoves, Refrigerators, Washer/Dryer, Weather Radios

Doors & Windows Pages 78-94

Outswing Doors, Housetype Doors, 6-Panel Steel Doors, Dynasty Designer Series Doors, Patio Doors, French Doors, Aluminum Windows, Self Storing Storms, Vinyl Windows, Interior Doors, Wood Trim

Plumbing Pages 95 - 126

PVC Fittings, Pex Fittings & Tubing, Tubs, Garden Tubs, Specialty Tubs, Tub Surrounds, Toilets, Water Heaters, Flair-it, Heat Tape, K-Flex, Thermaline, Brass Fittings, Qest Fittings, Vent Caps, Speed fit, Vanities, Elements, Faucets, Sinks.

Roofing Materials & Sealants Pages 127 - 131

Aluminum Roof Coatings, White Elastomeric Roof Coatings, Thermoplastic Roof Coatings, Peel N Seal, Caulks, Skylights, Spray Foam Insulation, Flex Mend, Roof Coat Brushes & Handles, Carpet Shield, Squeak Enders, Sag Enders, Center Seal

Tools & Fasteners Pages 132 - 123

Anchor Machines, Speed Wrench, Spray Foam Guns, Crimp Tools, Oetiker Tools, Screws, Magnetic Bits, Power Bits, Nut Drivers, 5 in 1 Drivers, Lag Screws, Rosettes

Revised 090310



Terms and Conditions of Sale

Payment Options/Terms of Sale

General Supply offers several payment options.

- We Accept Major credit cards: Master Card * Visa * Discover* Am. Express
- C.O.D. Company or Certified Check, Money Order
- Open Account Approved Line of Credit A complete credit application listing trade references, bank relationship, and guarantees may be required to establish a line of credit.

Freight Order Minimums

Delivery charges and freight minimums may apply depending on customer location and purchased quantities. Minimum fuel charges may vary depending on economic conditions. Delivery charges will be provided when order is placed

Sales Tax

An executed sales tax exemption certificate must be on file to avoid sales tax charged to any order. Sales tax is automatically added to any order without a valid sales tax exemption certificate on file

Damage Items/Shortages

All items are carefully packed prior to shipment. If merchandise is damaged by the delivery carrier, you must make note of it on the delivery receipt. Be sure to count the number of all items on your delivery and compare it to your invoice. Be sure to report any discrepancies or damage claims to the driver at time of delivery.

Returns

Unless shipped in error, General Supply will not accept any returns without prior written authorization. Request for returns must be made within 30 days of delivery, must be in our current offering, and in its original condition. Special order items can not be returned for credit unless damaged by delivery carrier. All accepted returns are subject to a 15% re-stocking fee.

Pricing

Please check with your General Supply Sales rep for pricing inquiries. General Supply makes every attempt to hold prices down. However as the market demands, prices are subject to change with out notice.

Order Procedure

- Orders can be placed by phone to our sales team at 317.856.4300 or toll free at 800.479.2754
- > You can fax your order in at 317.856.1012
- Orders can be emailed to your sales rep or sent to <u>sales@generalsupplyinc.com</u>
- Pick up orders are available from 7:30 am to 5:30 pm Monday – Friday and 9:00 am to 1:00 pm Saturday. Closed Sundays and Holidays.

Warranty Statement

General Supply Inc. makes no warranties written, implied or expressed, including implied warranties of merchantability and fitness for a particular purpose in this catalog. The only warranties applicable to these products are the warranties offered by the products Manufacturer.

General Supply Inc 317.856.4300 Toll Free 800.749.2754 Fax 317.856.1012



STYLECREST.

DURA GRIP II[™] STEPS

High Performance Safety Surface

Dura-Grip[™] fiberglass step has a textured, slip resistant stone-like surface that gives a better footing in all weather conditions. The receding riser gives the step 12" of surface for the foot and gives the unit a contemporary look

Faster Rail Mounts


Mounting rails is a snap. Just align the rail post with the pre-drilled holes(that have steel sleeves so no drilling is required), and tighten the bolt.

Style Crest[®] Standard and Deluxe Railing Systems

Install Standard railings when you need an economical choice. Choose the Deluxe extruded aluminum railing for added strength and safety. All Style Crest[®] rails meet or exceed most federal, state and local code requirements

Custom Sizes Available

Style Crest[®] can manufacture steps to unique specifications. We design and build a variety of sizes and styles. Ask your General Supply representative for details.



Economaster Step w/standard rail



The side approach step shown with Deluxe side and back rails. Note; rails are sold separately

THE ECONOMASTER

Our most popular straight approach fiberglass entry steps. Affordable, attractive, and durable.







SHOWN WITH DELUXE RAIL



Riser Height Overall Height Width Depth Part Number Landing Standard Deluxe Depth **Rail Number Rail Number** 029124 017142436 7" 14" 24" 36" 02124 8″ 16″ 36" 029124 018162436 24" 02124 017212436 02224 029224 7" 21" 24" 36" 8″ 36" 02224 029224 018242436 24" 24" 7" 28" 36" 02324 029324 017282436 24" 8″ 32" 36" 02324 029324 018322436 24" 018402436 8″ 40" 24" 36" 02424 029424 8″ 48" 24" 36" 02524 018482436

ECONOMY STEPS

As space conscious as it is cost conscious 32" wide with a 14" landing





Part Number	Riser Height	Overall Height	Landing Depth	Width	Standard Rail Number
018161432	8″	16″	14″	32″	02114M
018241432	8″	24″	14″	32″	02214M
018321432	8″	32″	14″	32″	02314M



THE PLATFORM STEP

cb

Use this full 38″x38″or the 38″x 48″ landing with reversible railing when you prefer a parallel approach.

Code approved in most areas

RAIL BUMPERS STANDARD ON ALL RAIL OPTIONS



Shown with Deluxe Rails Note: Side & Back Rails must be Ordered Separately

Part Number	Riser Height	Overall Height	Landing Depth				Standard Back Rail	Deluxe Back Rail
017143838	7″	14″	38″	38″	02138	029138	0238	02938
018163838	8″	16″	38″	38″	02138	029138	0238	02938
017213838	7″	21″	38″	38″	02238	029238	0238	02938
018243838	8″	24″	38″	38″	02238	029238	0238	02938
017283838	7″	28″	38″	38″	02338	029338	0238	02938
018323838	8″	32″	38″	38″	02338	029338	0238	02938
017353838	7″	35″	38″	38″	02538	02538 0294387 0238		02938
018403838	8″	40″	38″	38″	02438 029438 0238		0238	02938
017423838	7″	42″	38″	38″	N/A 0295387 N/A		02938	
018483838	8″	48″	38″	38″	N/A 029538 N/A		N/A	02938
017493838	7″	49″	38″	38″	N/A	0296387	N/A	02938
018163848	8″	16″	38″	48″	02138	029138	0248	02948
018243848	8″	24″	38″	48″	02238	029238	0248	02948
017283848	7″	28″	38″	48″	02338	029338	0248	02948
018323848	8″	32″	38″	48″	02338	029338	0248	02948
017353848	7″	35″	38″	48″	02538	0294387	0248	02948
018403848	8″	40″	38″	48″	02438	029438	0248	02948




THE 48" WIDE

A popular, mid-sized fiberglass step with full 29^r platform. Twin railings recommended.



ALL RAIL OPTIONS



STANDARD SIDE RAIL STANDARD BACK RAIL





DELUXE SIDE RAIL

DELUXE BACK RAIL

Part Number	Riser Height	Overall Height	Landing Depth	Width Depth	Standard Rail Number	Deluxe Rail Number	Standard Back Rail	Deluxe Back Rail
017142948	7″	14″	29″	48″	02129	029129	0248	02948
018162948	8″	16″	29″	48″	02129	029129	0248	02948
017212948	7″	21″	29″	48″	02229	029229	0248	02948
018242948	8″	24″	29″	48″	02229	029229	0248	02948
017282948	7″	28″	29″	48″	02329	029329	0248	02948
018322948	8″	32″	29″	48″	02329	029329	0248	02948
017352948	7″	35″	29″	48″	02429	0294297	0248	02948
018402948	8″	40″	29″	48″	02429	029429	0248	02948



THE 72" WIDE

Elegant approach with full 72" wide step and 29" deep platform for use with sliding glass and french doors. Twin railings recommended.

Part Number	Riser Height	Overall Height	Landing Depth	Width	Standard Rail Number	Deluxe Rail Number
017142972	7″	14″	29″	72″	02129	029129
018162972	8″	16″	29″	72″	02129	029129
017212972	7″	21″	29″	72″	02229	029229
018242972	8″	24″	29″	72″	02229	029229
017282972	7″	28″	29″	72″	02329	029329
018322972	8″	32″	29″	72″	02329	029329
017352972	7″	35″	29″	72″	02429	0294297
018402972	8″	40″	29″	72″	02429	029429



- Deluxe Rails Offer Added Strength
- Compementary Color
- Natural Stone Appearance
- Durable 5 Mil Black Powder Coat Finish
- Attractive Design
- Engineered For Safety
- Helps Protect Children and Pets From Falls
- Easy To Install

029324E Elite Deluxe Side Rail Step 28"/32" H - Platform 24" D
0293838E Elite Deluxe Side Rail Step 28"/32" H - Platform 38"D
0294387E Elite Deluxe Side Rail Step 35" H - Platform 38" D
029438E Elite Deluxe Side Rail Step 40" H - Platform 38" D

02938E Elite Deluxe Back Rail 38" Width /38" x 38" Platform **02948E** Elite Deluxe Back Rail 48" Width /38" x 48" Platform





Vinyl Window Shutters

Molded shutters of high-impact polystyrene with realistic woodgrain texutre. Very durable finish will not crack, peel or chip. Sold boxed as a pair.

(sizes and colors are subject to change without notice. check with your GS sales rep)



9" x 24"		12" x 31"	
Black	380924B	Brown	381231BR
Green	380924GR	Black	381231B
Red	380924R	Green	381231GR
White	380924W	White	381231W
9" x 27.5"		12" x 55"	
Brown	3809275BR	Brown	381255BR
Black	3809275B	Black	381255B
White	3809275W	White	381255W
Green	3809275GR	Green	381255GR
Red	3809275R	Red	381255R
9" x 41"		12" x 63"	
Brown	380941BR	Brown	381263BR
Black	380941B	Black	381263B
White	380941W	White	381263W
Green	380941GR	Green	381263GR
9" x 53"		15' x 55"	
Brown	380953BR	Brown	381553BR
Black	380953B	Black	381553B
White	380953W	White	381553W
Green	380953GR	Green	381553GR

Economy Wood Steps

These steps are easy to install and are available in 16", 24" or 32" heights. These steps will fold up for easy storage and are offered with an optional hand rail that can be mounted to either side.

L			Platform
Part No	Description		Width
20222	2-Step no platform	16″H x 36″ W	
20223	3-Step no platform	24"H x 36" W	Height
20224	4-Step no platform	32″H x 36″ W	2
20225	5-Step no platform	40"H x 36" W	
20222R	2-Step Hand rail	Use with 20222	3
20223R	3-Step Hand rail	Use with 20223	
20224R	4-Step Hand rail	Use with 20224	
			Treads

If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You

Distform

Exterior Accessories

Kits Available

Style Crest offers Premium and Eagle installation kits to make ordering easier. Choose from combinations of panels and trim components in all five standard colors.

Skirting Accessories

Qty.	Description Pa	art No.
100	8" Spikes & 200 - 11/2" Nails	3 350
250	1 ¹ /2" Nails	3352
250	11/2" Hexwasher #8 Screws	3353
100	8" Spikes & 250 - #8 Screws	3354
200	8" Spikes	3510
250	1 ¹ /2" Self Tapping Hexhead #8 Screws	3511
32	12" Wind Stay Rods	33412
32	24" Wind Stay Rods	33424
1	Snap Lock Punch	623764
1	Cutting Jig for Skirting	33401
1	Color Selector	3321
1	Sales Sample Kit	3323

V-Guard Skirt Protector

Description	Part No.	Color		
V-Guard 50 pcs. / ctn.	332031	White		
V-Guard 50 pcs. / ctn.	332033	Grey		
V-Guard 50 pcs. / ctn.	332034	Clay		
V-Guard 50 pcs. / ctn.		Tan		
V-Guard 50 pcs. / ctn.	332038	Sand		
11'1" pcs.				



Premium Plus specifications

Description	Part No.	Color
Premium Plus Panel Carton Contents: 12 pcs. 16" x 140"	332061 332063 332064 332067 332068	White Grey Clay Tan Sand
Premium Plus Center Vent Carton Contents: 12 pcs. 16' x 140"	333331 333333 333334 333337 333338	White Grey Clay Tan Sand
Premium Plus Trim Kit Hardware not included Top Trim Back 15 pcs 165 lin. ft. Top Trim Front 15 pcs 165 lin. ft. Bottom Channel 15 pcs 165 lin. ft. Includes 4 pre-notched for corners	332211 332213 332214 332217 332218	White Grey Clay Tan Sand
Premium Plus Bulk Top Trim Front 11'1" pcs 50 pcs. / ctn.	332031 332033 332034 332037 332038	White Grey Clay Tan Sand
Premium Plus Bulk Top Trim Back 11'1" pcs 50 pcs. / ctn. 105.8 lbs. / ctn.	332021 332023 332024 332027 332028	White Grey Clay Tan Sand
Premium Plus Bulk Bottom Channel 11'1" pcs 50 pcs. / ctn.	332011 332013 332014 332017 332018	White Grey Clay Tan Sand
Premium Plus Notched Top Trim Front 11'1" pcs 50 pcs. / ctn.	332041 332043 332044 332047 332048	White Grey Clay Tan Sand

Eagle specifications

Description	Part No.	Color
Eagle Panel Carton Contents: 12 pcs. 16" x 140"	343081 343083 343084 343087 343088	White Grey Clay Tan Sand
Eagle Center Vent Carton Contents: 12 pcs. 16" x 140"	349991 349993 349994 349997 349998	White Grey Clay Tan Sand
Eagle Deluxe Trim Kit Hardware not included Top Trim Back 15 pcs 165 lin. ft. Top Trim Front 15 pcs 165 lin. ft. Includes 4 pre-notched for corners Bottom Channel 15 pcs 165 lin. ft.	343251 343253 343257 343258	White Grey Tan Sand
Eagle Deluxe Bulk Top Trim Front 11'1" pcs 50 pcs. / ctn.	343051 343053 343057 343058	White Grey Tan Sand
Eagle Deluxe Bulk Top Trim Back 50 pcs. / ctn.	343021 343023 343027 343028	White Grey Tan Sand
Eagle Deluxe Bulk Bottom Channel 11'1" pcs 50 pcs. / ctn.	343011 343013 343017 343018	White Grey Tan Sand
Eagle Deluxe Notched Top Trim Front 11'1" pcs 50 pcs. / ctn.	343091 343093 343097 343098	White Grey Tan Sand

Material Estimation based on level site

			Туріса	al Singl	e/Doub	le Wid	e Hom	e Set O	n								11			
Size in	Feet	12x50	12x60	12x70	14x60	14x65	14x70	14 x76	14x80	16x70	16x80	24x50	24x60	24x65	24x70	24x72	24x76	24x80	28x65	28x70
Linear I (less hi		116	136	156	140	150	160	172	180	164	184	140	160	170	180	184	192	200	178	188
Avg. Skirting Height	Avg. Cuts Panel		Numb	er of Pa	anels R	equire	d													
18″	8	11	13	15	13	14	15	16	17	16	18	13	15	16	17	21	22	24	17	18
24″	6	15	17	20	18	19	20	22	23	21	23	18	20	22	23	27	28	30	23	24
28″	5	18	21	24	21	23	24	26	27	25	28	21	24	26	27	32	33	35	27	29
32″	4	22	26	30	27	29	30	33	34	31	35	27	30	32	34	39	40	42	34	36
46″	3	29	34	39	35	38	40	43	45	41	46	35	40	43	45	50	52	55	45	47
Trim Pa	rt		Numb	er of Tr	im Con	nponer	its Req	uired												
Top Fro	nt 11'	11	13	15	13	14	15	16	17	15	17	13	15	16	17	18	18	19	17	18
Top Bac	:k 11'	11	13	15	13	14	15	16	17	15	17	13	15	16	17	18	18	19	17	18
Btm Cha	anl 11'	11	13	15	13	14	15	16	17	15	17	13	15	16	17	18	18	19	17	18
Ground	Spikes	75	90	98	90	94	100	114	120	100	122	90	100	112	120	130	137	149	118	125
Nails		140	165	189	170	181	194	208	218	200	223	170	195	206	218	238	250	265	216	227

STYLECREST.


Description	Part Num	ber / Color
PREMIUM PLUS PANEL	332061	White
Carton Contents	332063	Gray
12 pcs. 16" by 140" Long	332064	Clay
66.4 Lbs/carton	332067	Tan
	332068	Sand
PREMIUM PLUS	333331	White
CENTER VENT	333333	Gray
Carton Contents	333334	Clay
12 Pcs. 16" by 140" Long	333337	Tan
66.4 Lbs/carton	333338	Sand
PREMIUM PLUS TRIM KIT		
Hardware Not Included	332211	White
Top Trim Back 15 pcs165 lin. ft.	332213	Gray
Top Trim Front 15 pcs165 lin. ft.	332214	Clay
Bottom Channel 15 pcs165 lin. ft.	332217	Tan
Includes 4 pre-notched for corners	332218	Sand
91.5 Lbs/carton		
PREMIUM PLUS	332031	White
BULK TOP TRIM FRONT	332033	Gray
11' 1" pcs.—50 pcs./ctn.	332034	Clay
112.1 Lbs/carton	332037	Tan
	332038	Sand
PREMIUM PLUS	332021	White
BULK TOP TRIM BACK	332023	Gray
11' 1" pcs50 pcs./ctn.	332024	Clay
105.8 Lbs/carton	332027	Tan
New Statement of Security According 1994 (Security Security Securi	332028	Sand
PREMIUM PLUS	332011	White
BULK BOTTOM CHANNEL	332013	Gray
11' 1" pcs50 pcs./ctn.	332014	Clay
86.5 Lbs/carton	332017	Tan
	332018	Sand
PREMIUM PLUS	332041	White
NOTCHED TOP TRIM FRONT	332043	Gray
11' 1" pcs.—50 pcs./ctn.	332044	Clay
11' 1" pcs.—50 pcs./ctn.	332047	Tan
112.1 Lbs/carton	332048	Sand



Center Vent

Panel

Premium Center Vent Panel Offers 8.4 in.² Vent Per Lineal ft. of Vented Panel at **NO Additional Charge!**

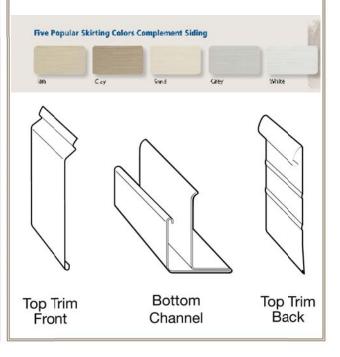


Exterior Accessories

Eagle Vinyl Skirting Panels are designed for easy access. Panels easily slip out and may be re-installed by sliding or snapping the panels together.

	COLOR STRAND	8 1991 A. 1994
Description	1	ber / Color
EAGLE PANEL	343081	White
Carton Contents	343083	Gray
12 pcs. 16" by 140" Long	343088	Sand
186.5 sq. ft./ctn.	343087 343084	Tan Clay
EAGLE CENTER VENT	349991	White
Carton Contents	349993	Gray
12 pcs. 16" by 140" Long	349998	Sand
155.6 sq. ft./ctn.	349997	Tan
	349994	Clay
PREMIUM PLUS TRIM KIT		
Hardware Not Included	332211	White
Top Trim Back 15 pcs165 lin. ft.	332213	Gray
Top Trim Front 15 pcs165 lin. ft.	332214	Clay
Bottom Channel 15 pcs165 lin. ft.	332217	Tan
Includes 4 pre-notched for corners	332218	Sand
91.5 Lbs/carton		e al ra
PREMIUM PLUS	332031	White
BULK TOP TRIM FRONT	332033	Gray
11' 1" pcs.—50 pcs./ctn.	332034	Clay
112.1 Lbs/carton	332037	Tan
	332038	Sand
PREMIUM PLUS	332021	White
BULK TOP TRIM BACK	332023	Gray
11' 1" pcs. – 50 pcs./ctn.	332024	Clay
105.8 Lbs/carton	332027	Tan
	332028	Sand
PREMIUM PLUS	332011	White
BULK BOTTOM CHANNEL	332013	Gray
11' 1" pcs.—50 pcs./ctn.	332014	Clay
86.5 Lbs/carton	332017	Tan
	332018	Sand
PREMIUM PLUS	332041	White
NOTCHED TOP TRIM FRONT	332043	Gray
11' 1" pcs.—50 pcs./ctn.	332044	Clay
11' 1" pcs.—50 pcs./ctn.	332047	Tan
112.1 Lbs/carton	332048	Sand







Exterior Accessories





CREATE AN ATTRACTIVE RUSTIC APPEARANCE WITH THIS SINGLE MOLDED A.B.S. MATERIAL. K-ROCK SKIRTING WON'T SCRATCH, DENT, OR RATTLE.

K-ROK PANELS



PANEL

2923259	32" x 5' Panel; Granite
2923255	32" x 5' Panel; Sandstone
2923257	32" x 5' Panel; Brown
2923659	36" x 5' Panel; Granite
2923655	36" x 5' Panel; Sandstone
2923657	36" x 5' Panel; Brown
2924859	48" x 5' Panel; Granite
2924855	48" x 5' Panel; Sandstone
2924857	48" x 5' Panel; Brown





FOUNDATION VENT INSERT



29901 BLACK 29905 SANDSTONE

SCR	EW
2995 29255	BLACK 1" PHILIPS HEAD 350/PKG. SANDSTONE 1" PHILLIPS HEAD 350/PKG.

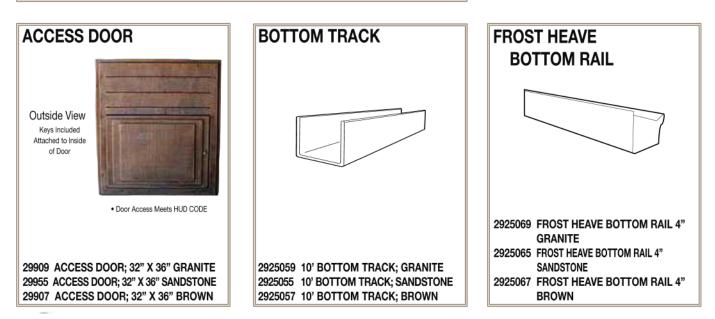

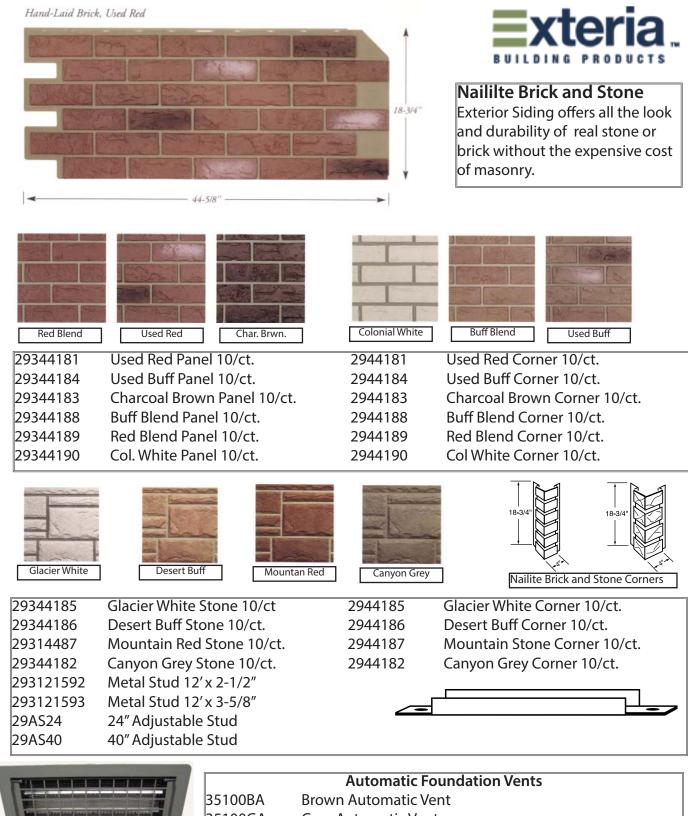

35100GA Grey Automatic Vent 35100WA White Automatic Vent

Exterior Accessories






Rapid Wall Perimeter Skirting System by Rustique provides an excellent alternative to traditional skirting systems. Available in White, Grey or Tan, this siding has the look of a true concrete foundation for your manufactured homes or modular homes. These insulated panels provide an insulation factor of R8. They are shipped in 4' x 12' sections, so there are fewer visible seams. Foundation vents are available and are easy to install. No bracing is required, saving time and money. Call or e-mail us today with the size of your home and we will provide you with a free cost estimate.



35100	Rapid Wall Panel White	144″L x 48″W
	-	
35101	Rapid Wall Panel Grey	144″L x 48″W
35102	Rapid Wall Panel Tan	144″L x 48″W
35110	Rapid Wall Trim Kit White	16 Pcs. ea. Top Front, Top Back & Bottom
35111	Rapid Wall Trim Kit Grey	16 Pcs. ea. Top Front, Top Back & Bottom
35112	Rapid Wall Trim Kit Tan	16 Pcs. ea. Top Front, Top Back & Bottom
35120	Top Front Rail White	11'8″
35121	Top Front Rail Grey	11'8″
35122	Top Front Rail Tan	11'8″
35130	Top Back Rail White	11'8″
35131	Top Back Rail Grey	11'8″
35132	Top Back Rail Tan	11'8″
35140	Bottom Rail White	11'8″
35141	Bottom Rail Grey	11'8″
35142	Bottom Rail Tan	11'8″

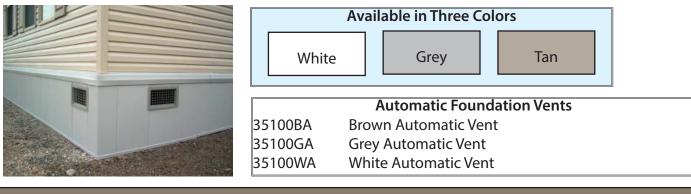



Premium Vinyl Siding


Premium Vinyl Siding Accessories Delivering Long Lasting Beauty and Performance


- Lifetime limited warranty
- Secure, positive locking system
- · Resist dents, hail damage, scratches and fading
- Never needs painting
- · Impervious to wood-boring insects, fungus and mildew
- Variety of attractive colors
- Deep embossed wood grain surface



Harbour Crest DL4

Dutchlap 4" Length 12' 6" 24 Panels/Carton 2 Sq./Carton Carton Weight: 78 lbs. Frost White 01 Classic Sand 11 Sandalwood 17 Adobe Clay 30 Harbor Stone 44

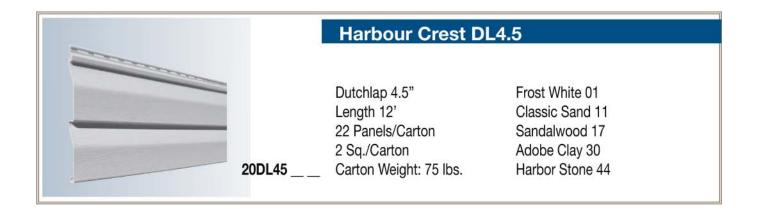

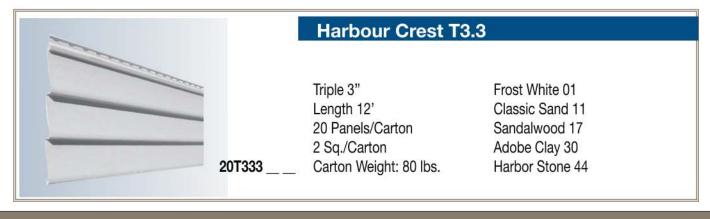


Exterior Accessories

	Inside Corner		
39AC325	3" Inside Corner Length 10' 10 Pcs./Carton 100 Linear Ft. Carton Weight: 24 lbs.	Frost White 01 Classic Sand 11 Sandalwood 17	Adobe Clay 30 Harbor Stone 44
	Outside Corner Po	at	
39AC300	3" Outside Corner Post Length 10' 10 Pcs./Carton 100 Linear Ft. Carton Weight: 33 lbs.	Frost White 01 Classic Sand 11 Sandalwood 17	Adobe Clay 30 Harbor Stone 44
	5/8" J Channel		
39J58	5/8" J Channel / Matte Finish Length 12' 6" 40 Pcs./Carton 500 Linear Ft. Carton Weight: 47 lbs.	Frost White 01 Classic Sand 11 Sandalwood 17	Adobe Clay 30 Harbor Stone 44
	Starter Strip / Alum	inum	
39STR	Starter Strip / Alum 1-1/4" Starter Strip / Aluminur Length 10' 50 Pcs./Carton Carton Weight: 30 lbs.		
39STR	1-1/4" Starter Strip / Aluminur Length 10' 50 Pcs./Carton		
39STR	1-1/4" Starter Strip / Aluminur Length 10' 50 Pcs./Carton	n	
39STR	1-1/4" Starter Strip / Aluminur Length 10' 50 Pcs./Carton Carton Weight: 30 lbs.	n	
	1-1/4" Starter Strip / Aluminur Length 10' 50 Pcs./Carton Carton Weight: 30 lbs. Door / Window Molding Length 8' 24 Pcs./Carton Carton Weight: 32 lbs.	n	
	1-1/4" Starter Strip / Aluminur Length 10' 50 Pcs./Carton Carton Weight: 30 lbs. Door / Window Molding Length 8' 24 Pcs./Carton	n	Adobe Clay 30

UniversalTM Soffit

Universal Soffit is made of impact resistant vinyl with a positive locking system for years of satisfaction

- Low luster matte finish
- Full ventilation configuration
- Positive locking system

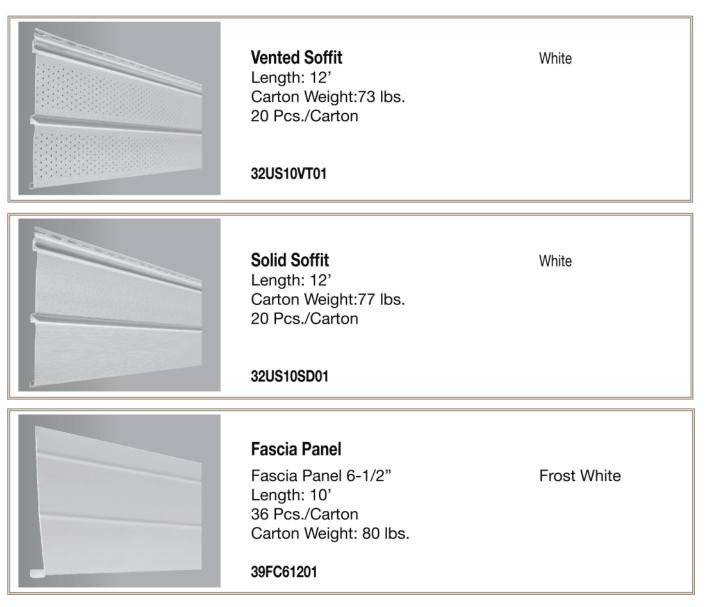

Aluminum Patio Covers and Carports

- Maintenance Free Aluminum Construction
- Baked On Enamel Finish Won't Rust or Fade. Never Needs Painting
- Custom Built To Any Size
- Easy To Assemble
- Several Styles To Choose From





Deluxe Patio Covers

Deluxe patio covers are built with a 5-1/2" Extruded Aluminum framework front and side facia. .027 gauge aluminum "V" pans and an Extruded Aluminum wallmount/hangtab system. The extruded front and side facia accept two color inserts. These color inserts are available in 13 different colors. Deluxe covers are most effective in lengths of 20' or more and projections of 10' or more. Optional .032 pans are availabe for projections of 13' or more. Call your General Supply rep for a free price quote.



Classic Patio Covers

Classic patio covers are constructed with a 4-1/2" extruded aluminum front and side facia, .027 "V" pans and an extruded aluminum two-piece wallmount hangtab. The extruded aluminum front and side facia accepts two color trim inserts. Classic patio covers are most often used when projections are 12' or less and widths are 20' or less. The Classic cover has all the attributes of the Deluxe patio cover for a little less money. **Our Most Popular Cover**



Standard Patio Covers

Standard patio covers are built with a 4-1/2" extruded aluminum front and side facia, .019 gauge "V" pans, and two piece wallmount-hangtab system. The extruded framework accepts two color trim inserts available in 13 different colors. Standard patio covers work best where projections are less than 10' and lengths are less than 20'. All patio covers from Rustique Enteprises are custom built to the highest standards

Maintenance Free Aluminum Screen Rooms

Easily Attach to All Types of RV's



The Perfect add-on for Park Models

A Great Addition to any Home





Springview Screen Rooms from Rustique Enterprises are manufactured of maintenance free aluminum with a baked on enamel finish. Each room is custom built to your specifications. Each screen panel is then pre-assembled making installation a snap. Wall heights up to 8' tall are standard and 1 door comes with every room. In addition a complete diagram with your room specifications will be supplied with your order. Screen room covers are sold separately. For more information or a free price quote, contact your General Supply Rep today!

Aluminum Porch and Deck Railing

Make any porch or deck more attractive with aluminum railing from General Supply. Each rail comes pre-assembled for easy installation. Because it is made of extruded aluminum, it will never rust or fade. Choose from 30" and 36" heights. Color choices include White, Black, Tan or Clay. For additional specifications and accessory items contact your General Supply rep for details







Transportation/Set-Up Materials Shock Cords Vapor Barrier 6051522 10"'Length Rubber Moulded 60810100 10' x 100' Roll Vapor Barrier 18" Length Rubber Moulded 6051622 **Nylon Tricott Flags and Clip** 6" Amber Seal Beam Light 18" x 18" Red 6052282 Staff Holder 6051420 60612 6" Revolving Magnetic Light 35W/12V Plastic Flag Clips (25 per bag) 6051320 **Flag on Staff** 8-1/2" Amber Seal Beam Light 18" Flag on 1/2" Staff 6052602 605812 8-1/2" Revolving Light 12V

6052612 18" x 18" Flag on 3/4" Staff

Signs - Black On Yellow




6050172	16 ft. Wide Load 8' x 18" Polycoated
6050132	14 Feet Wide 7' x 18" Polycoated
605002	Over Size Load 8' x 18" Polycoated
6050421	Over Size Load 6' x 15" Metal
6053244	WideLoad" Multi-Size Changeable

Close-Off Poly Film



6081430	14' x 300' White Opaque
6081630	16' x 300' White Opaque (spec. order)
6081415	14'x 150'White Opaque

Transportation/Set-Up Materials

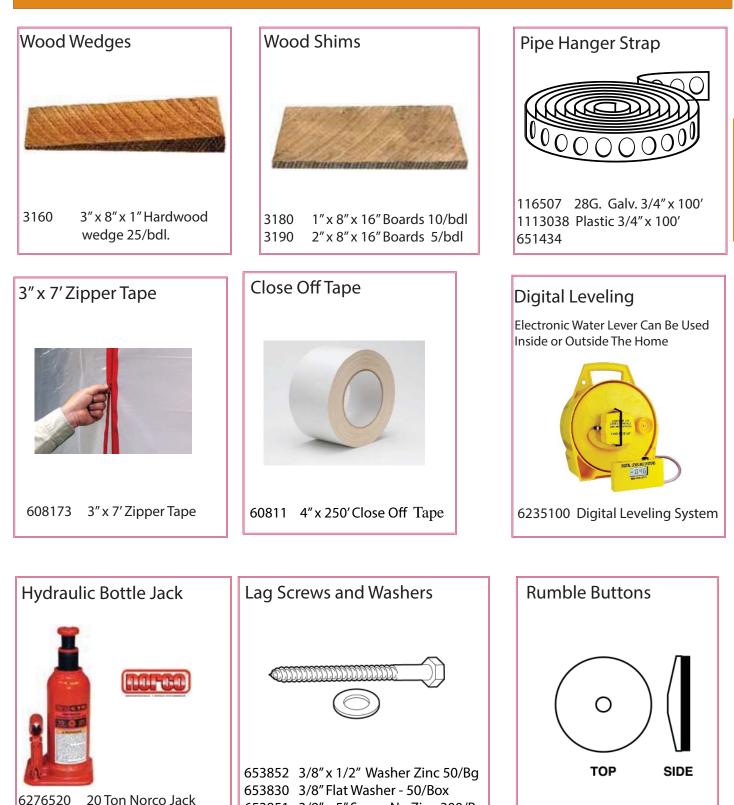

6001001 Rumble Button 100/Ctn.

General Supply Inc. 317.856.4300 Toll Free 800.479.2754 www.generalsupplyinc.com

653851 3/8" x 5" Screw No Zinc 300/Bx

6538450 3/8' x 4"Screw Zinc - 50 Bx

6538550 3/8" x 5" Screw Zinc 50 Box

6538650 3/8" x 6" Screw Zinc 50/Bx

6276412

6276512

626125


626205

12 Ton Standard Jack


12 Ton Shorty Jack

12 Ton Repair Kit

20 Ton Repair Kit

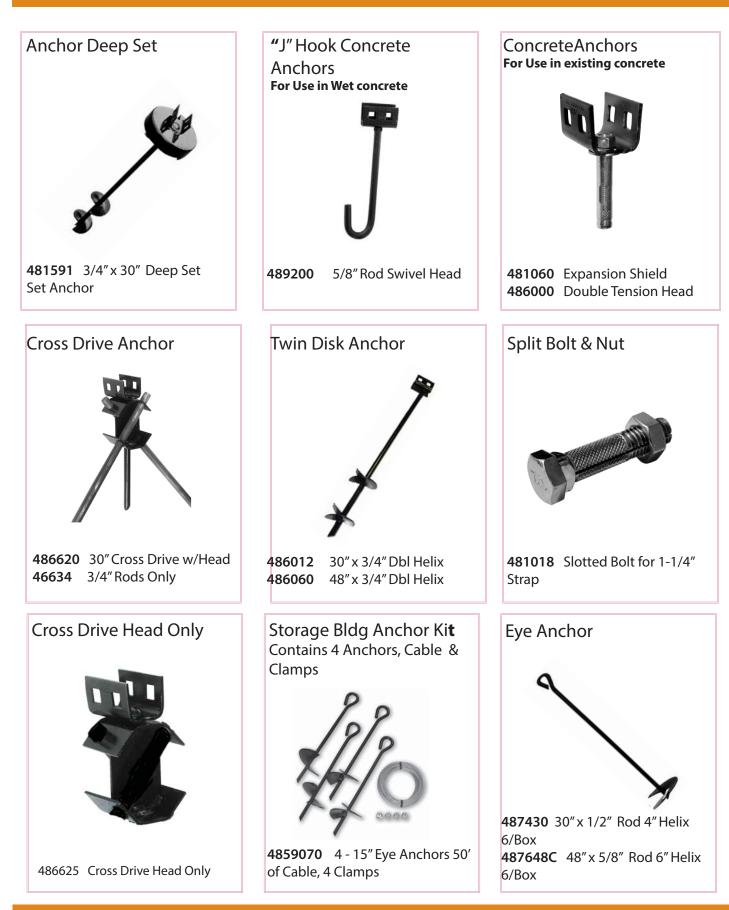



If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You

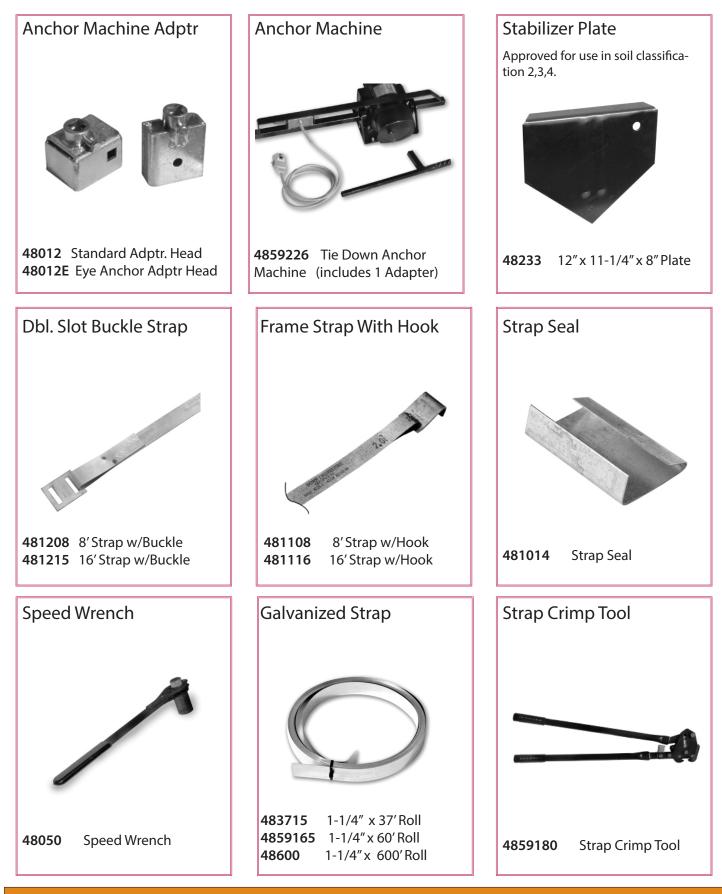

General Supply Inc. 317.856.4300 Toll Free 800.479.2754 www.generalsupplyinc.com

Transportation/Set Up Materials

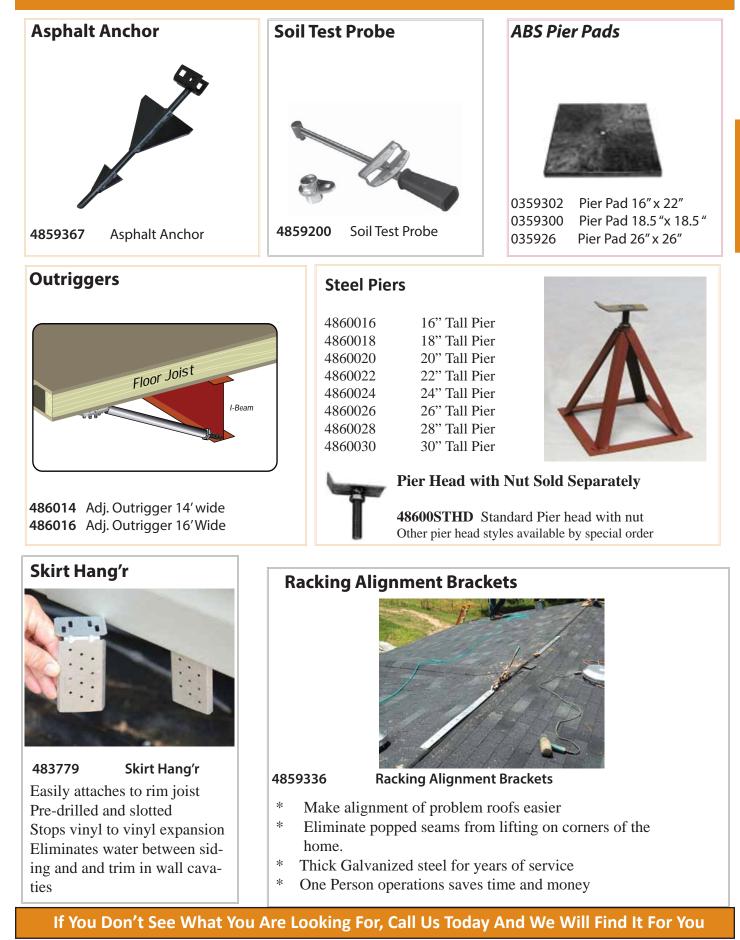

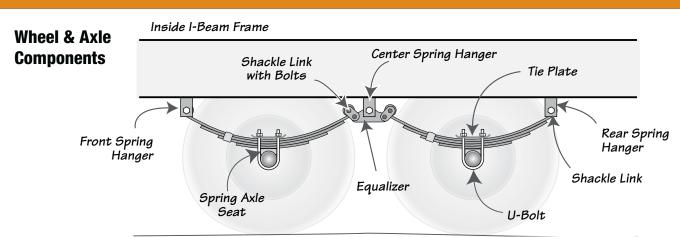

Part No.	Product	Description
4813072	Double Eye Four Leaf Spring	25-1/4"Lx 1-3/4"W 3,000# Capacity
4844055	Double Eye Cast Equalizers	EQ-310
4844415	Spring Hanger	3.344″ High x 2.0 Wide
4844530	Zinc Shackle Link	1.5″ W x 3.56 (hole to hole) x 5.188″ L
4844536	Zinc Shackle Link	1.25″W x 2.125″(hole to hole) x 3.75″ L
4810830	Shackle Bolt	9/19" x 3" Grade 5 Zinc Fluted
4810825	Shackle Bolt	1/2" x 3-1/4" Grade 5 Plain
48BBN563SZ	Shackle Bolt	9/16″ Zinc
4810645	Shackle Bolt	1/2" Zinc



Axle Removal Skid

Used when removing axles after completion of setting unit on site. Simply unbolt axle and lay in skid pan with hub behind bracket, move to opposite side and after removing bolts, slide axle out from under home. Turns a rough job into a safe one person operation.

Part# 59399 Ax

Axle Removal Skid

Jacking Plate


Jacking plate is used to add support to frame when adjusting trailer height with a jack to prevent bending the I-Beam







3-1/2" Wide jacking plate 5" Wide jacking plate



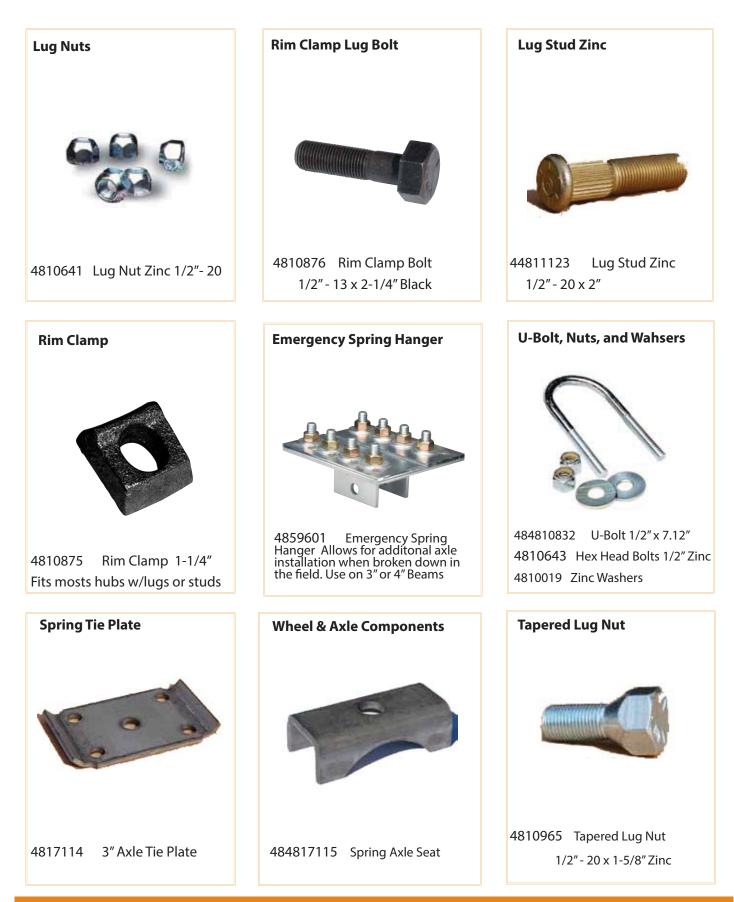



General Supply Inc. 317.856.4300 Toll Free 800.479.2754 www.generalsupplyinc.com

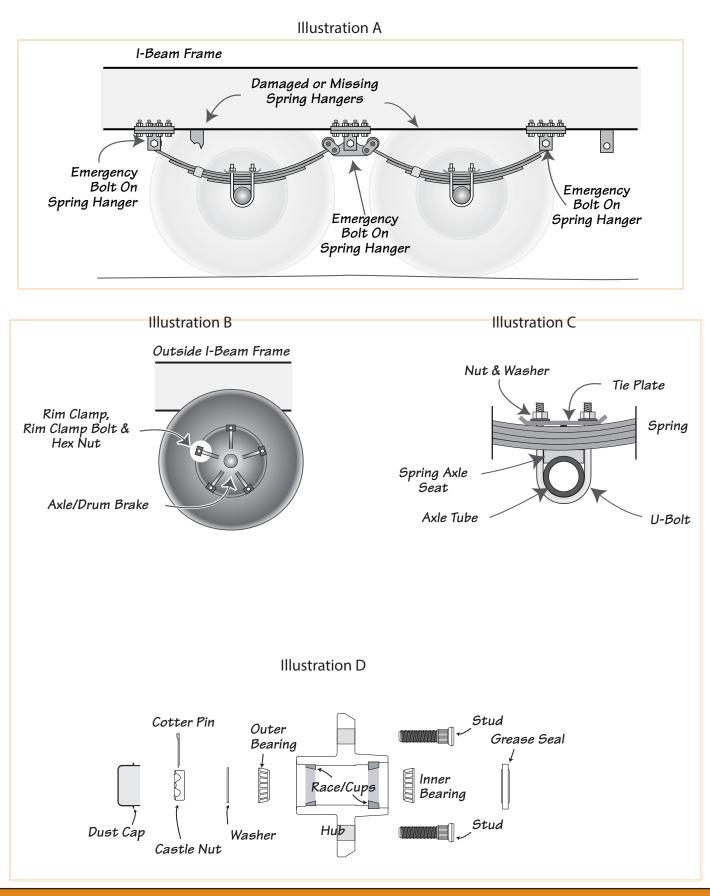

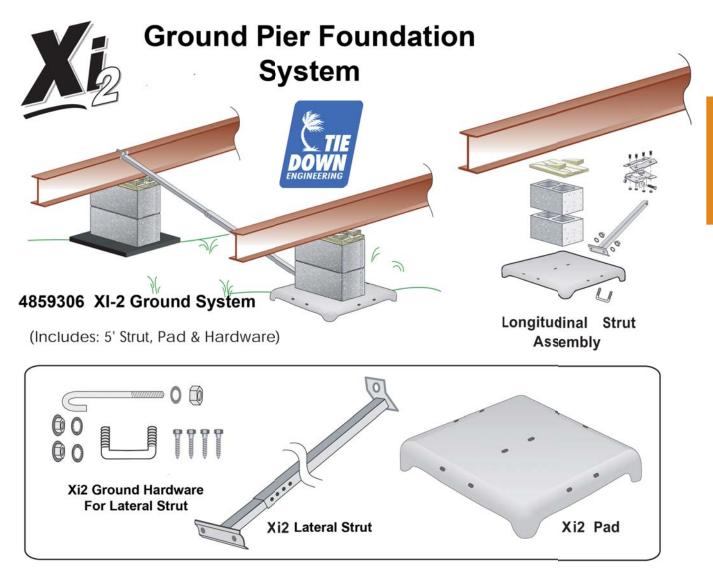


Longitudinal X i2 Parts:





Transportation/Set Up Materials

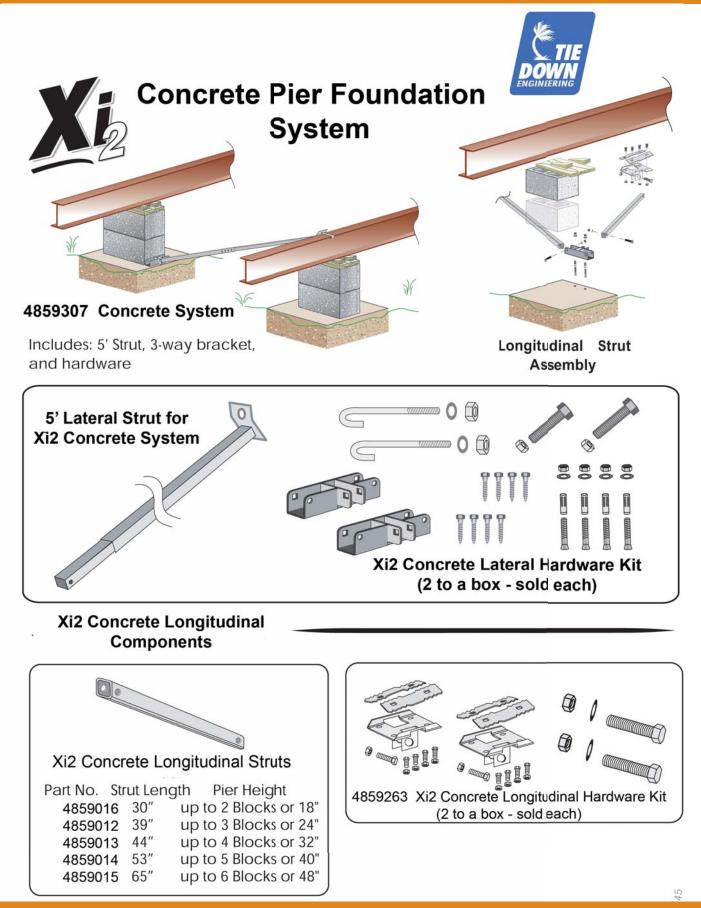








New Department of Energy Efficiency Standards for 2015

Important Changes for 2015

- *13 SEER A/C* Condensing units must be manufactured prior to 1/1/15 to be installed in the south or southwest region of the country.
- *13 SEER A/C* Condensing units can still be installed in the northern region regarless of manufacture date.
- *13 SEER Heat Pump* Condensing units and Packaged units must be manufactured prior to 1/1/15 to be installed nationwide.
- For markets located in the South and Southwest Region of the U.S. The new minimum stantard for A/C, Heat Pump and Package units will be 14 SEER if the equipment manufacture date is on or after 1/1/15.
- When installing a heat pump condesning unit or package a/c unit anywhere in the United States, the unit must have a 14 SEER rating if the unit was manufactured on or after 1/1/15.
- *Still Have Questions?* Contact your General Supply rep at 800.479.2754



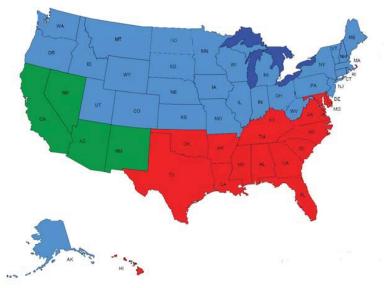


Northern Region		Southern Region		Southwest	
States		States		Region States	
Alaska	New Hampshire	Arizona	Maryland	Arizona	
Colorado	New Jersey	Arkansas	Mississippi	California	
Connecticut	New York	District Of Columbia	N. Carolina	Nevada	
Idaho	Ohio	Delaware	Oklahoma	New Mexico	
Illinois	Oregon	Florida	S. Carolina		
Indiana	Pennsylvania	Georgia	Tennessee		
Iowa	Rhode Island	Hawaii	Texas		
Kansas	South Dakota	Kentucky	Virginia		
Maine	Utah	Louisiana			
Massachusetts	Vermont				
Michigan	Washington				
Minnesota	West Virginia				

Zones	Department of Energy New Federal Minimums Effective January 1, 2015			
	Air Conditioning Heat Pump			
North	13 SEER	14 SEER - 8.2 HSPF		
South	14 SEER	14 SEER - 8.2 HSPF		
Southwest	14 SEER			
	12.2 / 11.7 EER	14 SEER - 8.2 HSPF		
	<45K / >45K			

PHE4 SERIES PACKAGED HEAT PUMPS 2.0-5.0 TON 14 S.E.E.R. 11.0 EER R410A

DESCRIPTION: These packaged cooling/heating heat pumps are designed for outdoor installation. Only utility and duct connections are required at the point of installation.





Model	Weight	Dimensions		
		Α	В	С
PHE4A2421	377	51-1/4	35-3/4	47
PHE4A3021	392	51-1/4	35-3/4	49
PHE4A3621	448	51-1/4	45-3/4	49
PHE4A4221	471	51-1/4	45-3/4	49
PHE4A4821	496	51-1/4	45-3/4	53
PHE4A6021	523	51-1/4	45-3/4	55

FEATURES

• Operating Efficiency - All PHE4 heat pump models are rated at 14.0 SEER, 11.0 EER and 8.0 HSPF for cooling and heating operation. • On Site Flexibility - All model sizes use a compact design cabinet in one of two footprints. This provides installer flexibility for placing the proper capacity unit on curbs or pads with the smallest footprint after the internal load has been determined. Field convertible duct connections from side shot to down shot allows the installer to have greater flexibility with less inventory. • Lower Installation Cost - Installation time and costs are reduced by easy power and control wiring connections. The small base dimension means less space is required on the ground or roof. All units are completely wired, charged with R-410A refrigerant and tested prior to shipment. Test stations using a state-ofthe-art computerized process system are used to insure product quality. Refrigerant charge and component part numbers are verified via computers during assembly. Vital run test statistics such as system pressure, motor currents, air velocity and temperature, unit vibration, and gas system safeties are monitored and recorded by the system to insure unit performance. Equal size side supply and return duct connections allow easy connection of ducts to match low crawl spaces without transition pieces.

• Utility Connections Made Easy - Electric utility access provided through the bottom or the side of the unit. Utility connections can be made quickly and with a minimum amount of field labor. A field supplied and field installed electrical disconnect switch must be installed.

• **Convertible Airflow Design** - The bottom duct openings are covered when they leave the factory, ready to be used for a side supply/side return application. If a bottom supply/bottom return application is desired, simply remove the two panels from the bottom of the unit and place them in the side supply/ side return duct openings. No panel cutting is required and no accessory panel is necessary. Convertible airflow design allows maximum field flexibility and minimum inventory.

• **Condensate Pan** - A corrosion-resistant, long-lasting, watertight pan is positioned below the indoor coil to collect and drain all condensate, preventing build-up of stagnant condensate. The condensate pan conforms to ASHRAE 62-89 standards (Ventilation for Acceptable Indoor Air Quality).

• **Condensate Drai**n - The 3/4 inch NPT female connection is rigidly mounted to assure proper fit and leak tight seal.

• **Durable Finish** - The cabinet is made of G90 galvanized steel with a powder paint coating for appearance and protection. The pretreated galvanized steel provides a better paint to-steel bond, which resists corrosion and rust creep. Powder paint finish insure less fading when exposed to sunlight, and provides superior corrosion resistance (1000 hour salt spray tested).

Part No.	Model No.	Description	Available Heat	Filter Size
C9HE424	PHE4A2421	2 Ton Package Heat Pump	2Kw – 13Kw	20 x 20
C9HE430	PHE4A3021	2.5 Ton Package Heat Pump	2Kw – 15Kw	20 x 20
C9HE436	PHE4A3621	3.0 Ton Package Heat Pump	2Kw – 15Kw	20 x 30
C9HE442	PHE4A4221	3.5 Ton Package Heat Pump	5Kw – 20Kw	20 x 30
C9HE448	PHE4A4821	4.0 Ton Package Heat Pump	5Kw – 20Kw	20 x 30
C9HE460	PHE4A6021	5.0 Ton Package Heat Pump	5Kw – 25Kw	20 x 30
See Accessory Page for 6HK Heat Strips for PHE and PCE Package				




HEATING & AIR CONDITIONING

General Supply Inc. 317.856.4300 Toll Free 800.479.2754 www.generalsupplyinc.com

PCE4 Series Packaged A/C Units 2.0 -5.0 Ton 14 S.E.E.R 11.0 EER R410A



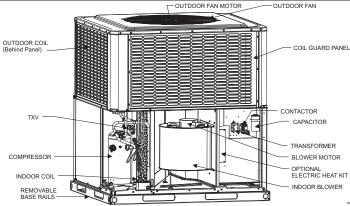

Model	Operating Weight	Dimensions				
		Α	В	С		
PCE4A2421	343	51-1/4	35-3/4	47		
PHC4A3021	389	51-1/4	35-3/4	47		
PCE4A3621	395	51-1/4	35-3/4	47		
PCE4A4221	466	51-1/4	35-3/4	49		
PCE4B4821	483	51-1/4	45-3/4	53		
PCE4B6021	500	51-1/4	45-3/4	55		

FEATURES


• **Operating Efficiency** - All PCE4 Air Conditioning models are rated at 14.0 SEER, 11.0 EER and 8.0 HSPF for cooling and heating operation.

On Site Flexibility - All model sizes use a compact design cabinet in one of two footprints. This provides installer flexibility for placing the proper capacity unit on curbs or pads with the smallest footprint after the internal load has been determined. Field convertible duct connections from side shot to down shot allows the installer to have greater flexibility with less inventory.

• Lower Installation Cost - Installation time and costs are reduced by easy power and control wiring connections. The small base dimension means less space is required on the ground or roof. All units are completely wired, charged with R-410A refrigerant and tested prior to shipment.

• Utility Connections Made Easy - Electric utility access provided through the bottom or the side of the unit. Utility connections can be made quickly and with a minimum amount of field labor. A field supplied and field installed electrical disconnect switch must be installed.

• **Convertible Airflow Design** - The bottom duct openings are covered when they leave the factory, ready to be used for a side supply/side return application. If a bottom supply/bottom return application is desired, simply remove the two panels from the bottom of the unit and place them in the side supply/ side return duct openings. No panel cutting is required and no accessory panel is necessary. Convertible airflow design allows maximum field flexibility and minimum inventory.



Part No.	Model No.	Description	Refrig Charge Lbs oz.	Available Heat	Nominal CFM	Filter Size
C9CE424	PCE4A2421	2.0 Package A/C	5lb4oz	2Kw – 13Kw	800	20 x 20
C9CE430	PCE4A3021	2.5 Package A/C	9lb – 2oz.	2Kw – 15Kw	1000	20 x 20
C9CE436	PCE4A3621	3.0 Package A/C	8lb – 3oz.	2Kw – 15Kw	1200	20 x 20
C9CE442	PCE4A4221	3.5 Package A/C	9lb – 4oz.	5Kw – 20Kw	1400	20 x 20
C9CE448	PCE4B4821	4.0 Package A/C	14lb – 4oz.	5Kw – 20Kw	1600	20 x 30
C9CE460	PCE4B6021	5.0 Package A/C	14lb – 2oz	5Kw – 25Kw	2000	20 x 30




Split System 13 S.E.E.R. R410A Air Conditioners





Unit Model	Dimensions (Inches)		Refrigerant Connection Service Valve Size		
Woder	Α	В	С	Liquid	Vapor
TC3B1821(S,H)	23-1/2	24	24	3/8	3/4
TC3B2421(S,H)	26-3/4	24	24		
TC3B3021(S,H)	30	24	24		
TC3B3621(S,H)	33-1/4	24	24		
TC3B4221(S,H)	26-3/4	29-1/4	29-1/4		7/8
TC3B4821S	30	29-1/4	29-1/4]	770
TC3B6021S	36-1/4	29-1/4	29-1/4		7/8‡



FEATURES

• Small Footprint - Minimum footprint for easier handling, transportation, and installation.

• Easier Installation- Independent panels provide quick access for unit setup. Installation time is reduced by easy power and control wiring access. Options are provided for indoor piston or TXV. The factory installed filter-drier and factory charge for a 15-Ft lineset means less time spent brazing and charging the system. The small base dimension and reduced unit clearances make for easier retrofits.

Accessible Information - QR code on unit provides quick access to technical documents and warranty information.
Durable Finish - The coated steel wire fan guard, coated

external fasteners, and pre-treated G90-equivalent galvanized

steel chassis components resist corrosion and rust

creep. Titanium colored powdercoat paint further protects external panels.

Quality Coils - The high efficiency microchannel aluminum
 coil is manufactured using an improved material system providing
 reliable performance and small unit size.

• Rugged Coil Protection - Coils are protected from mechanical damage by a proven stamped steel coil guard design.

• Protected Compressor - Compressors are protected internally

by a high pressure relief valve and a temperature sensor,

and externally by the system high pressure switch. The

liquid line filter-drier is factory installed to protect the compressor

Warranty Summary

5 Y ear Limited Parts Warranty - Can be extended to 10 Years If unit is registered on line with in 90 days of purchase

10 years on Compressor

ParrNo.	Model No.	Description	Unit Charge Lbs. – oz.	Charge per Ft. oz. **	Operating Weight
1941018	TC3B18B21S	1.5 Ton 13S Condenser	2 lb. – 15 oz.	.062	125
1941024	TC3B24B21S	2.0 Ton 13S Condenser	3 lb. – 4 oz.	.062	130
1941030	TC3B30B21S	2.5 Ton 13S Condenser	3 lb – 13 oz.	.062	140
1941036	TC3B36B21S	3.0 Ton 13S Condenser	4 lb – 1 oz.	.062	140
1941042	TC3B42B21S	3.5 Ton 13S Condenser	4 lb – 6 oz.	.067	175
1941048	TC3B48B21S	4.0 Ton 13S Condenser	4 lb - 8 oz	.067	165
1941060	TC3B60B21S	5.0 Ton 13S Condenser	5 lb – 6 oz.	.075	175
* Additional c	harge per foot whe	en use line set larger than 15' De	o not us the first 15	in your calculat	ion




Part# 6918.2011 Time Delay Required on all Manufactured Housing Electric and Oil Furnaces.



TC4B Series 14 SEER Split System Condenser 2.0 - 4.0 Ton R410-A Refrigerant

10 Year Parts/1 Year Labor*

* To receive 10 year Parts Limited warranty, online registration of unit must be complete within 60 days of installaton





to AHRI for Further Applications and Capacities



• Small Footprint - Minimum footprint for easier handling, transportation, and installation.

• Easier Installation - Independent panels provide quick access for unit setup. Installation time is reduced by easy power and control wiring access. Factory-installed TXV indoor coils are available for HSVTC matches for quicker system installation. The factory installed filter-drier and fac-tory charge for a 15-Ft lineset means less time spent brazing and charging the system. The small base dimension and reduced unit clearances make for easier retrofits.


• Accessible Information - QR code on unit provides quick access to technical documents and warranty information.

• Durable Finish - The coated steel wire fan guard, coated external fasteners, and pre-treated G90equivalent galva-nized steel chassis components resist corrosion and rust creep. Titanium colored powdercoat paint further protects external panels.

• Quality Coils - The high efficiency microchannel aluminum coil is manufactured using an improved material system pro-viding reliable performance and small unit size.

• Rugged Coil Protection - Coils are protected from mechan-ical damage by a proven stamped steel coil guard design.

• Protected Compressor - Compressors are protected inter-nally by a high pressure relief valve and a temperature sen-sor, and externally by the system high pressure switch. The liquid line filter-drier is factory installed to protect the com-pressor against moisture and debris.



Part# 6918.2011 Time Delay Required on all Manufactured Housing Electric and Oil Furnaces.


Unit Model	[Dimension (Inches)	S	Refrigerant Connection Service Valve Size	
woder	Α	В	С	Liquid	Vapor
TC4B1821H	33-1/4	24	24	3/8	3/4
TC4B2421H	30	29-1/4	29-1/4		
TC4B3021H	30	29-1/4	29-1/4		
TC4B3621H	36-1/4	29-1/4	29-1/4		
TC4B4221H	33-1/4	35-1/4	31-3/4		7/8
TC4B4821S	33-1/4	35-1/4	31-3/4		770
TC4B6021S	36-1/4	38	34-1/4		7/8 [‡]


‡ Adapter fitting must be field installed for the required 1-1/8" line set. All dimensions are in inches and are subject to change without notice.

Part No.	Description	Unit Charge	Charge	Operating	EER**
		Lb - oz	Per ft. oz	Weight	Rating
1941018	1.5 Ton 14S. Condenser	3lb – 14oz	0.62	140	11.75
1941024	2.0 Ton 14S. Condenser	3lb – 12oz.	0.62	155	11.75
1941030	2.5 Ton 14S. Condenser	4lb. – 3oz.	0.62	155	11.75
1941036	3.0 Ton 14S. Condenser	4lb – 14oz.	0.62	180	11.75
1941042	3.5 Ton 14S. Condenser	5lb – 2oz.	0.67	215	11.75
1941048	4.0 Ton 14S. Condenser	4lb. – 15oz	0.67	200	11.75
1941060	5.0 Ton 14S. Condenser	5lb – 12oz.	0.75	205	11.75

*Additional charge required per ft. Unit is charged for a 15' line set

** Based on standard matched cased or uncased coil.





QC3 & QW4 Series Split System Air Conditioners W/Quick-Connect Fittings





Coleman [®] Products are proudly built and tested right here in America's heartland. That is why we're able to cover our Coleman [®] air conditioning units for manufactured h ousing with some of the strongest warranties in the buiness.

- *Small Footprint:* for easier handling, transportation and installation
- *Efficiency Standards:* Compliant with three product families to meet regional requirements
- *Better Service Features:* Including single-panel access to the electrical controls, swing-out box for full corner access and a removalble fan guard that provides easy access for unit maintenance
- *Warranty*: Air conditioning systems come with a 1 year warranty without registration, 10 year compressor limited warranty and 5 year parts limited warranty

Model No.	Description Outside Unit	Unit Charge Lbs – Oz.	Operating Weight	Dimensions (inches) A B C	Srv. Vlv. Size Liquid / Vapor	
QC3V24B21S	2.0 Ton Q.C. Cond.	3lbs - Ooz	130	26-3/4 x 24 x 24	3/8 - 3/4	
QC3B30B21S	2.5 Ton Q.C. Cond.	3lbs - 7oz	140	30 x 24 x 24	3/8 - 3/4	
QC336B21S	3.0 Ton Q.C. Cond.	4lbs - Ooz	165	33-1/4 x 24 x 24	3/8 - 3/4	
QC3B42B21S	3.5 Ton Q.C. Cond.	3lbs - 10oz	175	26-3/4 x 29-1/4 x 29-1/4	3/8 – 7/8	
QC3B48B21S	4.0 Ton Q.C. Cond.	4lbs - 3oz	165	30 x 29-14 x 29-1/4	3/8 – 7/8	
QC3B60B21S	5.0 Ton Q.C. Cond.	5lbs - Ooz	190	36-1/4 x 29-1/4 x 29-1/4	3/8 – 7/8	
Charge per ft. o	Charge per ft. oz. in excess of 15' line set (0.62 2-3.5 ton) (0.67 4 - 5 ton)					


Hard Start kit factory installed on 2 thru 3.5 Ton units

Part No.	Model	Description	Dimension	Nominal A/C Size
13MHQH3D	MHQH35XX0631	*Coleman Q.C A-Coil	17" x 18" x 19"	2.0 – 3.0 Ton
13MHQH4D	MHQH4DXX0631	**Coleman Q.C. A-Coil	17" x 18.5" x 19"	3.5 – 4.0 Ton
13336S4AMQ	Mortex 96-8G4J-6P	Mortex Q.C. A-Coil	17" x 18" x 19"	2.0 – 3.0 Ton
13342S4AMQ	Mortex 96-8WM-6P	Mortex Q.C. A-Coil	17" x 18.5" x 19"	3.5 – 4.0 Ton

* .063 Orifice Chatleff ** .068 Orifice Chatleff

Air Conditioning



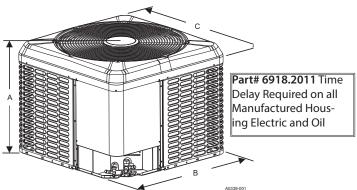

Unit Model	Dimensions (Inches)		Refrigerant Connection Service Valve Size		
woder	Α	В	С	Liquid	Vapor
TH4B1821S	33-1/4	29-1/4	29-1/4	- 3/8	
TH4B2421S	36-1/4	29-1/4	29-1/4		3/4
TH4B3021S	39-1/2	35-1/4	31-3/4		
TH4B3521S	39-1/2	35-1/4	31-3/4		
TH4B3621H	39-1/2	35-1/4	31-3/4	3/0	
TH4B4221H	39-1/2	35-1/4	31-3/4	-	7/8
TH4B4821S	39-1/2	38	31-3/4		110
TH4B6021S	42-3/4	38	34-1/4		7/8 [‡]

‡ Adapter fitting must be field installed for the required 1-1/8" line set. All dimensions are in inches and are subject to change without notice. Overall height is from bottom of base pan to top of fan guard. Overall length and width include screw heads.

TH4 SERIES 14 SEER HEAT PUMPS 2.0 - 5.0 TON R-410A



FEATURES


- Easier Installation Independent panels provide quick access for unit setup. Installation time is reduced by easy power and control wiring access. Options are provided for indoor piston or TXV. The factory installed filter-drier and factory charge for a 15-Ft lineset means less time spent brazing and charging the system. The small base dimension and reduced unit size make for easier retrofits.
- Accessible Information QR code on unit provides quick access to technical documents and warranty information.
- **Durable Finish** The coated steel wire fan guard, coated external fasteners, and pre-treated G90-equivalent galvanized steel chassis components resist corrosion and rust creep. Titanium colored powdercoat paint further protects external panels.
- **Rugged Coil Protection** Coils are protected from mechanical damage by a proven stamped steel coil guard design.
- Quality Coils Enhanced aluminum fins are mechanically bonded to copper tubing.
- Protected Compressor Compressors are protected internally by a high pressure relief valve and a temperature sensor, and externally by the system high and low pressure switches. The liquid line filter-drier is factory installed to protect the compressor against moisture and debris.
- Reliable Operation Ball bearing fan motors provide superior performance in extreme temperatures. Factory installed accumulator ensures proper functioning across a wide range of conditions.
- Environmentally Friendly CFC-free R-410A refrigerant delivers environmentally friendly performance with zero ozone depletion.
- Top Discharge Air is blown up, away from the structure and any landscaping and allows compact location on multiunit applications.
- Low Operating Sound Levels Developed using CFD and FEA tools, the sturdy cabinet and top design provides sound performance of 76 dBA or lower. Compatible accessories for further sound reduction are also available.
- Better Service Access Diagonal base valves with open access for low-loss fittings, single panel access to the electrical controls, full corner access, and removable fan guard allow easy access for unit maintenance.

Part No.	Model	Description Outdoor Unit	Operating Weight	Unit Charge (Ibs – Oz.)	Line Set Size Liquid- Vapor
1861018	TH4B1821S	1.5 Ton 14 SEER 410A	120	5lbs – 11 oz.	3/8 – 3/4
1861024	TH4B2421S	2.0 Ton 14 SEER 410A	131	6lbs – 7oz.	3/8 – 3/4
1861030	TH4B3021S	2.5 Ton 14 SEER 410A	176	7lbs – 15oz.	3/8-3/4
1861036	TH4B3621H	3.0 Ton 14 SEER 410A	230	12lbs – 4oz.	3/8-3/4
1861042	TH4B4221H	3.5 Ton 14 SEER 410A	230	12lbs – 7oz.	3/8 – 7/8
1861048	TH4B4821S	4.0 Ton 14 SEER 410A	235	15lbs – 4oz.	3/8 – 7/8
1861060	TH4B6021S	5.0 Ton 14 SEER 410A	256	14lbs – 10oz.	3/8-1-1/8

Units with "H" on the end are shipped with a hard start kit factory installed

Air Conditioning

QH4 SERIES 14 SEER HEAT PUMPS 2.0 - 5.0 TON QUICK CONNECT FITTINGS FOR MANUFACTURED HOUSING R-410A

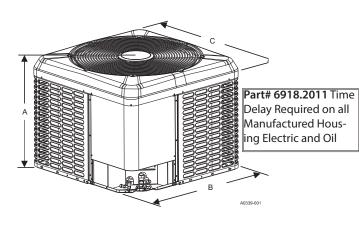



General Supply Inc. 317.856.4300 Toll Free 800.479.2754 www.generalsupplyinc.com

Air Conditio

Revolv "Accu-Charge" A-Coils For Manufactured Housing

The Revolv ® R410A Coil series is designed to be The Environment Friendly choice to be installed on new and existing Manufactured Housing furnaces. (Special drain pans are available for upflow gas and oil applications)

Features

- Factory Installed TXV valve suitable for A/C or Heat Pump
- Coil has built-in strainer for coil protection

Revolv[™] R410A Manufactured A-Coils

- Factory Installed TXV. suitable for A/C or Heat Pump application
- UL listed and tested to 500 p.s.i. Code approved 2-opening drain pan
- Dry-type pan does not maintain standing water
- Kit contains drain hose, fittings, and furnace cover plates for gas/oil furnaces
- Compatible with Coleman, Evcon, Vexar, Red T, Mortex, Nordyne, Intertherm, and Miller brands

Nominal Nominal Part Number Description HxWxD A/C size H/P size 14" x 18" x 19-5/8" 1830Q4A Coil-Revolv[™] QC R410A A/C or H/P 1.5 – 2.0 Ton 1.5 Ton Coil-Revolv[™] QC R410A A/C or H/P 2.0 – 3.0 Ton 2.0 Ton 18" x 18" x 19-5/8" 1836Q4A 1843Q4A Coil-Revolv[™] QC R410A A/C or H/P 2.5 – 3.5 Ton 2.5 - 3.5 Ton 16.5" x 18" x 19-5/8" Coil-Revolv[™] QC R410A A/C or H/P 18.5" x 18" x 19-5/8" 1854Q4A 4.0 – 5.0 Ton 2.5 - 4.0 Ton 1856Q4A 4.0 – 5.0 Ton Coil-Revolv[™] QC R410A A/C or H/P 4.0 - 5.0 Ton 24.5" x 18" x 19-5/8" **Relvov™ R410A Manufactured Home Coil Accessories** 18R72DB003 TXV Kit R410A Revolv™ 1.5 - 3.0 Ton 1.5 Ton 18R72DB004 TXV Kit R410A Revolv™ 2.5 - 5.0 Ton 4.0 – 5.0 Ton

Revolv R22 "Accu-Charge" A-Coils

Part Number	Description	Nominal A/C Size	Nominal H/P Size	H x W x D
1836QA-N	Coil-Revolv™ QC R22 A/C H/P Nitrogen	1.5 – 3.0 Ton	1.5 Ton	14" x 18" x 19-5/8"
1849QA-N	Coil-Revolv™ QC R22 A/C H/P Nitrogen	2.5 – 4.0 Ton	2.5 - 3.5 Ton	14" x 18" x 19-5/8"
1854QA-N	Coil-Revolv™ QC R22 A/C H/P Nitrogen	2.5 – 5.0 Ton	4.0 – 5.0 Ton	18.5" x 18" x 19-5/8"
	Revolv™ R22 Manufac	tured Coil Acces	sories	
1899910800	TXV Kit R22 Revolv™	1.5 – 3.0 Ton	1.5Ton	
1899910900	TXV Kit R22 Revolv™	2.5 – 5.0 Ton	4.0 – 5.0 Ton	
1899911101	Revolv™ Coil Universal Drain Pan			
	* Note refer to AHRI Listing for A	ctual Application	is and Capacities	



Revolv Coils work with many national brand A/C & Heat Pumps in 13 SEER or Higher. Check AHRI for specific applications

Air Conditioning

Air Conditioning Accessories



Pre-Charged Quick Connect Refrigerant Line Sets R410A

			Liquid Line	Suction Line	Insulation
Part No.	Description	Length	Diameter	Diameter	Thickness
134463Q1531	LINE-SET Q.C. R410A 15'- 3/8" X 3/4"	15'	3/4"	3/8"	3/8"
134463Q2031	LINE-SET Q.C. R410A 20'-3/8" X 3/4"	20'	3/4"	3/8"	3/8"
134463Q2531	LINE-SET Q.C. R410A 25'-3/8" X 3/4"	25'	3/4"	3/8"	3/8"
134463Q3031	LINE-SET Q.C. R410A 30'-3/8" X 3/4"	30'	3/4"	3/8"	3/8"
134463Q4031	LINE-SET Q.C. R410A 40'-3/8" X 3/4"	40'	3/4"	3/8″	3/8"
134463Q5031	LINE-SET Q.C. R410A 50'-3/8" X 3/4"	50'	3/4"	3/8"	3/8"
134473Q2031	LINE-SET Q.C. R410A 20'-3/8" X 7/8"	20'	7/8"	3/8"	3/8"
134473Q2531	LINE-SET Q.C. R410A 25'-3/8" X 7/8"	25'	7/8"	3/8"	3/8"
134473Q3031	LINE-SET Q.C. R410A 30'-3/8" X 7/8"	30'	7/8"	3/8"	3/8"
134473Q4031	LINE-SET Q.C. R410A 40'-3/8" X 7/8"	40'	7/8"	3/8"	3/8"
134473Q5031	LINE-SET Q.C. R410A 50'-3/8" X 7/8"	50'	7/8"	3/8"	






Sweat Fittings

Non-Charged Sweat-Fit Refrigerant Line Sets

			Liquid Line	Suction Line	Insulation
Part No.	Description	Length	Diameter	Diameter	Thickness
1324428251R	LINE-SET SWEAT FIT 25'-3/8" X 3/4"	25'	3/4"	3/8"	1/2"
1324428301R	LINE-SET SWEAT FIT 30'-3/8" X 3/4"	30′	3/4"	3/8"	1/2"
1324428501R	LINE-SET SWEAT FIT 50'-3/8" X 3/4"	50'	3/4"	3/8"	1/2"
1324558251R	LINE-SET SWEAT FIT 25'-3/8" X 7/8"	25'	7/8″	3/8"	1/2"
1324558501R	LINE-SET SWEAT FIT 50'-3/8" X 7/8"	50'	7/8″	3/8"	3/8"
13649S2541R	LINE-SET SWEAT FIT 25'-3/8" X 1-1/8"	25′	1-1/8″	3/8"	1/2"
13649S5041R	LINE-SET SWEAT FIT 50'-3/8" X 1-1/8"	50'	1-1/8"	3/8"	1/2"

Quick Connect to Sweat Fit Stub Kits For Line Sets



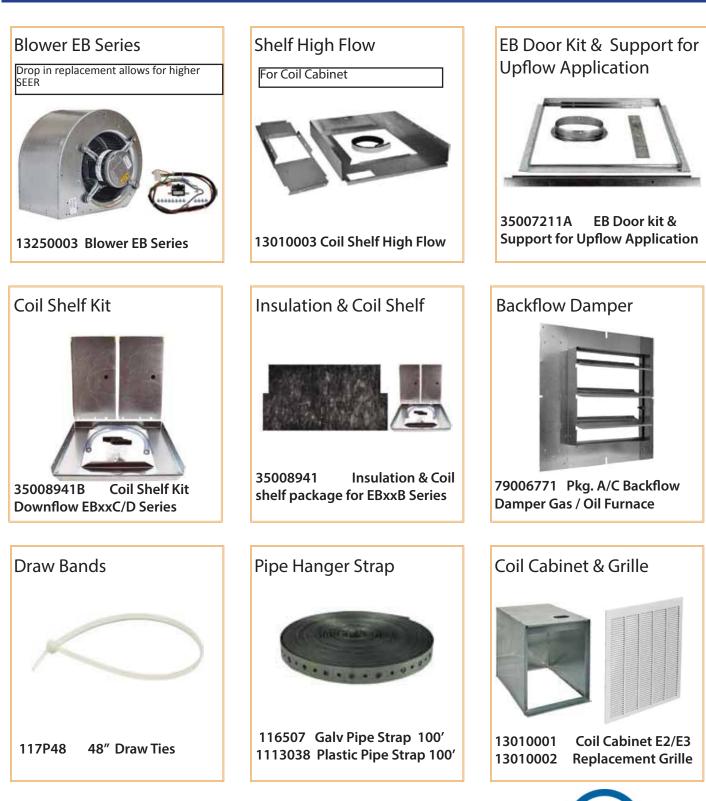



Air Conditioning Accessories

Manufactured Housing A/C - Heat Pump Accessories



119204 Heat Only 119206 Cool Only



General Supply Stocks a complete line of T-stats to meet every need. Listed here are some of our most popular models. To find what Stat is right for you, ask your General Supply Sales Professional!



```
113110350P 5-Wire H/C
```



General Supply Inc. 317.856.4300 Toll Free 800.479.2754 www.generalsupplyinc.com

42



Manufactured Housing A/C Accessories

Nordyne (Miller/Intertherm) Furnace Applications

Part No. 1395367411 **Description** Coil Cabinet With Filter

Blowers and Adaptors for Coleman Furnaces

Part No.	Description
1335006901	Blower -Coleman Electric 2 - 4 Tons
1335007901	Blower - Coleman Electric 4-5 Tons
1379006051	Blower - Coleman Gas DGAT 76-79000 Only 4 Ton A/C
1379006061	Blower - Coleman Gas DGAT 76-79000 Only 3.5 Ton A/C
1379007741	Blower - Coleman Gas DGAA,DGAH 4 Ton A/C
1379007751	Blower - Coleman Gas DGAA, DGAH 5 Ton A/C

Control Boxes for Older Nordyne (Miller/Intertherm) Furnaces

Part No. 1395367401

1395367111

1395367211

1393367771

Description

Control Package for Adding A/C-H.P. to FEXX Series Electric Furnace Control Package for Adding A/C-H.P. to E1EH Series Electric Furnace Control Package for Adding A/C H.P. to E2EH Series Electric Furnace Control Package for Adding A/C H.P. to MGH_ Series Gas Furnaces

Blowers and Adapters for Nordyne (Miller/Intertherm) Furnaces

Part No. 1395367301 1395367351 1888120854D 1393366901 1393367901

1887120805

Description

Blower - Nordyne Electric All FExx Series, E1EH Series Blower - Nordyne Electric E2EH Series Only Blower - Nordyne Electric E2EH, E2EB 4.0 Ton Blower - Nordyne Gas MAC,MGH Only Blower - Nordyne Gas M1G - M1M Series 2.0 - 4.0 Ton Blower - Nordyne Gas M1 Series 4.0 Ton

For Coleman Electric Furnace Applications Part No. Description 1335008941 Insulation and Coil shelf Package - for Downflow EBxxB Series 1335008941B Coil Shelf Kit Downflow EBxxC /EBxxD Series Insulation and Coil Shelf Package - for Upflow EBxxB Series 1335008961 1335007211 EB Door Kit & Door Support for Upflow Application EBxxC 4 Ton Half Louvered Door 1335019211 EBxxB 4 Ton Half Louvered Door 1335001581 1335001591 EB Series 5 Ton Full Louvered Door 1335009111 **EBxxC Solid Door - For Top Return** 1335001751 EBxxB Solid Door - For Top Return **Control Boxes for Older Coleman Furnaces** Part No. Description 1335005821 Control Package for Adding A/C-H.P w/2Wire (heat only)

		1-Stat to 5400, 5500 and EBXXAT unlaces
133500	5841	Control Packaged for Adding A/C - H.P. w/4Wire (heat/cool) T-Stat to 3400, 3500, and EBxxA Furnaces
137900	6021	Control Package for Adding A/C - H.P. w/2Wire (heat only) T-Stat to Older (pre 1996) Gas Furnaces
137900	6041	Control Package for Adding A/C - H.P. w/4wire (heat/cool) T-Stat to Older (pre 1996) Gas Furnaces

T-Stat to 3400 3500 and FRyvA Furnaces

Control Boxes for Older Nordyne (Miller/Intertherm) Furnaces

Part No. 1395367401

1395367211

Description

Control Package for Adding A/C-H.P to FExx Series Electric Control Package of Adding A/C - H.P. to E2EH Series Electric



General Supply stocks a large inventory of replacement parts and accessories for Coleman, Miller & Intertherm Gas and-Electric Furnaces. Just ask your General Supply sales rep for more information!





Requires Teach of the following			
112012	Accessory kit (see single wide for included items)		
1101225	12" x 25' Insulated flex duct R4		
11121212	12" x 12" x 12" Metal wye		

	······································
1101225	12" x 25' Insulated flex duct R4
11121212	12″ x 12″ x 12″ Metal wye
1112SBWD	Duct connector w/damper (1 required for install)
1112ATO	12" Collar for package units

Poquiros 1 each of the following

I		
	112012	Accessory kit (see single wide for included items)
	1101225	12" x 25' Insulated flex duct R4
	11121212	12" x 12" x 12" Metal wye
	1112SBWD	Duct connector w/damper (1 required for install)
	1112ATO	12" Collar for package units
I		


Double Wide Kit For Self-Contained Air Conditioners

with damper.)

Requires 1 each of the following Accessory Kit (Consists of 12" x 20" return box & grill, 112012 blue washable return air filter, 12" x 12" supply fitting

Single Wide Kit For Self-Contained Air Conditioners

12" x 25' Insulated flex duct. R4 1101225



Air Conditioning Accessories





Amana Package Terminal Air Conditioners and Heat Pumps with Electric Heat





Standard Features

- Energy Efficiencies: With EERs up to 11.7 and COPs up 3.4
- Quiet Operation: Amana PTACs have been redesigned to be the quietest PTAC they have ever built. The units's state -of-the-art design and construction provide a quiet environment Two Fan Motors Indoor tangential fan for quiet operation STC of 28
- Assembled in the USA for 30 Years: These units are assembled in Amana's Fayetteville, TN. Facility.
- Increased Dehumidification Capacity: Maintain lower humidity levels in rooms while cooling them without the need for expensive add ons. Guest feel more comfortable at higher temperatures, thus reducing cooling cost.
- **Seven Button Touch Pad:** Provides complete control to guest for in room comfort while maintaining energy efficiency.
- Five Year Limited Warranty: Enjoy one of the ost comprehensive warranties in the industry. First Year Parts and Labor. Second through fifth years, Parts and labor on certain sealed systems components. Second through fifth years, on certain functional parts only. For complete warranty details, visit www.amana-ptac.com
- **100% Run Tested:** All units are 100% run tested at our plant in Fayettevill, TN. including leak checks during manufacturing and again prior to shipment.
- **7-5/8" Unit Front Depth:** Enhance valuable room space with our slim unit front, which has a sleek 7-5/8" depth, one od shallowest silhouettes in the industry today. In addition, to inhibit guest tampering, the front can be secured to the chassis with a hidden screw
- **Removable Condenser Shroud:** Allows easy access to enaable regular cleaning of coils, which is essential to maintain unit efficiency and protect the compressor for long unit life
- Easy Pull out Filters: These filters are washable and easy to Maintain
- Filter Dryer for Sealed System Refrigerant: Standard in all units to protect the compressor and lengthen the life of the unit by removing moisture and preventing acid formation

Removable Cleanable Shroudmakes for easy cleaning

 G61015P
 PTC123G35Axxx
 42" P-Tak
 12,000 Btu / 3Kw Heat

 G61012P
 PBE123E35BX
 26" P-Tak
 12,000 Btu / 3Kw Heat

 G61012H
 PBH113E35BX
 26" Heat Pump
 13,000 Btu

 G61WS900
 42" Sleeve for PTC123G35Axxx

 G6126SLEEVE
 26" Sleeve for PBE123E35BX/PBH113E35BX



Window Air Conditioning units

Window a/c units from Frigidaire[®] and Crosley[®] are efficient as well as affordable. These units come in a variety of sizes to meet all of your needs. Many of these units are Energy Star[®] rated. Easy to install giving you cool air in just minutes. The perfect alternative when a split system unit is not a viable solution.

- EnergyStar[®] rated room air conditioner meets energy efficiency guidelines and uses up to 10 percent less energy than conventional models
- Electronic controls allow you to set the comfort level to your preference
- Remote control for precise temperature management from a distance
- Adjustable thermostat
- Anti-microbial filter reduces bacteria, odors and allergens
- 8-way air direction control
- 115 Volt
- 6' Cord
- 24 hour timer
- Auto Cool
- 3 Cooling fan speeds
- Sleep mode

_	

FRIGIDAIRE

		o þo	$\left(\right) $
FRIGIDAIRE		100 Million 100	IN SU
	-		_
=			

Part No.	BTU	Volt	Cooling Capacity	Weight	D x H x W
167014	5,000	110	150 Sq. Ft.	49 lbs	12" X 11.75" X 15.5"
167015	6,500	110	240 Sq. Ft.	49 lbs	15.5" X 12.5" X 18.5"
167016	8,000*	110	350 Sq. Ft.	62 lbs	15.5" X 12.5" X 18.5"
167018	10,000*	110	500 Sq. Ft	75 lbs	21.5" X 14" X 19"
167019	12,000*	110	650 Sq. Ft.	91 lbs	21.5" X 14" X 19"

* Energy Star Rated





Miller High Efficiency 13 SEER Split System AirConditioner For Manufactured and Modular Homes. Quick Connect Fittings

The DS4QD___ KA/B series use the more efficient and environmentally friendly R410A refrigerant. These units when combined with our matched indoor coils, offer a full line of quality split system air conditioning. These units are ideally sized for manufactured housing applications.

- R-410A Earth friendly non ozone depleting refrigerant
- Permantly Lubricated Motor A heavy duty PSC motor for long lasting reliability and quiet operation. Requires no maintenance
- Removable Top Grille Assembly Allows for ease of service from the top without disconnecting the fan motor leads
- **Composite Base Pan** Absorbs sound and is corrosion resistant. This composite is stronger and lighter than steel.
- Compressor All models utilize quiet and efficient Copeland Scroll Compressors
- **Steel Guard** Protects the unit coil from being damaged by hail, weed eaters, lawn mowers, balls, etc.





- 1 Year Limited Parts Warranty
- 5 Year Compressor Warranty
- 1 Year Mileage Warranty
- 1 Year Labor Warranty

Part #	Model #	Cooling	SEER	Refr.	Max	Total	Dimensions	Ship
		Capacity	Rtg.	Ozs.	Fuse	Amps	HxWxD	Weight
14Q024	DS4QD-024KB	24,000	13	90	25	13.5	23" x 22.75" x 22.75"	130
14Q030	DS4QD-030KB	29,400	13	96	30	14.8	27" x 23.75" x 22.75"	144
14Q036	DS4QD-036KB	35,400	13	104	35	17.8	27" x 23.75" x 22.75"	146
14Q042	DS4QD-042KA	39,500	13	124	40	19.31	31" x 30.75" x 30.75"	196
14Q048	DS4QD-048KA	45,000	13	127	50	23.2	31" x 30.75" x 30.75"	196
14Q060	DS4QD-060KA	58,000	13	160	60	27.6	43" x 30.75" x 30.75"	228

Miller Air Conditioner Condenser 13 SEER (Quick Connect Fittings)

Recommended Accessories

07911758 Fan Delay Kit (80 second fan delay)

07ICM856 Hard Start Kit (provides additional starting torque for the compressor)

Miller High Efficiency 14+ SEER Heat Pump

Systems for Mfd. & Modular Homes

The JT4QE Series Heat Pumps use a more efficient and environmentally friendly refrigerant designated R-410A. When combined with our engineered matched indoor coils, Miller offers a complete line of split system heat pumps ideally sized for Mfd. homes.

- R-410A Refrigerant Earth friendly non ozone depleating
- Permanently Lubricated Motor a heavy duty PSC motor for long lasting reliability and quite operation. Requires no maintenance
- Time/Temperature Defrost A reliable, industry standard control offers various time settings to meet any climate
- **Composite Base Pan** Absorbs sound and corrosion resistant. This composite is stronger and lighter than steel
- *Five Minute Restart Time Delay* When the unit shuts down, a five minute delay keeps the unit from restarting, eliminating the highest cause of compressor failure
- Hot Gas Muffler Reduces compressor noise and vibration
- *High Pressure Switch* Protects against abnormally high system pressures. Auto reset feature prevents nuisance service calls.
- Liquid Line Filter Drier Included with outdoor unit
- *Easy Compressor and Control Access* Designed to make easier for the contractor. Access panels provided for all controls

Medallion Series



• 1 Year Limited Parts

- 5 Year Compressor
- 1 Year Mileage

1 Year Labor

Part #	Model #	Cooling	SEER	Refr.	Max	Dimensions	Ship
		Capacity	Rtg.	Ozs.	Fuse		Weight
14MH024Q	JT4QE-024K	23,600	14	138	30	31.5" x 30.75" x 30.75'	' 144
14MH030Q	JT4QE-030K	29,200	14	145	25	39.5" x 30.75" x 30.75'	' 158
14MH036Q	JT4QE-036K	35,400	14	168	30	43.5" x 30.75" x 30.75'	' 167
14MH042Q	JT4QE-042K	39,000	14	243	40	43.5" x 30.75" x 30.75'	' 200
14MH048Q	JT4QE-048K	45,000	14	248	45	43.5" x 30.75" x 30.75'	' 202

Miller Heat Pump Condenser Units – 13 SEER

Recommended Accessories

07911758 Fan Delay Kit (80 second fan delay)

07ICM856 Hard Start Kit (provides addtional starting torque for compressor)

119207F Focus Pro H.Pump T-Stat


Miller High Efficiency 14 SEER Split System AirConditioner For Manufactured and Modular Homes. Quick Connect Fittings

Features and Benefits

- **Composite Base Pan:** Absorbs sound and corrosion resistant. Composite is also stronger and lighter than steel.
- **Durable, Attractive Cabinet:** Designed using galvanized steel with a polyester urethane finish. The 950 hour salt spray finish is 1.5 mil thick and resists corrosion 50% better than comparable units.
- **RemovableTop Grille Assembly:** Allows ease of service from the top without disconnecting fan motor leads.
- High Pressure Switch: Protects against abnormally high system pressures. Auto-reset feature prevents nuisance service visits.
- Liquid Line Filter Drier: Included with unit, field installed.
- One Piece Top/Orifice: Designed for maximum airflow and quiet operation.
- Easy Compressor and Control Access: Designed to make servicing easier for the contractor, access panels are provided to all controls and the compressor from the side of the unit.
- **Complete MetalWrapper:** Durable metal guard protects the coil from yard hazards and extreme weather.
- Anteater MC[®] Micro-Channel: All aluminum coils in all models which provides high corrosion resistance.







Part No.	Model No.	Cooling BTUh	Ref. Charge OZ*	SEER / EER **	Approx. Weight	Dimensions H x W x D
14E24Q	ES4QE-024KA	23,400	40 oz.	14 /12.2	134	31.5 x 22.34 x 22.75
14E30Q	ES4QE-030KA	29,000	53 oz.	14 /12.2	140	27.5 x 30.75 x 30.75
14E36Q	ES4QE-036KA	34,000	58 oz.	14 /12.2	155	35.5 x 30.75 x 30.75
14E42Q	ES6QF-042K	40,000	91 oz.	14 /12.2	217	43.0 x 30.75 x 30.75
14E48Q	SS6QF-048F	44,000	94 oz.	14 /12.2	227	43.0 x .30.75 x 30.75

*Charge listed is for Quick Connect units based on 15' line set. Sweat unit charges may vary

** Ratings based on Matched coil with E3/E4 Electric, M1&M7 or Coleman//Revolv Gas or Electric Furnace

Coil Match for E4/E6 14 SEER QC A/C with E3/E4 and M1/M7 Nordyne Furnaces									
Outdoor Unit	Indoor Unit	Coil Height	Cooling Capacity	SEER / EER					
ES4QE-024KA	C8QAMX24U-B	18"	23,400	14 / 12.2					
ES4QE-030KA	C8QAMX30U-B	18"	29,000	14 / 12.2					
ES4QE-036KA	C8QAMX36U-B	18"	34,000	14 / 12.2					
ES6QF-042K	C8QAMX42U-B	24" *	40,000	14 / 12.2					
ES6QF-048K	C8QAMX48U-B	24" *	44,000	14 / 12.2					
*When installing on M1/	M7 Gas Furnace the 92259	4 24" coil box is required							

Miller Package A/C and Heat Pumps

P7RE Series Packaged 14 SEER Air Conditioner R410A 2 - 5 Ton *Features*

• Quality Compressor: State of the art compressor is standard equipment.

• Hi Pressure Switches: Ensure long compressor life.

• Micro-Channel Coils: Both indoor and outdoor all aluminum coils are designed to optimize heat transfer, minimize size and cost, and increase durability and reliability. Eliminates corrosion.

• ECM Blower Motor: Fixed torque energy efficient brushless DC ECM motor.

• Permanently Lubricated Condenser Motor: A heavy duty PSC motor for long lasting reliability and quiet operation. Requires no maintenance and is completely protected from rain and snow.

• Low Voltage Transformer: Includes 3 Amp fuse to protect low voltage circuit.

• Liquid Line Filter Drier: Factory installed at a convenient location for service.

• Designed Using Galvanized Steel: With a polyester urethane coat finish. The 950 hour salt spray finish is 1.5 mil thick and resists corrosion 50% better than comparable units.


• Compact Footprint and Profile: Make the P7 Series easy to install and transport.

• 0" Clearance: To combustibles on duct side of the unit allows for installations in tight areas.

• Wire Guard Coated with Earth Friendly Epoxy and Plastic Mesh Hail Guard: A guard that will never rust and protects

P7RE 14 SEER Packaged A/C Units



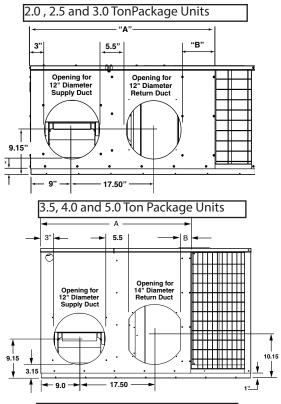

Heater Kits are Sold Separately

Part No.	Model No.	Cooling BTU/h	SEER /EER			Refrig. Charge	Ship Weight	Dimension
				Return	Supply		Lbs.	L x W x H
M9P024E	P7RE024K	23,800	14 / 11	12	12	55 oz.	242	49 x 35 x 22.2
M9P030E	P7RE030K	28,400	14 / 11	12	12	58 oz.	248	49 x 35 x 22.2
M9P036E	P7RE036K	35 <i>,</i> 000	14 / 11	12	12	58 oz.	242	49 x 35 x 22.2
M9P042E	P7RE042K	40,500	14 / 11	14	12	57 oz.	297	49 x 35 x 30.2
M9P048E	P7RE048K	47,000	14 / 11	14	12	70 oz.	300	49 x 35 x 30.2
M9P060E	P7REX60K	56 <i>,</i> 000	14 / 11	14	12	69 oz.	325	49 x 35 x 34.2

See Heat Chart and accessories for P7RE and Q7RE Heat Pumps

Miller Package A/C and Heat Pump

13 & 14 SEER Split System Condensers R-410A With Accu-Charge Fittings

- Composite Base Pan: Absorbs sound and is corrosion resistant. Composite is alsostronger and lighter than steel
- *Micro Channel Coils*: All aluminum coils in all models which provides high corrosion resistance
- *High Pressure Switch*: Protects against abnormally high system pressures. Auto-reset feature prevents nuisance service visits
- Louvered Condenser Guard: Durable metal guard protects the coil from yard hazards and extreme weather
- **Designed using Galavanized Steel**: With a polyester urethane coat finish. The 950 hour salt spray finish rersists corrosion 50% better than comparable uinits
- *Accu-Charge with FitRight fittings*: Correctly charged for fast easy installations



5 Year limited parts warranty 1 Year limited labor warranty 10 year limited compressor warranty

Model #	Description	Coil Match	Line Set	Dimension (D) X (W) X (H)	Pad
RSC1324	2.0 Ton 13 SEER Q.C. Cond	1836M4A	3/4 X 3/8	22¾ "X 22¾ "X 32½"	32 X 32
RSC1330	2.5 Ton 13 SEER Q.C. Cond	1836M4A	*3/4 X 3/8	30¾ "X 30¾ "X 28½"	32 X 32
RSC1336	3.0 Ton 13 SEER Q.C. Cond	1854M4A	*3/4 X 3/8	30¾″X 30¾ "X 36½"	32 X 32
RSC1342	3.5 Ton 13 SEER Q.C. Cond	1854M4A	7/8 X 3/8	30¾″X 30¾″X 44″	32 X 32
RSC1348	4.0 Ton 13 SEER Q.C. Cond	1856M4A	7/8 X 3/8	30¾″X 30¾″X 44″	32 X 32

Revolv© Split System Accu-Charge[™] Condensers 13 SEER

* Up to 24' for longer line sets us 7/8" x 3/8"

Revolv© 14 SEER Split System Condensers with Accu-Charge™

Model #	Description	Coil Match	Line Set	Dimension	Pad
				(D) X (W) X (H)	
RSC1424	2.0 Ton 14 SEER Q.C. Cond	C8QAMX24U-B	3/4 X 3/8	22¾ "X 22¾ "X 32½"	32 X 32
RSC1430	2.5 Ton 14 SEER Q.C. Cond	C8QAMX30U-B	*3/4 X 3/8	30¾ "X 30¾ "X 28½"	32 X 32
RSC1436	3.0 Ton 14 SEER Q.C. Cond	C8QAMX36U-B	*3/4 X 3/8	30¾″X 30¾ "X 36½″	32 X 32
RSC1442	3.5 Ton 14 SEER Q.C. Cond	C8QAMX42U-B	7/8 X 3/8	30¾″X 30¾″X 44″	32 X 32
RSC1448	4.0 Ton 14 SEER Q.C. Cond	C8QAMX48U-B	7/8 X 3/8	30¾″X 30¾″X 44″	32 X 32

* ¾" up to 24' 7/8" for longer than 24' line set

EB SERIES ELECTRIC FURNACES

- Heat Pump and A/C Ready
- **Built-In Insulated Coil Cabinet**
- 4 Ton A/C 3.5 Ton Heat Pump Blower Capacity
- Full Sequenced Heat to Protect Home Electronics
- Uplfow/Downflow Convertible •
- **Top/Front Return Air Convertible**
- Sound Absorbing Insulated Panels for **Quieter Operation**
- Universal Throw-away filter is easy to Replace

Model No,


EB10F

EB12F

EB15F

EF17F

EB20F



LBS.

83

84

85

86

84

86

HXWXD

51.5 X 19 X 24

	2
Coleman 😚	
HEATING & AIR CONDITIONING	
	-
	-

HEATING & AIR CONDITIO

Output

Btu @240V

34,000

39,000

51,000

55,000

67,000

	IMPO	RTANT	
		,	
C83523F	EB23F	77,000	

These units are shipped from the factory set up for dual power supply connections. For single power supply connections, jumper bars (P/N 3500-378P*) are required and are available from the factory. See Figure 12.

All installation on field wiring must be rated at 60°C or higher.

Models for EB15F, EB17F, EB20F, and EB23F may be connected to a single or dual branch circuit.

TABLE 2: Wiring Requirements

Part No.

C83510F

C83512F

C83515F

C83517F

C83520F

MODELS	EB10F ¹	EB12F ²	EB15F ¹		EB	EB17F ¹ EB2		20F ¹	EB2	23F ³
Single Branch Circuit Service			•	2 L	eads + 1 G	round CK	r #1		•	
Nominal Circuit Load - Amps	44.0	50.7	64	1.0	70).7	84.0		94.0	
Minimum Wire Size (90°C)	#8	#6	#	4	#	ŧ4	#	3	#	2
Minimum Wire Size (75°C)	#6	#6	#	4	#	[‡] 3	#	2	#	1
Minimum Wire Size (60°C)	#6	#4	#	3	#	[‡] 2	#	1	#	0
Ground Wire Size +	#10	#8	#	8	#8		#6		#6	
Max. Fuse (or C.B.) - Amps	60	70	8	0	90		110		125	
Dual Branch Circuit Service			CKT #1	CKT #2	CKT #1	CKT #2	CKT #1	CKT #2	CKT #1	CKT #2
Branch Circuit Load - Amps	1		44.0	20.1	47.3	23.4	44.0	40.0	47.3	46.7
Branch Circuit Min Amps	1		55.0	25.2	59.2	29.3	55.0	50.0	59.2	58.4
Minimum Wire Size (90°C)	N	ТС	#8	#10	#6	#10	#8	#8	#6	#6
Minimum Wire Size (75°C)	APPR	OVED	#6	#10	#6	#10	#6	#8	#6	#6
Minimum Wire Size (60°C)	1			#10	#4	#10	#6	#6	#4	#4
Ground Wire Size ⁴	1			#10	#10	#10	#10	#10	#10	#10
Max. Fuse (or C.B.) - Amps	1		60	30	60	30	60	50	60	60

1. Does Not require a Jumper.

2. Jumper provided for Single Branch Circuit Only.


3. Requires Jumper Bars (P/N 3500-378P) - Dual Supply for U.S. Only. 4. Refer to National Electrical Code. Table 250-122 for Non-Sheathed Conductor Ground Wire.

If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You

53

Gas & Electric Furnaces

Gas & Electric Furnaces



EBxxF Series Factory Replacement Parts

	EB SERIES [™] ELECTRIC FURNACE ACCESSORIES
Part No.	Item Descripton
1335019111	EBxxC Solid Coleman Door
1335019211	EBxxC 4 Ton Coleman Door
1335019311	EBxxC 5 Ton Coleman Door
083500347P	Bus Bar Kit EB
1335007211	Upflow EB Door Kit & Door Support
1335007901	5 Ton Blower Package for EB Furnace
1335008941	Coil Shelf W/Insulation- Downflow EBxxB Series
1335008941B	Coil Shel Kit – Downflow EBxxC Series
1335008961	Upflow coil Shelf W/Insulation
1335005451	EB Upflow Filter Box

<

ITEM	1 DESCRIPTION		EB10F	EB12F	EB15F	
	Front Panel (Insulated)		3501-9111	3501-9111	3501-9111	
1	Filter (20 x 20 x 1) (Front Retur	rn Panel)	S1-1214-2521	S1-1214-2521	S1-1214-2521	
2*	Front Panel (Louvered, 4-To		3501-9211	3501-9211	3501-9211	
(Opt)	Front Panel (Front Return, 5	5-Ton)	3500-1591	3500-1591	3500-1591	
3	Filter (16 x 20 x 1)	,	S1-1214-2511	S1-1214-2511	S1-1214-2511	
4	Support Angle.Top (Door)		S1-3500-1861	S1-3500-1861	S1-3500-1861	
5	Cover, Electric Box		S1-3500-2351/A	S1-3500-2361/A	S1-3500-2361/A	
6	Cover (Service Entrance)		S1-3500-1271	S1-3500-1271	S1-3500-1271	
-	Sub-base (Optional)		S1-3500-1071/B	S1-3500-1071/B	S1-3500-1071/B	
7	Sub-base (M10) (Optional)		3500-5221	3500-5221	3500-5221	
8						
9	Blower Housing		S1-37323744001	S1-37323744001	S1-37323744001	
10	Blower Motor		S1-02427651000	S1-02427651000	S1-02427651000	
11	Capacitor (7.5MFD/370V)		S1-02420045700	S1-02420045700	S1-02420045700	
12	Relay, Fan		S1-3110-3301	S1-3110-3301	S1-3110-3301	
13	Motor Mount Assembly Kit ((1PC)	S1-37319831002	S1-37319831002	S1-37319831002	
14	Blower Wheel		S1-02632627700	S1-02632627700	S1-02632627700	
15	Sequencer		S1-3110-3571	S1-3110-3571	S1-3115-3571	
16	Transformer (240/24V-40A)		S1-3300-3861	S1-3300-3861	S1-3300-3861	
	Heater Element Assembly w/Limit and		(9.6Kw)	(11.2Kw)	(4.8Kw) & (9.6Kw)	
17	Jumper Wire		S1-02541236000	S1-02541238000	S1-02541237000	
					S1-02541236000	
18	Limit Switch		S1-02541249000	S1-02541249000	S1-02541249000	
	_		(Open 200, Close 140)	(Open 200, Close 140)	(Open 200, Close 140)	
19	Fusible Link		S1-02541250000	S1-02541250000	S1-02541250000	
20	Bracket (Circuit Breaker)		3500-128	3500-128	3500-128	
21	Circuit Breaker (1 Req'd)		S1-3500-377P/A			
	Circuit Breaker (2 Req'd)			S1-3500-377P/A	S1-3500-377P/A	
22	\ \	ee Note 2)	S1-3500-378P	S1-3500-378P	S1-3500-378P	
23	Ground Lug (Large)		1216-231	1216-231	1216-231	
-	Ground Lug (Small)				S1-02521798000	
24		ee Note 1)	S1-02922184001	S1-02922184001	S1-02922184001	
25		ee Note 1)	S1-3240-3051	S1-3240-3051	S1-3240-3051	
26	· · · · · · · · · · · · · · · · · · ·	ee Note 1)	3500-174	3500-174	3500-174	
27		ee Note 1)	3500-171	3500-171	3500-171	
28	Ferrule (3 Req'd)		S1-02320541000	S1-02320541000	S1-02320541000	
29	Grommet (3 Req'd)		S1-02814740000	S1-02814740000	S1-02814740000	
30	Fuse		S1-02532746026	S1-02532746026	S1-02532746026	
31*	Wiring diagram		5166485	5166512	5166513	
32*	Filter (16x20x1)		S1-1214-2511	S1-1214-2511	S1-1214-2511	
33*	Cover, Service		S1-3500-1271	S1-3500-1271	S1-3500-1271	
34	Relay, Control		S1-02436281000	S1-02436281000	S1-02436281000	



DTE: *Not Shown

New replacement parts shown in **bold** face type at the first printing of parts list dated 12/15. Major components and suggested stocking items are shown with shaded item number.

"<" Across from row indicates a change in that row.

--- Not applicable to specified model.

All parts with three digit suffix numbers are "Special Order" parts. These parts are subject to factory availability and require extra time for delivery.

availability and require extra time for delivery.1 Not Standard with furnace, contained in accessory kit no. 3500-8941/B.

2 Standard on EB12F.

General Supply Inc. 317.856.4300 Toll Free 800.479.2754 www.generalsupplyinc.com

L



54

Gas & Electric Furnaces

HEATING & AIR CONDITIONING

DGAA SERIES GAS FURNACES

- 80% + AFUE Manufactured Housing Gas Furnaces
- A/C Ready to 4 Tons
- Full Louver High Impact Plastic Return Air Door
- Standard Replaceable Filters (Included)
- Fail-Safe Auto Igniton Systym



DGAA Series Gas/Propane 80% Furnaces A/C Ready up to 4 Tons DGAA Series Gas/Propane 80% Low Profile Furnaces Heat Only

Part No.	Description	Output BTUH	Input BTUH	Dimension	Weight				
C85556D	DGAA 056BDTD	45,000	56,000	76"x19.5"x24.5"	145 lbs				
C87056D*	DGAH056BDTD	47,000	56,000	60"x19.5"x24.5"	131 lbs				
C85570D	DGAA070BDTD	56,000	70,000	76"x19.5"x24.5"	145 lbs				
C85575D	DGAA077BDTD	62,000	77,000	76"x19.5"x24.5"	146 lbs				
C87070D*	DGAH077BDTD	62,000	77,000	60"x19.5"x24.5"	131 lbs				
C85590D DGAA090BDTD		72,000	72,000 90,000		159 lbs				
* Heating O	* Heating Only Compact Gas/Propane HUD Approved 80% Gas Furnaces								

DGAA SERIES GAS FURNACES PARTS BREAKDOWN

General Supply Stocks a Complete Line of Replacement Parts for These Furnaces and Older Series . Contact Your General Supply Sales Rep for Additional Parts List and Diagrams

DGAA Series Parts List

	DGAA										
ITEM DESCRIPTION		DGAA056BDTD	DGAA070BDTD	DGAA077BDTD	DGAA090BDTD						
1	Switch, Pressure	S1-32435972000	S1-32435972000	S1-32435972000	S1-32435972000						
2	Tubing Silicone (2 Ft. Req'd)	S1-02812499001	S1-02812499001	S1-02812499001	S1-02812499001						
3	Limit Switch, Manual (Upper)	S1-02535358000	S1-02535358000	S1-02535358000	S1-02535358000						
4	Assembly, Booster (w/Motor)	S1-37319801821	S1-37319801821	S1-37319801821	S1-37319801821						
5	Control Board, Integrated	S1-03101932002	S1-03101932002	S1-03101932002	S1-03101932002						
6	Valve, Gas	S1-02543267000	S1-02543267000	S1-02543267000	S1-02543267000						
7	Bracket, Mounting (Gas Valve)	S1-37319801063	S1-37319801063	S1-37319801063	S1-37319801063						
8											
9	Exchanger, Heat (w/Gaskets)	S1-37319804651	S1-37323792001	S1-37323792002	S1-37323792003						
10	Sensor, Flame	S1-02535354000	S1-02535354000	S1-02535354000	S1-02535354000						
11	Switch, System	S1-7681-3301	S1-7681-3301	S1-7681-3301	S1-7681-3301						
12	Transformer (115-24V, 40 VA)	S1-2940A3541	S1-2940A3541	S1-2940A3541	S1-2940A3541						
13 Switch, Limit		S1-02535380000	S1-02535380000	S1-02535381000	S1-02535381000						
14	Burner Assembly, Auto Ignition (Includes items 10 & 15)	S1-37319801403	S1-37319801403	S1-37319801403	S1-37319801403						
15	Ignitor, Hot Surface	S1-32541021000	S1-32541021000	S1-32541021000	S1-32541021000						
16	Filter (2 Req'd) (16x20x1)	S1-1214-2511	S1-1214-2511	S1-1214-2511	S1-1214-2511						
17	Panel, Door (Upper)		Accessory (See Page 4)							
18	Panel, Door (Lower, Tall)	7900-7611	7900-7611	7900-7611	7900-7611						
19	Motor	S1-02436226000	S1-02436266000	S1-02436266000	S1-02436266000						
20	Assembly, Motor Mount	S1-37319806100	S1-37319806100	S1-37319806100	S1-37319806100						
21	Plug, Connector	S1-02521192000	S1-02521192000	S1-02521192000	S1-02521192000						
22	Capacitor)	S1-02435813000	S1-02435813000	S1-02435813000	S1-02435813000						
23	Wheel, Blower	S1-02619654703	S1-02619654703	S1-02619654703	S1-02619654703						
24*	Top, Casing	S1-07319801342	S1-07319801342	S1-07319801342	S1-07319801342						
25*	Diagram, Wiring	1067164	1067164	1067164	1067164						
26*	Strike, Door	S1-02118364000	S1-02118364000	S1-02118364000	S1-02118364000						
27*	Latch, Door	S1-02118365000	S1-02118365000	S1-02118365000	S1-02118365000						
28*	Housing, Blower	S1-37323864001	S1-37323864001	S1-37323864001	S1-37323864001						
29*	Gasket, Combustion Air Box	S1-01006900005	S1-01006900005	S1-01006900005	S1-01006900005						
30*	Gasket, Burner	S1-01006742000	S1-01006742000	S1-01006742000	S1-01006742000						
31*	Gasket, Booster Assembly	S1-01006900015	S1-01006900015	S1-01006900015	S1-01006900015						
32*	Gasket, Heat Exchanger	S1-01006900001	S1-01006900001	S1-01006900001	S1-01006900001						

NOTE: *Not Shown

New replacement parts shown in **bold** face type at the first printing of parts list dated 12/15.

Major components and suggested stocking items are shown with shaded item number.

"<" Across from row indicates a change in that row.

--- Not applicable to specified model.

BURNER ORIFICE CHART (Normal Altitude Only, See Note 5)										
MODEL	056	070	077	090						
NATURAL GAS	S1-9951-1361	S1-9951-1541	S1-9951-1611	S1-9951-1771						
LP GAS	S1-9951-0821	S1-9951-0931	S1-9951-0981	S1-9951-1061						

Please note orifice size listed at sea level to 2,000 feet above sea level. For higher altitides refer to your iinstallation manual

If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You

57	

Gas, Oil, & Electric Furnaces

VMC[™] SERIES 95%+ GAS FURNACES

- Easy to Install- Fits Standard Manufactured Housing Furnace Foot Print
- Easy Conversion From Natural Gas to Propane All units have convertible gas
 valves
- A/C Ready - Up to 4 Tons A/C
- Hi-tech Tubular Aluminized Steel Primary Heat Exchanger
- Timed on, Adjustable Off Blower, Capability, for Maximum Comfort.
- Quiet Inducer Operation
- 5 Year Parts Lifetime Heat Exchanger Warranty



VMC Series 95% AFUE With Built in Coil Cabinet and Standard Mfd. Home Furnace Foot Print.

> VMA Series 95% AFUE With Optional 18" and 24" Coil Cabinets for HIgh Efficiency Coils





Part No.	Model No.	Decscription	Dimension inches	Weight
C8540001	VMA1-50N	95% Gas Furnace 50,000 Btu	57 x 18-3/4 x 25-3/4	175
C8540002	VMA1-75N	*95% Gas Furnace 75,000 Btu	57 x 18-3/4 x 25-3/4	175
C8540005	VMC1-50N	95% Gas Furnace 50,000 Btu	76-1/8 x 18-3/4 x 25-3/4	205
C8540006	VMC1-75N	*95% Gas Furnace 75,000 Btu	76-1/8 x 18-3/4 x 25-3/4	205
*			•	

* VMC Furnace series includes coil box





Gas, Oil, & Electric Furnaces

GAS FIRED CONDENSING MOBILE HOME FURNACE SPECIFICATIONS CMC1

۶

VMC Furnace Specifications

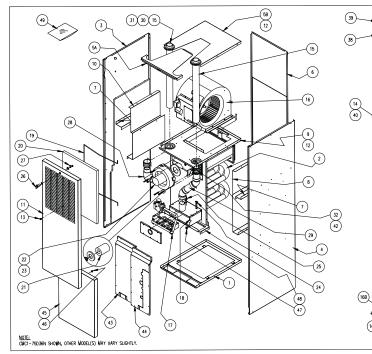




Ó

6



	PARTS UNIT CMC1-50D36N CMC1-75D36N		CMC1-50D	V3N	CMC1-75DV3N				
iteM	DESCRIPTION	PART NO.		PART NO.		PART NO.		PART NO.	QTY.
1	BASE	19108	1	19108	1	19108	1	19108	1
2	HEAT EXCHANGER	39124	1	39125	1	39124	1	39125	1
3	SIDE CASING, LEFT	629128-6	1	629128-6	1	629128-6E	1	629128-6E	1
4	SIDE CASING, RIGHT	629129-6	1	629129-6	1	629129-6E	1	629129-6E	1
5 A	TOP, FRONT	619131-7	1	619131-7	1	619131-7	1	619131-7	1
ĞВ	TOP, REAR	619172-7	1	619172-7	1	619172-7	1	619172-7	1
6	CASING, REAR	619130-6	1	619130-6	1	619130-6	1	619130-6	1
7	BAFFLE STAND-OFF	-	-	19118	2	-	-	19118	2
8	BAFFLE, AIR SIDE, RIGHT	19117	1	19173	1	19117	1	19173	1
9	BLOWER PAN	19109	1	19109	1	19109	1	19109	1
10	BAFFLE, AIR SIDE, LEFT	19116	1	19119	1	19116	1	19119	1
11	FRONT DOOR	619126-7	1	619126-7	1	619126-7	1	619126-7	1
12	GROMMET, VINYL 2500	350007	4	350007	4	350007	4	350007	4
13	WINDOW PLUG, CLEAR	350276	1	350276	1	350276	1	350276	1
14	TRAP ASSSEMBLY	320916	1	320916	1	320916	1	320916	1
15	VENT/INTAKE PIPE, 2" PVC	19121	2	19121	2	19121	2	19121	2
16	BLOWER ASSEMBLY	S00S4178	1	S00S4178	1	S00S4194	1	S00S4195	1
16A	BLOWER HOUSING W\ WHEEL	S00S4508	1	S00S4508	1	S00S4508	1	S00S4508	1
16A1	BLOWER WHEEL	340108	1	340108	1	340108	1	340108	1
16B	MOTOR BRACKET ASSEMBLY	AOPS7670	1	A0PS7670	1	A0PS7670	1	A0PS7670	1
16C	MOTOR	A0PS7657	1	A0PS7657	1	350274	1	350275	1
16D	CAPACITOR BOOT	350036	1	350036	1	-	-	-	-
16E	CAPACITOR	350073	1	350073	1	-	-	-	-
16F	AUX LINIT SWITCH	350891	1	350891	1	350891	1	350891	1
16G	INTEGRATED FAN CONTROL	350836	1	350836	1	350836	1	350836	1
16H	TRANSFORMER	350464	1	350464	1	350464	1	350464	1
16J	BLOWER HARNESS	350781	1	350781	1	350781	1	350781	1
17	BURNER DRAWER ASSEMBLY	S00S8219	1	S00S8216	1	S00S8219	1	S00S8216	1
17A	BURNER TUBE	380595	2	380595	3	380595	2	380595	3
17B	MANIFOLD	380726	1	380670	1	380726	1	380670	1
17C	ORIFICE	380600	2	380600	3	380600	2	380600	3
17D	GROMMET	360434	1	360434	1	360434	1	360434	1
17E	GAS VALVE	A0PS7744	1	AOPS7744	1	AOPS7744	1	AOPS7744	1
18	BURNER BOX ASSEMBLY	S00S8218	1	S00S8215	1	S00S8218	1	S00S8215	1
18A	LIMIT SWITCH (ROLL OUT)	350485	1	350485	1	350485	1	350485	1
188	SIGHT GLASS GASKET	330135	1	330135	1	330135	1	330135	1
18C	SIGHT GLASS	615887	1	615887	1	615887	1	615887	1
18D	SILICONE SPONGE GASKET 1/2"	330141	1.9'	330141	2.4	330141	1.9'	330141	2.4
18E	SILICONE SPONGE GASKET 1*	330140	1.6'	330140	2.2	330140	1.6'	330140	2.2
	FILTER RETAINER ROD	14809	1	14809	1	14809	1	14809	1
19									

	PARTS UNIT	CMC1-50D36N		CMC1-75D36N		CMC1-50DV3N		CMC1-75D	V3N
ITEM	DESCRIPTION	PART NO.	QTY.	PART NO.	QTY.	PART NO.	QTY.	PART NO.	QTY.
21	SPACER, NYLON 3/8 ODx 1/2 L	300373	1	300373	1	300373	1	300373	1
22	INDUCER	340330	1	340330	1	340330	1	340330	1
23	INDUCER GASKET	330137	1	330137	1	330137	1	330137	1
24	IGNITER	380650	1	380650	1	380650	1	380650	1
25	FLAME SENSOR	350759	1	350759	1	350759	1	350759	1
26	CAM LATCH ASSEMBLY	320904	1	320904	1	320904	1	320904	1
27	CAM	320905	1	320905	1	320905	1	320905	1
28	VENT/DRAIN ELBOW ASSEMBLY	320903	1	320903	1	320903	1	320903	1
29	COMBUSTION AIR INTAKE ASS'Y	320924	1	320924	1	320924	1	320924	1
30	RADIATOR HOSE	410017	1	410017	1	410017	1	410017	1
31	HOSE CLAMP	300276	2	300276	2	300276	2	300276	2
32	DRAIN FITTING	320913	1	320913	1	320913	1	320913	1
33	PRESSURE SWITCH	AOPS7520	1	AOPS7520	1	AOPS7520	1	AOPS7520	1
34	LIMIT SWITCH	350495	1	350817	1	350495	1	350817	1
35	VESTIBULE WIRE HARNESS	350195	1	350195	1	350195	1	350195	1
36	SUPPLY WIRE HARNESS	350893	1	350893	1	350893	1	350893	1
37	GROUND WIRE HARNESS	350892	1	350892	1	350892	1	350892	1
38	DOOR SWITCH	350262	1	350262	1	350262	1	350262	1
39	J-BOX	350024	1	350024	1	350024	1	350024	1
40	TRAP MTG BRACKET	19053	1	19053	1	19053	1	19053	1
41	TUBING ASSEMBLY	S00S4185	1	S00S4185	1	S00S4185	1	S00S4185	1
42	FITTING, NYLON INSERT	300371	1	300371	1	300371	1	300371	1
43	COIL ACCESS PANEL, LEFT	619111	1	619111	1	619111	1	619111	1
44	COIL ACCESS PANEL, RIGHT	619112	1	619112	1	619112	1	619112	1
45	DOOR, COIL ACCESS	619127-7	1	619127-7	1	619127-7	1	619127-7	1
46	STRIKE	320209	2	320209	2	320209	2	320209	2
47	LATCH	320208	2	320208	2	320208	2	320208	2
48	SEPARATOR PANEL, HORIZONTAL	19110	1	19110	1	19110	1	19110	1
49	PARTS PACKAGE	S00S4190	1	S00S4191	1	S00S4244	1	S00S4245	1
49A	J-BOX COVER	350020	1	350020	1	350020	1	350020	1
49B	RADIATOR HOSE	410017	2	410017	2	410017	2	410017	2
49C	HOSE CLAMP	300276	4	300276	4	300276	4	300276	4
49D	CPVC X PVC ADAPTER	320833	1	320833	1	320833	1	320833	1
49E	LP CONVERSION KIT	A0PS7741	1	AOPS7742	1	AOPS7741	1	AOPS7742	1
49F	GASKET, DRAIN KNOCK-OUT	330355	1	330355	1	330355	1	330355	1
49G	GROMMET, VINYL 3/8"	350040	1	350040	1	350040	1	350040	1
49H	GROMMET, VINYL 7/8"	350009	1	350009	1	350009	1	350009	1
49J	COIL TRIN PANEL	619113	1	619113	1	-	-	-	-
49K	BUSHING, UB-875	350750	1	350750	1	350750	1	350750	1
49L	BUSHING, SR34-2	350016	1	350016	1	350016	1	350016	1



(ROOF JACK RETROFIT)

CONCENTRIC VENT KIT# AOPS748.

Manufactured Gas Furnace Accessories

Furnace Accessories Used With DGAA,DGAH,DFAA,DFAH Series							
Part No.	Description						
C840006941	Removable Crown Assembly						
C840004241	Roof Jack Sealant 24/ctn. Sold each						
C84005441	Chimney Crown						
C840007101	Roof Jack 86" – 95" Floor to Flange of Roof						
C840007121	Roof Jack 91" – 102" Floor to Flange of Roof						
C840007141	Roof Jack 99" – 120" Floor to Flange of Roof						
C840007151	Roof Jack 106" – 132" Floor to Flange of Roof						
C840008161	Roof Jack 104" – 115" Floor to Flange of Roof						
C840008181	Roof Jack 115" – 145" Floor to Flange of Roof						
C876806541	External Roof Extension – 18"						
C876602841	Ceiling Ring (1 ea = 2 pcs.)						
C879006111	Internal Roof Extension 11" Height						
C879006171	Internal Roof Extension 17" Height						
C879906211	Duct Connector 1" Folding Mounting Tabs						
C879006211	Duct Connector 2" Folding Mounting Tabs						
C879006241	Duct Connector 4" Folding Mounting Tabs						
C879006261	Duct Connector 6" Folding Mounting Tabs						
C879906301	Duct Connector 10" Folding Mounting Tabs						
113110350P	Heat/Cool Stat 4 – 5 Wire						
119205D	Digital Heat/Cool Stat 4 – 5 Wire						
Furnace Accessorie	es Used With MG9S Series Gas Furnaces						
C892557171	Filter Rack Kit 17.5" MG9S Downflow Furnace						
C892557211	Filter Rack Kit 21" MG9S Downflow Furnace						
C892551620	Return Air Box 17.5" Cabinet MG9S						
C892552020	Return Air Box 21" Cabinet MG9S						
C892552520	Return Air Box 24.5" Cabinet MG9S						
C891556211	1" Duct Connector Fingertab						
C891556241	4.5" Duct Connector Fingertab						
C891556261	6.5" Duct Connector Fingertab						
C891556281	8.5" Duct Connector Fingertab						
C89155835	Coil Cabinet D/UGA/Mg9S 17.5", 21"						
C81CB0517	Sub Base – Combustible MG9S 17"						
C81CB0521	Sub Base – Combustible MG9S 21"						
C81CB0524	Sub Base – Combustible MG9S 24"						



Chimney Crown Assy



Removable Roof Jack Crown Assy.



Duct Connector With Mounting Tab DG/DFSeries



Roof Jacks With Movable Roof Mounting Flange To Adjust Roof Pitch Up To 22*

BURNER ORIFICE CHART (Normal Altitude Only*)										
Model	056	070	077	090						
Natural Gas	S1-99511-1361	S1-9951-1541	S1-9951-1611	S1-9951-1771						
LP Gas	S1-9951-0821	S1-9951-0931	S1-9951-0981	S1-9951-1061						
* Contact your authorize	* Contact your authorized Coleman rep for installations at altitudes over 2000 feet above sea level									

Misc. Heating & Cooling Accessories

A.C. Disconnect Switch



5980<mark>64 Nonfusable 60 amp</mark> Disconnect

Liquid Tite Connectors



 598042
 1/2" Straight Connector

 598043
 3/4" Straight Connector

 598045
 1/2" 90* Elbow Connector

 598046
 3/4" 90* Elbow Connector



Liquid Tite Conduit Register Collars Refrigerant R-22 & R-410A (Requires EPA Certification) T Coolgas R22 13FRFON30 R-22 30 Lb Cannister 1FREON410AR- 410 A 25 lb Can-598040 1/2" Conduit 100' Roll 11486 4"W x 8"D x 6"Long nister 598041 3/4" Conduit 100' Roll 114106 4"W x 10"D x 6"Long

A/C Pads Evenly distribut Resist breakage available in mar	5		Furnac	e Filters
				Tech Blue V 19″x36″ Fo
1124242	24″ x 24″ x 2″ Pad		11720	Fiter Retain
1124362	24" x 36" x 2" Pad		1161026	16″ x 36″ F
1130302	30″ x 30″ x 2″ Pad		1163054	19″ x 54″ F
1136362	36″ x 36″ x 2″ Pad		119401	Metal Filte
1136482	36" x 48" x 2" Pad		119402	Metal Filte
			112215	16″ x 20″ x
		Other Sizes Available		

110611 Tech Blue Washable Filter
1162036 19"x36" Foam Filter Coleman
11720 Fiter Retainer Coleman
1161026 16" x 36" Foam Filter Nordyne
1163054 19" x 54" Foam Filter Nordyne
119401 Metal Filter Nordyne Electric
119402 Metal Filter 15.9" x 19" (pair)
112215 16" x 20" x1" Disposable Filter

Nordyne Gas Funaces

Revolv RG7 95%+ AFUE Gas Furnace



Extremely efficient: for lower gas bill **Dependable silicone-nitride hot surface igniter:** utilizes proven SmartLife[®] technology for longer igniter life

Stainless steel scondary heat exhcanger for a long life May be vertically or horizontally vented using a twopipe system for maximum flexibility in installation. Fully insulated cabinet minimizes heat loss and provides quiet operation.

Diagnotstic lights provide easy troubleshooting *LP convertible*, just a simple burner orifice and gas valve regulator change for ease of convertibility. *Color coded wire harnes*s designed to fit the components all with quick-connect fittings for ease of service and replacement

Mutli-speed direct drive blower designed to give a wide range of cooling capacities. Switches on PCB, provide ultra ease motor speed selection. 40 Va transformer included.

Appliance quality door protects against rust and other corrosion. Baked on enamel finish allows for easy cleaning

* Use additional coil cabinet above 3.0 ton a/c or Heat Pump

Warranty 2 Year Parts / 1 Year Labor 10 Years Heat Exchanger Visit www.stylecrestinc.com for warranty rergistration

Model #	Description	Input / Output Btu		A/C Ready	Allowabl Inlet /	Sizing eLengths Outlet *	Shipping Weight Lbs
					3" Dia	2" Dia	
RG7D45N4	95% Dwnflw. 45KBTU W/O Cab	45K	42.75K	4 Ton	60'	30'	150
RG7D60N4	95% Dwnflw. 60KBTU W/O Cab	60K	57K	4 Ton	60'	30'	150
RG7D72N4	95% Dwnflw. 72KBTU W/O Cab	72K	68.4K	4 Ton	60'	30'	155
RG7D45C4	95% Dwnflw. 45KBTU W/ Cab	45K	42.75K	4 Ton	60'	30'	170
RG7D60V4	95% Dwnflw. 60KBTU W/ Cab	60K	68.4K	4 Ton	60'	30'	170
RG7D72C4	95% Dwnflw. 72KBTU W/ Cab	72K	68.4K	4 Ton	60'	30'	175

** Subtract 3.5ft. for every additional 3" 90° elbow 2 45° elbows equal 1 90° One short radius elbow is Equal to 2 long radius elbow. Do not include termination elbows. Applicable from sea level to 2,000 above sea level. Reduce maximum length by 8% per every additional 1,000 ft. above sea level

Revolv RG1 Series 80% AFUE Gas Furnaces

With Coil Cabinet





Sealed Combusted: Vents exhaust gases directly outdoorsand draws in outside fresh air for combustion

Choice of Models: For up to 4 Tons A/C and 3.5 Tons H.P.*

Hot Surface Ignition: Electronically fired - no pilot lights to blow out

Low Maintenance: Sealed Bearing on motors, reliable controls and burners

Appliance Quality: Appliance Door: With baked enamel finsih for long life and easy cleaning,

Warranty: 2 Year Parts - 1 Year Labor - 10 Years Heat Exchanger

* Use additional coil cabinet above 3.0 ton a/c or Heat Pump



Warranty 2 Year Parts / 1 Year Labor 10 Years Heat Exchanger Visit www.stylecrestinc.com for warranty rergistration

Revolv 80% RG1 Gas Furnace

Model No.	Description	Orfice Number		A/C Ready Tons	Dimensions H x W x D	Weight
		NG	LP			
RG1D56N3	56,000 Btu 80% Short	29	45	3	56" x 19-3/4" x 23-3/4"	152
RG1D70N3	70,000 Btu 80% Short	24	42	3	56" x 19-3/4" x 23-3/4"	153
RG1D77N3	77,000 Btu 80% Short	21	40	3	56" x 19-3/4" x 23-3/4"	149
RG1D90N3	90,000 Btu 80% Short	17	36	3	56" x 19-3/4" x 23-3/4"	151
RG1D56C3	56,000 Btu 80% Tall	29	45	3	76" x 19-3/4" x 23-3/4"	167
RG1D70C3	70,000 Btu 80% Tall	24	42	3	76" x 19-3/4" x 23-3/4"	168
RG1D77C3	77,000 Btu 80% Tall	21	40	3	76" x 19-3/4" x 23-3/4"	164
RG1D90C3	90,000 Btu 80% Tall	17	36	3	76" x 19-3/4" x 23-3/4"	166

Optional N4 Series Available in the short furnace with 4 ton blower

Revolv RO1 Series 80% AFUE Oil Furnaces



The RO1 oilf furnace is designed for all sizes of Mfd. and Modular Homes. These Units incorporate high efficiency, reliability, and low maintenance. RO1 oil furnaces are A/C ready with coil cavity box included.



Features and Bennefits

Sealed Combustion System: Vents exhaust gas directly outdoors and draws in 100% outside air for the burneer

Easy Open Pawl Latch: Secures the door firmly for transit, yet allows easy removal for access


Large EffectiveAir Filter: Room air is cleaner with this permanent washable filter

Appliance Quality Door: Protects against rusr and other corrosion. Baked enamel finish allows for easy cleaning

Fully Insulated Cabinet: Insures minimized heat loss and quiet operation

Reliable Burner: With uniform flame pattern extends life of heat exchanger

Warranty 2 Year Parts / 1 Year Labor 10 Years Heat Exchanger Visit www.stylecrestinc.com for warranty rergistration



Revolv RO1 80% Oil Furnaces

Model No.	Description	A/C Ready	Dimensions	Weight
		Tons	H x W x D	Lbs
RO1D66C3	66,000 Btu Oil 80% Tall	3.0	76" x 149-3/4" x 23-3/4"	167
RO1D86C3	86,000 Btu Oil 80% Tall	3.0	76" x 149-3/4" x 23-3/4"	174

Revolv RE9 Series Electric Furnaces

Downflow Series

Upflow Series



Features and Benefits

A/C and H.P Ready - for up thruoug 4 tons

Available in - Downflow and Upflow Configurations

Built in full sized coil cabinet - no need to add parts

Built in circuit breakers - For safety and reliability.

Nichrome heating elements - For long lasting efficient heat

Warranty - 2-Year Parts / 1 Year Labor

The RE Series electric furnace is designed for all sizes of Mfd. and Modular homes These units incorporate reliability and low maintenance. Units ma be installed free standing in a utility room or enclosed in an alcove or closet. RE Series furnaces are A/C ready with multipleblower combinations for cooling requirements

Revolv RE9 Series Electric Furnaces

Model	Description	Output Bruh	Dimensions W x H x D	Heating Elements No. (Total kw)
RE9D10C4	Electric 10 Kw downflow w/cabinet	35,000	20" x 60.63' x 24.5"	2 (10)
RE9D12C4	Electric 12Kw downflow w/cabinet	41,000	20" x 60.63' x 24.5"	2 (11.6)
RE9D15C4	Electric 15w downflow w/cabinet	53,000	20" x 60.63' x 24.5"	3 (15.0)
RE9D17C4	Electric 17Kw downflow w/cabinet	57,000	20" x 60.63' x 24.5"	3 (16.2)
RE9D20C4	Electric 20Kw downflow w/cabinet	70,000	20" x 60.63' x 24.5"	4 (20.0)
RE9D23C4	Electric 23Kw downflow w/cabinet	75,000	20" x 60.63' x 24.5"	4 (21.6)
RE9U10C4	Electric 10Kw upflow w/cabinet	35,000	20" x 60.63' x 24.5"	2 (10)
RE9U12C4	Electric 12Kw upflow w/cabinet	41,000	20" x 60.63' x 24.5"	2 (11.6)
RE9U15C4	Electric 15Kw upflow w/cabinet	53,000	20" x 60.63' x 24.5"	3 (15.0)
RE9U17C4	Electric 17Kw upflow w/cabinet	57,000	20" x 60.63' x 24.5"	3 (16.2)
RE9U20C4	Electric 20Kw upflow w/cabinet	70,000	20" x 60.63' x 24.5"	4 (20.0)
RE9U23C4	Electric 23Kw upflow w/cabinet	75,000	20" x 60.63' x 24.5"	4 (21.6)



Nordyne Electric Furnace Accessories

Part Number	Description	For Use With
N902993	Blower 2 – 4 Ton A/C	E3E Models
13902985	Blower 5 Ton A/C	E3E Models
N902989	Top Grill & Frame White (20" x 27")	E3E Models
N901082	Heat Only Thermostat	All Furnace Models
N901987	Duct Connector 11" x 13.25" x .88"	E3E Models
N901990A	Duct Connector 11" x 13.25" x 6.25"	E3E Models
N901988A	Duct Connector 11" x 13.25" x 2"	E3E Models
N901083	Automatic Damper for A/C or H.P. Pkg. Unit	E2/E3 Models
N913874	4-Pole single Circuit 1 Phase Adapter Kit	E2/E3 Models
N902991	E2 Insulation Kit	E3 Models
N903091	Relay Kit 2-Wire	E3 Models
N902987	Relay Kit 4 – 7 Wire	E3 Models
N914539	C 3 Conversion Kit (24-47)	E2/E3 Models
N902992	Upflow Stand	
N917763	Filter F/24-47 Coil 2/Pkg.	

Nordyne Gas Furnace Accessories

Part Number	Description	For Use With
13911030	Blower 2 – 4 Ton A/C	MG Series Gas Furnaces
N903992	Heat/Cool Thermostat	MG Series Gas Furnaces
13901998	Blower Assembly 2 – 3.5 Ton	MGHA-02 MMHA MBHA
N901995	A/C Relay	MGHA-02 MMHA MBHA
13901999	Blower Assembly 4 Ton	MGHA-02 MMHA MBHA
13902809	Blower Assembly 2 – 3.5 Ton	MGHA-05 Series
13902810	Blower Assembly 4.0 ton	MGHA-05 Series
N902898A	A/C Relay 2 – 5 Ton	MGHA-05 / M1 Series
13903412	Blower Assembly 2 – 3 Ton	M1 Series
13903413	Blower Assembly 2 – 4 Ton	M1 Series
13903890	Blower Assembly 2 – 5 Ton	M1 Series
N903773A	Relay 2 – 3 Ton	M1GH Series

Part #	Mfg.#	Model #	Design	Flashing Dimensions	Flue Pipe Dia	Pitch	Used with
M91523	903658	FAW1523-0A	Flat	15" min. – 23" max.	5″		All
M92135	903659	FAW2135-0A	Flat	21" min. – 35" max.	5″		Miller
M92747	903660	FAW2747-0A	Flat	27" min. – 47" max.	5″		willer
M92135S	903662	FAW2135-2A	Slope	21" min. – 35" max.	5″	2.5/12	Intertherm
M92747S	903663	SAW2747-2A	Slope	27" min. – 47" max.	5″	2.5/12	M1 Series
M93563S	903664	SAW3563-4A	Slope	35" min 63" max	5″	2.5/12	WHI Series
M95195S	903666A	SAW5195-4A	Slope	51" min. – 95" max.	5″	4.0/12	Furnaces
M902521	902521			Ceiling Ring			

Nordyne Components for Specific Applications

These Charts will show what you will need for specific models when installing a/c or heat pumps on older Nordyne Gas and Electric furnaces

M1GH * 2 Ton				
Part#`	Mfg. #	Description		
M902898A	902898A	Relay		

MILLER

M1GH * 2 - 3 Ton					
Part# Mfg. # Description					
13903412	903412	Blower			
M903773A	903773A	Relay			

M1GH * 2 - 4 Ton					
Part# Mfg. # Description					
13903413	903413	Blower			
M902898A	902898A	Relay			

M1GH * 2 - 5 Ton					
Part# Mfg. # Description					
13903890	903890	Blower			
M902898A	902898A	Relay			

MGH Series					
Part#	Mfg. #	Description			
13911030	Blower				
M903992	903992	H & C T-Stat			

2.0-3.5 Ton MGHA-02 / MMHA / MBHA / MSHA				
Part#	Mfg. #	Description		
13901998	901998	Blower		
M901995	901995	Relay		

4.0 Ton MGHA-02 / MMHA / MBHA / MSHA		
Part#	Mfg. #	Description
13901999	901999	Blower
M901995	901995	Relay

2.5 - 3.5 Ton MGHA-05 Series		
Part#	Mfg. #	Description
13902809	902809	Blower
M903992	903992	H&C T-Stat
4.0 Ton Models MGHA-05		
13902810	902810	Blower

M1GH * 2 Ton		
Part#`	Mfg. #	Description
M902898A	902898A	Relay

M1GH * 2 - 3 Ton		
Part#	Mfg. #	Description
13903412	903412	Blower
M903773A	903773A	Relay

M1GH * 2 - 4 Ton		
Part#	Mfg. #	Description
13903413	903413	Blower
M902898A	902898A	Relay

M1GH * 2 - 5 Ton		
Part#	Mfg. #	Description
13903890	903890	Blower
M902898A	902898A	Relay

MGH Series		
Part#	Mfg. #	Description
13911030	911030	Blower
M903992	903992	H & C T-Stat

2.0-3.5 Ton MGHA-02 / MMHA / MBHA / MSHA		
Part#	Mfg. #	Description
13901998	901998	Blower
M901995	901995	Relay

4.0 Ton MGHA-02 / MMHA / MBHA / MSHA		
Part#	Mfg. #	Description
13901999	901999	Blower
M901995	901995	Relay

2.5 - 3.5 Ton MGHA-05 Series		
Part#	Mfg. #	Description
13902809	902809	Blower
M903992	903992	H&C T-Stat
4.0 Ton Models MGHA-05		
13902810	902810	Blower





 11410
 4" x 10" Brown Register


 11410W
 4" x 10" White Register

 11412
 4" x 12" Brown Register

 11412W
 4" x 12" White Register

Backfllow Damper

1379006771 Package A/C Backflow Damper for use with Gas /Oil Furn.



Coupler & Adapter 11921 18"T-Couple Kit 119224 24"T-Couple Kit 11923 30"T-Couple Kit



11418 18" White Baseboard Register









S16709206 Hard Start Rt Economy S16709206 Hard Start 2.5 Ton S16708906 Hard Start 3. - 4. Ton




Blade Fuses

S1F003 3 amp purple 5/pk. S1F005 5 amp Tan 5/pk.

If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You

68

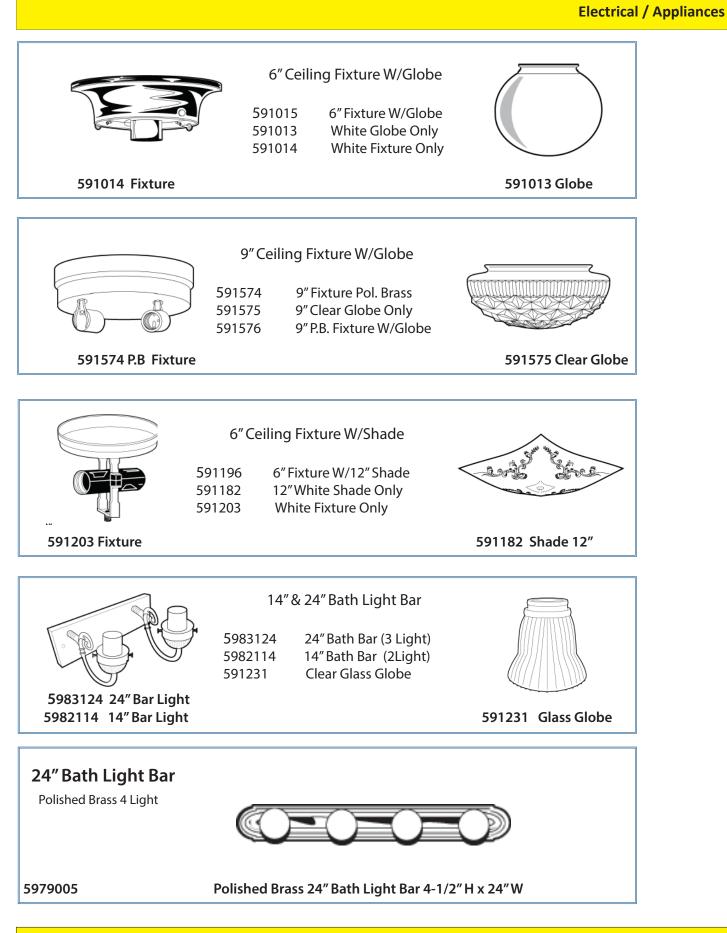

Electrical / Appliances



Electrical / Appliances



Electrical / Appliances



If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You

72





General Supply

General **S**upply Stocks a Somplete Line of Ventline Range Hoods, Exhaust Fans, Roof Vents, and Sidewall Fans. In Addition, We Carry a Complete Line of Replacement Parts. If You Don't See What You Are Looking For, Call us Today and We Will Help You Find It!

Fan Blade 6"	Universal Motor	Silver Painted Grill	Lens Cover
S.			
59312 Fan Blade 6"	59361 Universal Motor	59564 Silver Painted Grill	59VC013300 Lens Cover Bath Exhaust Fan
Plastic Vent Cap	Galv. Metal Vent Cap	Roof Cap & Flange	Metal Filters 8" Ventline
522049 Plastic Vent Cap 1-1/2" Dia.	522084 Metal Vent Cap For 1-1/4" to 2-1/2"	592011 Complete Assy. for Vertical Outlet Fans 12" Angle	591070 8″ Metal Filter
Exhaust Vent	Rocker Switch Ventline Range Hood	Roof Cap Flat Flange	Draft Cap 5"
597000V Exhaust Vent			
Lap Siding 59V2111 Outside Vent Cap With Damper	591181600 Rocker Switch For Ventline Hood	592012 Roof Cap Flat Flange 5" Dia. Attic Vent	522095 5" Draft Cap For Heat Stack



Panasonic

Whisper Wall Fan 70 CFM 1.1 Sone Designed specifically for through-the-wall mounting to provide ventilation in rooms where a ceiling mount is not possible

Part# 63WQ1 Whisper wall fan includes exterior hood with a backdraft damper. FV-WCPT1-W switch recommended

Whisper Control w/ fan -light switch and Tmer Delay



Whisper Value Universal HSG. Can 4/PK. Panasonic whisper value 80 CFM Contractor pack of 4 includes motor & grill assembly includes FV-08VS3 & FV-08VSB3

Part# 63510VSA3 Sold in packs of 4 priced individually.

Whisper Value Universal HSG. Can With Light 4/PK. Panasonic whisper value 80 CFM Contractor pack of 4 includes motor & grill assembly includes FV-08VSL3 & FV-08VSLB3

Part# 63810VSLA3 Sold in packs of 4 priced individually.





Whisper Select With Multi-Speed Moto Pick a speed exhaust fan with plug and play add on features. Motion, Nite light, and Condensation senors can easily be added to meet your needs

Part# 6311VS1 Whipsper Select Pick a Flow

Whisper Select Pick a Flow with Light

Pick a speed exhaust fan with light. This fans accepts plug and play modules that offer you the option to add Motion, Nite Light, or Condensation modules. Easy to Install

Part# 63VKSL1 Whipsper Select Pick a Flow with Light

Whisper Warm Fan, Heater With Light. Panasonic whisper warm 110 cfm ceiling mounted fan/light/ night light combination. Use with (FV-WCD01-W/A) Switch

Part# 6311VHL2 Use with FV-WCSW41-W Whisper 4 function control.

Plug and Play Modules for the Whisper Select Models 6311VS1 and 6311VSL1














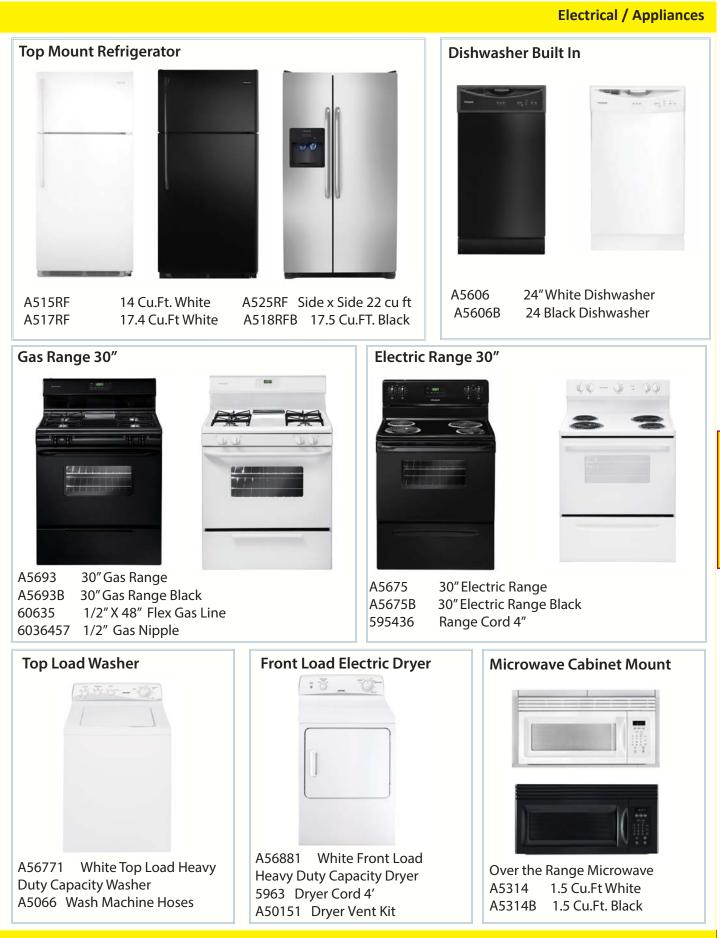

Electrical / Appliances

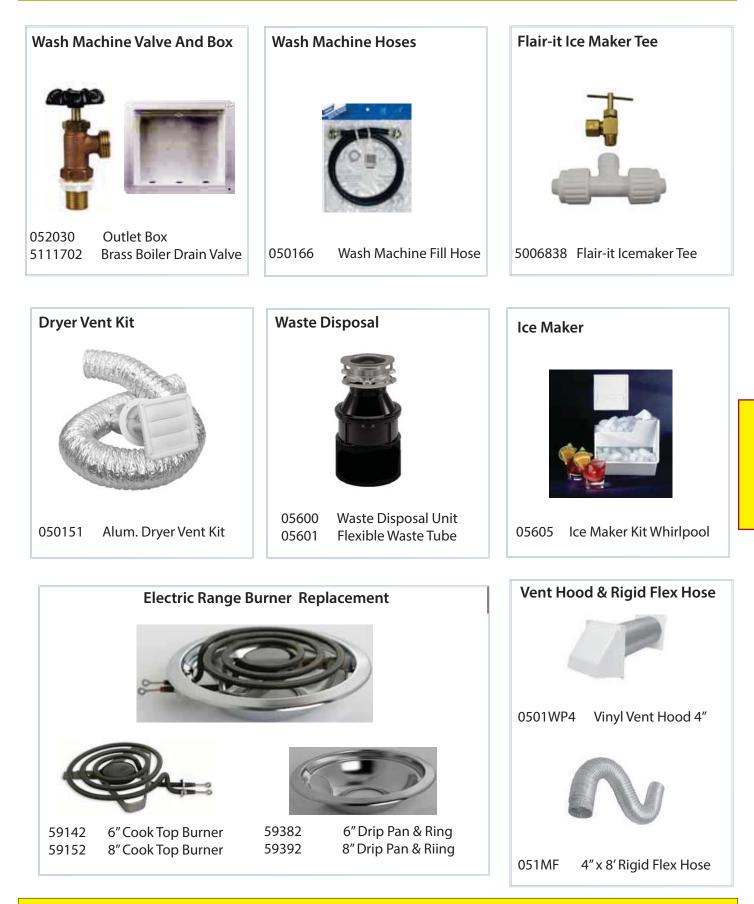

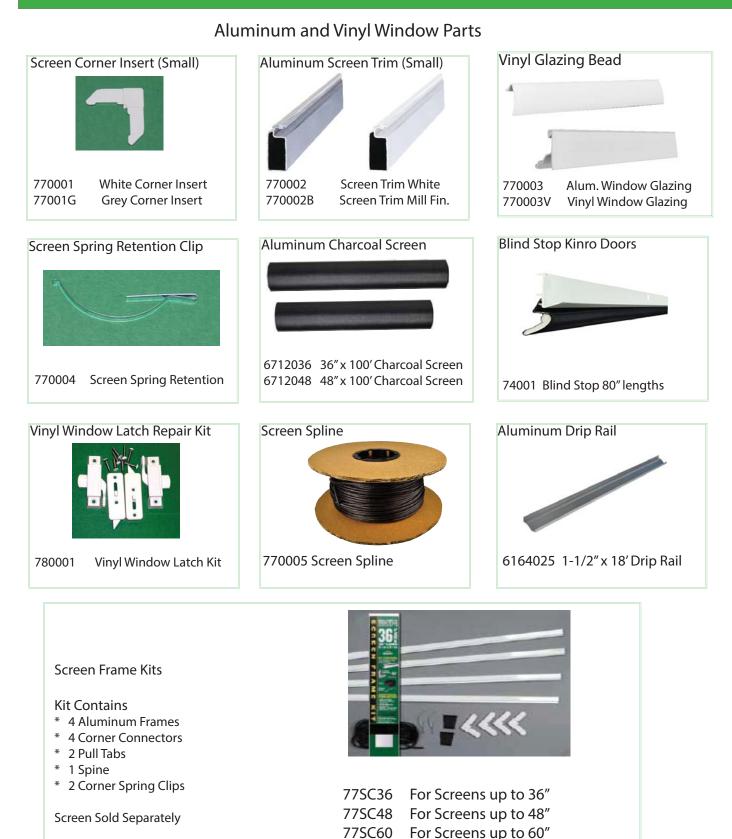


5700 Series Self Storing Storm Windows

Features

- Large flush mounting flange for easy installation.
- Removable upper and lower sash are marine glazed for superior weather resistance
- Latch strike allows for multiple opening positions to improve ventilation
- Quality pile weather strip for maximum weather resistance
- White painted aluminum framework standard.



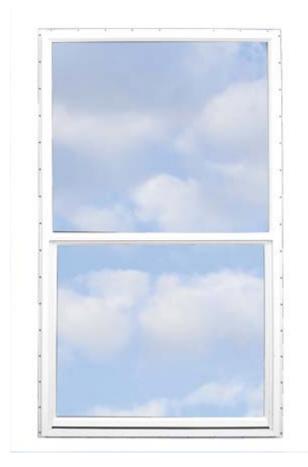

1800 Series Aluminum Windows

Features

- Large flush mounting flange for easy installation.
- Interlocking meeting rails provide additional structural performance
- Quality pile weather stripping for maximum weather resistance
- Single strength aluminum pane windows with optional frosted or tinted glass
- soft vinyl bulb gasket for additional weather seal
- Sloped sill and large built-in weep holes for superior drainage
- Jambs notched for multiple opening positions with spring-loaded latches.
- Nylon glidesenable easy window sash operation







Part No	Aluminum Vertical Slider Size (W x H)	Part No.	White Self Storing Storm Size (W x H)
771421	14-1/4 x 21 V.S.	7714215	14-1/4 x 21 S.S.S
771427	14-1/4 x 27 V.S.	7714275	14-1/4 x 27 S.S.S.
771436	14-1/4 x 36 V.S	771436S	14-1/4 x 36 S.S.S.
771440	14-1/4 x 39-5/8 V.S.	771440S	14-1/4 x 39-5/8 S.S.S.
771453	14-1/4 x 53-5/8 V.S	771453S	14-1/4 x 53-5/8 S.S.S.
771821	18-1/4 x 21 V.S.	7718215	18-1/4 x 21 S.S.S.
771827	18-1/4 x 27 V.S.	7718275	18-1/4 x 27 S.S.S.
772427	24-1/4 x 27 V.S.	7724275	24-1/4 x 27 S.S.S.
772440	24-1/4 x 39-5/8 V.S.	772440S	24-1/4 x 39-5/8 S.S.S.
773021	30-1/4 x 21 V.S.	773021S	30-1/4 x 21 S.S.S.
773027	30-1/4 x 27 V.S.	773027S	30-1/4 x 27 S.S.S.
773030	30-1/4 x 30 V.S.	773030S	30-1/4 x 30 S.S.S.
773036	30-1/4 x 35-5/8 V.S	773036S	30-1/4 x 35-5/8 S.S.S.
773040	30-1/4 x 39-5/8 V.S	773040	30-1/4 x 39-5/8 S.S.S.
773053	30-1/4 x 53-5/8 V.S.	773053S	30-1/4 x 53-5/8 S.S.S.
773060	30-1/4 x 60 V.S.	773060S	30-1/4 x 60 S.S.S.
773627	36-1/4 x 27 V.S.	7736275	36-1/4 x 27 S.S.S.
773630	36-1/4 x 30 V.S.	773630S	36-1/4 x 30 S.S.S.
773640	36-1/4 x 39-5/8 V.S.	773640S	36-1/4 x 39-5/8 S.S.S.
773653	36-1/4 x 53-5/8 V.S.	773653S	36-1/4 x 53-5/8 S.S.S.
773660	36-1/4 x 60 V.S.	773660S	36-1/4 x 60 S.S.S.
774027	40-1/4 x 27 V.S.	7740275	40-1/4 x 27 S.S.S.
774036	40-1/4 x 35-3/4 V.S.	774036S	40-1/4 x 35-3/4 S.S.S.
774040	40-1/4 x 39-5/8 V.S.	774040S	40-1/4 x 39-5/8 S.S.S.
774053	40-1/4 x 53-5/8 V.S.	774053S	40-1/4 x 53-5/8 S.S.S.
774627	46-1/4 x 27 V.S.	774627S	46-1/4 x 27 S.S.S.
774630	46-1/4 x 30 V.S.	774630S	46-1/4 x 30 S.S.S.
774636	46-1/4 x 35.3/4 V.S.	774636S	46-1/4 x 35.3/4 S.S.S.
774640	46-1/4 x 39-5/8 V.S.	774640S	46-1/4 x 39-5/8 S.S.S.
774653	46-1/4 x 53-5/8 V.S.	774653S	46-1/4 x 53-5/8 S.S.S.

1800 Series Single Pane Aluminum Windows

1900 Series Single Horizontal Pane Aluminum Windows

Part No.	Horizontal Slider Window Size (W x H)	Part No.	Horz. Self Storing Storms Size (W x H)
773014H	30-1/4 x 14 H.S	773014HS	30-1/4 x H.S.S.S
773027H	30-1/4 x 24 H.S,	773027HS	30-1/4 x 24 H.S.S.S.
773040H	30-1/4 X 39-5/8 H.S.	773040HS	30-1/4 X 39-5/8 H.S.S.
774627H	46-1/4 X 27 H.S	774627HS	46-1/4 X 27 H.S.S.S.
774640H	46-1/4 X 39-5/8 H.S.	774641HS	46-1/4 X 39-5/8 H.S.S.S.

Series 9750 Vinyl Single Hung Window

Features

- Vinyls construction provides high thermal performance
- Frame and sash corners are welded for added strength and water tight corners
- Deep pocket sill for added window strength and weather resistance
- Window sash can be removed for easy cleaning on any level of the home
- Reinforcement bars in the meeting rails provide added strength
- Positive integral lock at the meeting rail for increased home security and weather resistnace
- Dual weather seal to reduce drafts and enhance energy efficiency
- Nominal 3/4" insulating glass provides superior thermal performance.
- Standard Manufactured Home sizes make it easy to replace older aluminum windows





Two spring loaded thumb latches for operation of removable lower sash



Marine glazed fixed panel and sash for superior weatherproofing



Frame and sash corners are welded for added strength and water tight corners



Window sash can be removed for easy cleaning on any level of the home.

General Supply Inc. 317.856.4300 Toll Free 800.479.2754 www.generalsupplyinc.com

Series 9750 Vinyl Single Hung Window



Part No.	Description	Size	Color
781421	Vinyl Single Hung	14" x 21"	White
781427	Vinyl Single Hung	14" x 27"	White
781440	Vinyl Single Hung	14" x 40"	White
782427	Vinyl Single Hung	24" x 27"	White
782440	Vinyl Single Hung	24" x 40"	White
783027	Vinyl Single Hung	30" x 27"	White
783040	Vinyl Single Hung	30" x 40"	White
783054	Vinyl Single Hung	30" x 54"	White
783627	Vinyl Single Hung	36″ X 27″	White
783640	Vinyl Single Hung	36" X 40"	White
783654	Vinyl Single Hung	36″ X 54″	White
784027	Vinyl Single Hung	40″ X 27″	White
784054	Vinyl Single Hung	40″ X 54″	White
784627	Vinyl Single Hung	46″ X 27″	White
784640	Vinyl Single Hung	46" X 40"	White
784654	Vinyl Single Hung	46" X 54"	White
Ontional White Colonial	Grids are Available Call for	Details	

Optional White Colonial Grids are Available. Call for Details

Series 9750 Vinyl Single Hung Energy Star Window



Part No.	Description	Size	Color
781427E	Vinyl Single Hung	14" x 27"	White
781440E	Vinyl Single Hung	14" x 40"	White
782440E	Vinyl Single Hung	24" x 40"	White
783027E	Vinyl Single Hung	30" x 27"	White
783040E	Vinyl Single Hung	30" x 40"	White
783054E	Vinyl Single Hung	30" x 54"	White
783627E	Vinyl Single Hung	36" X 27"	White
783640E	Vinyl Single Hung	36" X 40"	White
783654E	Vinyl Single Hung	36" X 54"	White
784627E	Vinyl Single Hung	46" X 27"	White
784640E	Vinyl Single Hung	46" X 40"	White
784654E	Vinyl Single Hung	46" X 54"	White

Energy Star Windows May be Eligible for Federal Tax Credits. Be Sure to Ask for Details

Windows and Doors

Series 4000 Double French Door

Features

- Attractive Replacement for sliding glass door
- Vinyl steel skin door with a folded lip on all four sides to prevent air, water, and light filtration
- Two 15-lite french windows with tempered glass
- Heavy-duty adjustable striker plate
- Heavy aluminum extruded frames
- Polyurethane foam filled door cores provide energy efficiency.

Outswinging Double French doors

Part No	Description	Size	Color
767276R	Double French Doors 15-lite	72" x 76" R/H	White
767276L	Double French Doors 15-lite	72" x 76" L/H	White

Series 1600 Vinyl Patio Door

Features

- Heat fusion welded frame and moving panel provides superior structural strength and prevents potential leakage at the corners.
- Staggered internal weep system allows minimum dust infiltration. Snap-in weep covers are standard
- Exterior glazing design improves resistance to wind and water
- 3/4" Sealed insulating glass (tempered) with "intercept:" spacer and optional Low-E provides optimum thermal performance.
- High quality fin seal weatherstrip around moving panel perimeter insures a positive seal against the wind and water.
- Color coordinated attractive mortise type keyed lock mounted on steel reinforced lock jamb for strength sturdiness that provides add security.
- Anti-theft design feature requires moving panel to be in fully open position before panel can be removed for added security.







Windows and Doors

Series 7500 Vinyl Patio Door

- Standard frame for use with all wall/siding types.
 Lap frame eliminates the need for additional siding trim pieces
- 5/8" sealed insulated glass (tempered) with optional Low-E provides optimum performance
- Heavy duty fin seal weatherstrip to reduce air, water, dust and noise infiltration
- fully adjustable factory lubricated steel tandem rollers mounted with ball bearing insures trouble free operation.



1600 Series Vinyl Patio Door

Part No.	Call Width	Net Frame Size (inches)	Call Height	Net Frame Size (inches)	Recommended Rough Opening W x H (inches)
766064	6'-0"	71-1/2"	6'4"	75-1/2"	72" x 76'
766068	8'-6"	95-1/2"	6'8"	79-1/2"	96" x 80"
765064	5.0′	59-1/2"	6'4"	76-1/2"	60" x 76-1/2"

XO From outside looking in, left panel slides, right panel is stationary

OX From outside looking in, right panel slides, left panel is stationary

• Easy to reverse from OX to XO or XO to OX. Reversing must be done prior to installation

Series 7500 Aluminum Patio Door

Part No	Call Width	Net Frame Size (inches)	Call Height	Net Frame Size (inches	Recommended Rough Opening WxH (inches)
765060A	5'-0"	58-15/16"	6'-0"	72-1/2"	59-1/4" x 72-3/4"
766076A	6'0"	70-15/16"	6'-4"	76-1/2"	71-1/4" x 76-3/4"
766068A	6'-0"	70-15/16"	6'-8"	80-1/2″	71-1/4" x 80-3/4"

XO From outside looking in, left panel slides, right panel is stationary

OX From outside looking in, right panel slides, left panel is stationary

• Easy to reverse from OX to XO or XO to OX. Reversing must be done prior to installation

• Optional 15/15 grids

Philips Patio Door Lock



701875 Philips Patio Door replacement lock set

Kinro Patio Door Lock



701876 Kinro Patio Door replacement Lock set



76SCNE Replacement patio door screens

Series 5210 House-Type Combination Inswing Door

Features

- Left or Right hand swing
- 10" x 10" Diamond window w/clear tempered glass (other window styles available)
- White stucco fiberglass both sides
- 1-3/8" Core with steel and foam (no wood)
- Dual Seal System to resist water air and light filtration
- Aluminum threshold with thermal brake barrier
- Silver lock and butt hinges (prep for deadbolts)
- 1-1/4" Thick self storing storm door with lip
- Plywood jambs available in 4" 6" and 6-9/16"
- Storm Door Hardware included.
- Lock set sold separately



Shown with optional 4 x 24 window

5210 Series	5210 Series Combo Doors						
Part No	Description House-Type Doors	Rough Opening Size (WxH)	Part No	Description House-Type Doors	Rough Opening Size (WxH)		
743276L	L/H Hinge 4" Jamb	32" x 76"	7432766L	L/H Hinge 6" Jamb	32″ x 76″		
743276R	R/H Hinge 4" Jamb	32" x 76"	7432766R	R/H Hinge 6" Jamb	32" x 76"		
743476L	L/H Hinge 4" Jamb	34" x 76"	7434766L	L/H Hinge 6" Jamb	34" X 76"		
743476R	R/H Hinge 4" Jamb	34" x 76"	7434766R	R/H Hinge 6" Jamb	34" x 76"		
743478L	L/H Hinge 4" Jamb	34" x 78"	7434786L	L/H Hinge 6" Jamb	34" x 78"		
743478R	R/H Hinge 4" Jamb	34" x 78"	7434786R	R/H Hinge 6" Jamb	34" x 78"		
743480L	L/H Hinge 4" Jamb	34" x 80"	7434806L	L/H Hinge 6" Jamb	34" x 80"		
743480R	R/H Hinge 4" Jamb	34" x 80"	7434806R	R/H Hinge 6" Jamb	34" x 80"		
743680L	L/H Hinge 4" Jamb	36" X 80"	7436806L	L/H Hinge 6" Jamb	36" x 80"		
743680R	R/H Hinge 4" Jamb	36" x 80"	7436806R	R/H Hinge 6" Jamb	36" x 80"		
743876L	L/H Hinge 4" Jamb	38" x 76"	7438766L	L/H Hinge 6" Jamb	36" x 80"		
743876R	R/H Hinge 4" Jamb	38" x 76"	7438766R	R/H Hinge 6" Jamb	38" x 76"		
743880L	L/H Hinge 4" Jamb	38" x 80"	7438806L	L/H Hinge 6" Jamb	38" X 80"		
743880R	R/H Hinge 4" Jamb	38" x 80"	7438806R	R/H Hinge 6" Jamb	38" x 80"		

• 4000 Series House-type doors come standard white on white with a 10 x 10 diamond window

1-1/4" Thick 6400 series white storm door with hardware is included

Series 5140 Mobile Home Single Outswing Door

Features

- Left or Right hand swing
- White stucco fiberglass both sides
- 1-3/8" Core with steel and foam (no wood)
- Steel style cambered door
- Door prepped for deadbolt assembly
- Full perimeter compression gasket seal
- Welded Aluminum Frame
- Stainless steel lockset sold separately

Size		art No.	Door	Window	
(W x H)	*Open L/H Opening	ing Direction R/H Opening	Descripiton	Туре	
20 x 72	723072L		Outquing Single Deer	Plank	
30 x 72	723072L 723072LD	723072R 723072RD	Outswing Single Door Outswing Single Door	Blank 10" x 10" Diamone	
				14" x 27" Slider	
32 x 72	723072LS	723072RS	Outswing Single Door	Blank	
52 X / Z	723272L	723272R	Outswing Single Door	10" x 10" Diamone	
	723272LD	723272RD	Outswing Single Door		
2274	723272LS	723272RS	Outswing Single Door	14" x 27" Slider	
32 x 74	723272L	723274R	Outswing Single Door	Blank	
	723274LD	723274RD	Outswing Single Door	10" x 10" Diamon	
	723274LS	723274RS	Outswing Single Door	14" x 27" Slider	
32 x 76	723276L	723276R	Outswing Single Door	Blank	
	723276LD	723276RD	Outswing Single Door	10" x 10" Diamon	
	723276LS	723276RS	Outswing Single Door	14" x 27" Slider	
	723276LC	723276RC	Outswing Single Door	9-Lite Window	
32 x 78	723278L	723278R	Outswing Single Door	Blank	
	723278LD	723278RD	Outswing Single Door	10" x 10" Diamon	
	723278LS	723278RS	Outswing Single Door	14" x 27" Slider	
34 x 76	723476L	723476R	Outswing Single Door	Blank	
	723476LD	723476RD	Outswing Single Door	10" x 10" Diamon	
	723476LS	723476RS	Outswing Single Door	14" x 27" Slider	
	723476LC	723476RC	Outswing Single Door	9-Lite Window	
34 x 78	723478L	723478R	Outswing Single Door	Blank	
	723478LD	723478RD	Outswing Single Door	10" x 10" Diamon	
	723478LS	723478RS	Outswing Single Door	14" x 27" Slider	
34 x 80	723480L	723480R	Outswing Single Door	Blank	
	723480LD	723480RD	Outswing Single Door	10" x 10" Diamon	
	723480LS	723480RS	Outswing Single Door	14" x 27" Slider	
	723480LC	723480RC	Outswing Single Door	9-Lite Window	
36 x 80	723680L	723680R	Outswing Single Door	Blank	
	723680LD	723680RD	Outswing Single Door	10" x 10" Diamon	
	723680LS	723680RS	Outswing Single Door	14" x 27" Slider	
	723680LC	723680RC	Outswing Single Door	9-Lite Window	





10 x 10 Diamond



Slider w/screen

* Opening direction is determined by the location of the door hinge while facing the door from the outside.

Doors and Windows

3200 SERIES | 6-PANEL/FLUSH OUTSWING DOOR

The sleek design of the 3200 Series 6-Panel or flush outswing steel door is a great look for manufactured homes or residential construction. Its heavy duty steel panel construction polystyrene insulation offers a more secure door with a superior thermal barrier

FEATURES

Door Panels: Vinyl clad steel (6-panel or flush design)

Core Insulation: Polystyrene foam

Door Thickness: 1-3/8"

Mounting Frame: White painted galvanized steel (flush mount)

Seal: Full perimeter compression gaskets and vinyl seals

Hinges: 4 Extruded hinges with bushings

Lockset: Fully prepped (pre-drilled) for lock and Deadbolt (lock set sold separately)

Size	Blank	9-Lite	Sunburst
30 x 72	723072LSB		
	723072RSB		
30 x 74	723074LSB		
	723074RSB		
30 x 76	723076LSB		
	723076RSB		
32 x 72	723272LSB	723272LS9	723272LSS
	723272RSB	723272RS9	723272RSS
32 x 74	723274LSB	723274LS9	723274LSS
	723274RSB	723274RS9	723274RSS
32 x 76	723276LSB	723276LS9	723276LSS
	723276RSB	723276RS9	723276RSS
32 x 78	723278LSB		
	723278RSB		
34 x 76	723476LSB	723476LS9	723476LSS
	723476RSB	723476RS9	723476RSS
34 x 78	723478LSB	723478LS9	723478LSS
	723478RSB	723478RS9	723478RSS
34 x 80	723480LSB	723480LS9	723480LSS
	723480RSB	723480RS9	723480RSS
36 x 80	723480LSB	723480LS9I	723480LSS
	723480RSB	723480RS9	723480RSS









If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You

Windows and Doors



Series 7660 6-Panel Steel Combination Inswing Door

Features

- Left or Right hand swing
- 6-Panel vinyl clad steel door with lock & deadbolt, (Knocker & Viewer Included)
- 1-3/4" Insulated primary core entry door
- 1-3/8" Core with steel and foam (no wood)
- Silver butt hinge system
- Dual seal system to resist water, air, & light infiltration
- Aluminum threshold with thermal barrier
- 1-1/4" Thick painted self storing storm door
- Plywood jambs available in 4", 6" and 6-9/16"
- Storm Door Hardware included.
- Option window treatments are available



4500 Series 6-Panel Steel Doors					
Part No	Description House-Type Doors	Rough Opening Size (WxH)	Part No	Description House-Type Doors	Rough Opening Size (WxH)
753276L	L/H Hinge 4" Jamb	32" x 76"	7532766L	L/H Hinge 6" Jamb	32" x 76"
753276R	R/H Hinge 4" Jamb	32" x 76"	7532766R	R/H Hinge 6" Jamb	32" x 76"
753476L	L/H Hinge 4" Jamb	34" x 76"	7534766L	L/H Hinge 6" Jamb	34" X 76"
753476R	R/H Hinge 4" Jamb	34" x 76"	7534766R	R/H Hinge 6" Jamb	34" x 76"
753478L	L/H Hinge 4" Jamb	34" x 78"	7534786L	L/H Hinge 6" Jamb	34" x 78"
753478R	R/H Hinge 4" Jamb	34" x 78"	7534786R	R/H Hinge 6" Jamb	34" x 78"
753480L	L/H Hinge 4" Jamb	34" x 80"	7534806L	L/H Hinge 6" Jamb	34" x 80"
753480R	R/H Hinge 4" Jamb	34" x 80"	7534806R	R/H Hinge 6" Jamb	34" x 80"
753680L	L/H Hinge 4" Jamb	36" X 80"	7536806L	L/H Hinge 6" Jamb	36" x 80"
753680R	R/H Hinge 4" Jamb	36" x 80"	7536806R	R/H Hinge 6" Jamb	36" x 80"
753876L	L/H Hinge 4" Jamb	38" x 76"	7538766L	L/H Hinge 6" Jamb	36" x 80"
753876R	R/H Hinge 4" Jamb	38" x 76"	7538766R	R/H Hinge 6" Jamb	38" x 76"
753880L	L/H Hinge 4" Jamb	38" x 80"	7538806L	L/H Hinge 6" Jamb	38" X 80"
753880R	R/H Hinge 4" Jamb	38" x 80"	7538806R	R/H Hinge 6" Jamb	38" x 80"

4500 Series 6-panel steel doors come with lock, deadbolt, knocker, and viewer (brass or silver)

1-1/4" Thick 6400 series white storm door with hardware is included

Available white finish standard (optional sand finish can be special ordered0

• Optional window designs are available be sure to ask for more details

Windows and Doors



Series 7660 6-Panel Steel **Combination Inswing Door With Designer Glass**

Features

- Left or Right hand swing
- 6-Panel vinyl clad steel door . (Knocker & Viewer Included)
- 1-3/4" Insulated primary core entry door
- 1-3/8" Core with steel and foam (no wood)
- Silver butt hinge system
- Dual seal system to resist water, air, & light infiltration
- Aluminum threshold with thermal barrier
- 1-1/4" Thick painted self storing storm door
- Plywood jambs available in 4", 6" and 6-9/16"
- Storm Door Hardware included.
- Option window treatments are available
- Prepped for Lock and Deadbolt (lock sold separtely)





Nine Lite








Dynasty Sunburst







Series 5945 Storm Doors For Manufactured Homes


6400 Series Storm Doors are Manufactured from maintenance free aluminum with a baked on enamel finish that never requires painting. These doors are 1-1/4" thick and come standard with tempered glass. All hardware is included. Optional full view storm doors are available. These storm doors are available in both white or beige.

General Supply Inc. 317.856.4300 Toll Free 800.479.2754 www.generalsupplyinc.com

7660 6-Panel Steel Designer Series

Part No.	Description	Hinge Side	Part No.	Description	Hinge Side
	Six Par		th Sunburst Windo	W	Side
753476LSB	34 x 76 6-Pnl 4" Jamb	L/H	7534766LSB	34 x 76 6-Pnl 6" Jamb	L/H
753476RSB	34 x 76 6-Pnl 4" Jamb	R/H	7534766RSB	34 x 76 6-Pnl 6" Jamb	R/H
753480LSB	34 x 80 6-Pnl 4" Jamb	L/H	7534806LSB	34 x 80 6-Pnl 6" Jmab	L/H
753480RSB	34 x 80 6-Pnl 4" Jamb	R/H	7534806RSB	34 x 80 6-Pnl 6" Jamb	R/H
753880LSB	38 x 80 6-Pnl 4" Jamb	L/H	7538806LSB	38 x 80 6-Pnl 6" jamb	L/H
753880RSB	38 x 80 6-Pnl 4" Jamb	R/H	7538806RSB	38 x 80 6-Pnl 6" jamb	R/H
			ynasty Sunburst W		
753476LSBD	34 x 76 6-Pnl 4" Jamb	L/H	7534766LSBD	34 x 76 6-Pnl 6" Jamb	L/H
753476RSBD	34 x 76 6-Pnl 4" Jamb	R/H	7534766RSBD	34 x 76 6-Pnl 6" Jamb	R/H
753480LSBD	34 x 80 6-Pnl 4" Jamb	L/H	7534806LSBD	34 x 80 6-Pnl 6" Jmab	L/H
753480RSBD	34 x 80 6-Pnl 4" Jamb	R/H	7534806RSBD	34 x 80 6-Pnl 6" Jamb	R/H
753880LSBD	38 x 80 6-Pnl 4" Jamb	L/H	7538806LSBD	38 x 80 6-Pnl 6" jamb	L/H
753880RSBD	38 x 80 6-Pnl 4" Jamb	R/H	7538806RSBD	38 x 80 6-Pnl 6" jamb	R/H
	Six Panel St	eel With Dy	nasty Round Top W	Vindow	
753476LRT	34 x 76 6-Pnl 4" Jamb	L/H	7534766LRT	34 x 76 6-Pnl 6" Jamb	L/H
753476RRT	34 x 76 6-Pnl 4" Jamb	R/H	7534766RRT	34 x 76 6-Pnl 6" Jamb	R/H
753480LRT	34 x 80 6-Pnl 4" Jamb	L/H	7534806LRT	34 x 80 6-Pnl 6" Jmab	L/H
753480RRT	34 x 80 6-Pnl 4" Jamb	R/H	7534806RRT	34 x 80 6-Pnl 6" Jamb	R/H
753880LRT	38 x 80 6-Pnl 4" Jamb	L/H	7538806LRT	38 x 80 6-Pnl 6" jamb	L/H
753880RRT	38 x 80 6-Pnl 4" Jamb	R/H	7538806RRT	38 x 80 6-Pnl 6" jamb	R/H
	Six Panel	1	Oynasty Sqaure Wi i	ndow	
753476LSQ	34 x 76 6-Pnl 4" Jamb	L/H	7534766LSQ	34 x 76 6-Pnl 6" Jamb	L/H
753476RSQ	34 x 76 6-Pnl 4" Jamb	R/H	7534766RSQ	34 x 76 6-Pnl 6" Jamb	R/H
753480LSQ	34 x 80 6-Pnl 4" Jamb	L/H	7534806LSQ	34 x 80 6-Pnl 6" Jmab	L/H
753480RSQ	34 x 80 6-Pnl 4" Jamb	R/H	7534806RSQ	34 x 80 6-Pnl 6" Jamb	R/H
753880LSQ	38 x 80 6-Pnl 4" Jamb	L/H	7538806LSQ	38 x 80 6-Pnl 6" jamb	L/H
753880RSQ	38 x 80 6-Pnl 4" Jamb	R/H	7538806RSQ	38 x 80 6-Pnl 6" jamb	R/H
			Etched Oval Wind	1	
753476LEO	34 x 76 6-Pnl 4" Jamb	L/H	7534766LEO	34 x 76 6-Pnl 6" Jamb	L/H
753476REO	34 x 76 6-Pnl 4" Jamb	R/H	7534766REO	34 x 76 6-Pnl 6" Jamb	R/H
753480LEO	34 x 80 6-Pnl 4" Jamb	L/H	7534806LEO	34 x 80 6-Pnl 6" Jmab	L/H
753480REO	34 x 80 6-Pnl 4" Jamb	R/H	7534806REO	34 x 80 6-Pnl 6" Jamb	R/H
753880LEO	38 x 80 6-Pnl 4" Jamb	L/H	7538806LEO	38 x 80 6-Pnl 6" jamb	L/H
753880REO	38 x 80 6-Pnl 4" Jamb	R/H	7538806REO	38 x 80 6-Pnl 6" jamb	R/H
750476150			Dynasty Oval Wind	1	
753476LDO	34 x 76 6-Pnl 4" Jamb	L/H	7534766LDO	34 x 76 6-Pnl 6" Jamb	L/H
753476RDO	34 x 76 6-Pnl 4" Jamb	R/H	7534766RDO	34 x 76 6-Pnl 6" Jamb	R/H
753480LDO	34 x 80 6-Pnl 4" Jamb	L/H	7534806LDO	34 x 80 6-Pnl 6" Jmab	L/H
753480RDO	34 x 80 6-Pnl 4" Jamb	R/H	7534806RDO	34 x 80 6-Pnl 6" Jamb	R/H
753880LDO	38 x 80 6-Pnl 4" Jamb	L/H	7538806LDO	38 x 80 6-Pnl 6" jamb	L/H
753880RDO	38 x 80 6-Pnl 4" Jamb	R/H	7538806RDO	38 x 80 6-Pnl 6" jamb	R/H

Exterior Accessories

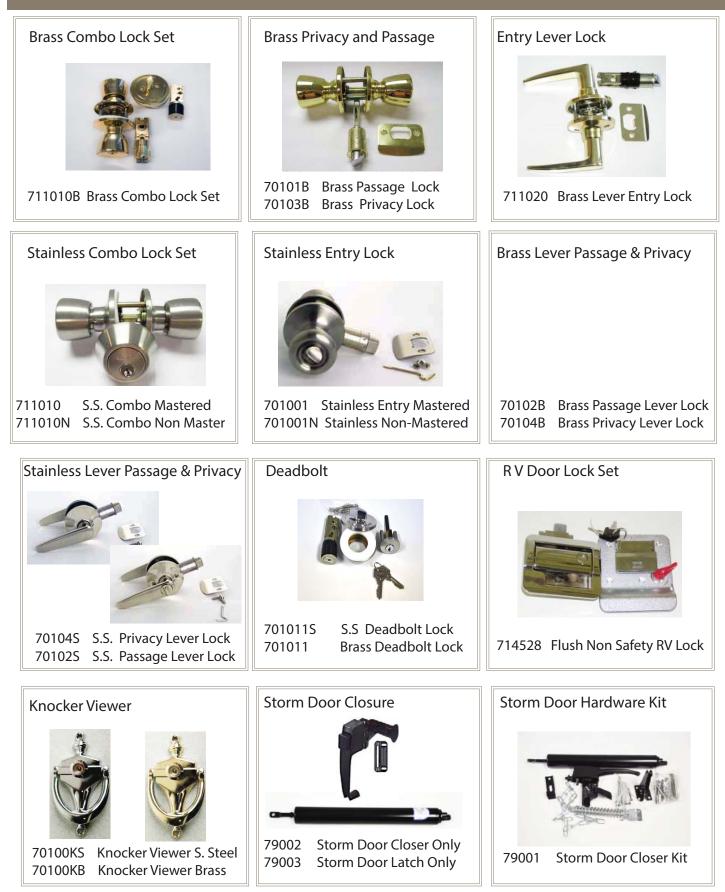

5050 Series R V Doors

5050 Radius Corner Series



Series 5050 Radius Corner RV Door

Frame Assembly

- Precision one-piece outer frame is delivered pre-squared and ready for installation.
- Extruded Hinges with stainless steel bushing and full length hinge pin provide longer service life and sturdy core to frame connection.
- Hinge system complies with DOT FMVSS 206 and CMVSS 206.
- Mill finish sloped threshold prevents wear in high traffic area.
- A variety of optional frame colors are available.

Core Assembly

- Interior surfaces are damage resistant fiberglass. Optional aluminum skin is available.
- Strong extruded aluminum core surround protects the core edge from damage.
- Precambered steel lock stile and adjustable strike plate ensure a positive seal.
- Optional knob/lever and safety locks are available.

Screen Door Assembly

- Extruded aluminum frame with reinforced corners.
- Large molded slide bubble glides easily and gives ready access to lock area.
- Screen door lever latch secures firmly to the primary door and frame

Series 5050 Square Corner RV Door

Frame Assembly

- Extruded hinges with stainless steel bushing and full-length hinge pin provide longer service life and sturdy core to frame connection.
- Hinge system complies with DOT FMVSS 206 and CMVSS 206.
- Built in drip cap requires less labor at installation and sloped threshold provides better drainage.
- A variety of optional frame colors are available.

Core Assembly

- Damage resistant fiberglass exterior and interior surfaces. Optional aluminum skin available.
- Strong extruded aluminum core surround protects the core edge from damage.
- Precambered steel lock stile and adjustable strike plate ensure a positive seal.
- Optional knob/lever and safety locks are available.

Screen Door Assembly

- Extruded aluminum frame with reinforced corners.
- Large molded slide bubble glides easily and gives ready access to lock area.
- Screen door lever latch secures firmly to the primary door and fram

Call Widths	24" 26" 28" 30" 32" 34" 3	36″
Call Heights	68" 70" 72" 74" 76" 78" 8	80″

Rough Opening Dimensions: Call Width = Rough Opening Dimension Call Height + 1/4" = Rough Opening Dimension Example 28" x 76" Call Size + 28" x 76-1/4" Formally Known as Philips Products R.V Doors



If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You

5050 Square Series



1-3/8" Interior Masonite Doors Flush or 6-Panel Molded



Standard Masonite[®] Veneer Flush Interior doors offer the visual beauty and style of more expensive natural wood doors. These hollow core doors are both paintable or stainable and install easily with non-mortise hinges.

The Masonite 6-Pnl Molded Interior

doors utilizes a composite wood construction that results in a more durable door that resist warping, shrinking and cracking better than a more expensive solid wood door. Easy to install with non-mortise hinge.

Interior Door Hinges



673252 Non-Mortise Brass Hinge



673253 Brass Butterfly Hinge 673253S Stainless Butterfly Hinge



Interior Doors			
Size	Flat Panel	*6-Panel	*6-Panel
	Valley Oak	Harvest Oak	White Finish
20 x 80	642080LT		
24 x 78	642478LT	6424786P	6424786PW
24 x 80	642480LT	6424806P	6024806PW
26 x 78	642678LT	6426786P	6426786PW
26 x 80	642880LT	6426806P	6426806PW
28 x 78	642878LT	6428786P	6428786PW
28 X 80	642880LT	6428806P	6428806PW
30 x 78	643078LT	6430786P	6430786PW
30 x 80	643080LT	6430806P	6430806PW
36 x 78	643678LT		
36 x 80	643680LT		
36 X 80 Solid Core	643680SC		

* May require additional lead time as not all sizes are currently stocked




'Door Stops




71DS9006 2.5° Door Stop 71DSB282 Brass Srping Door

Wood Paneling and Trim

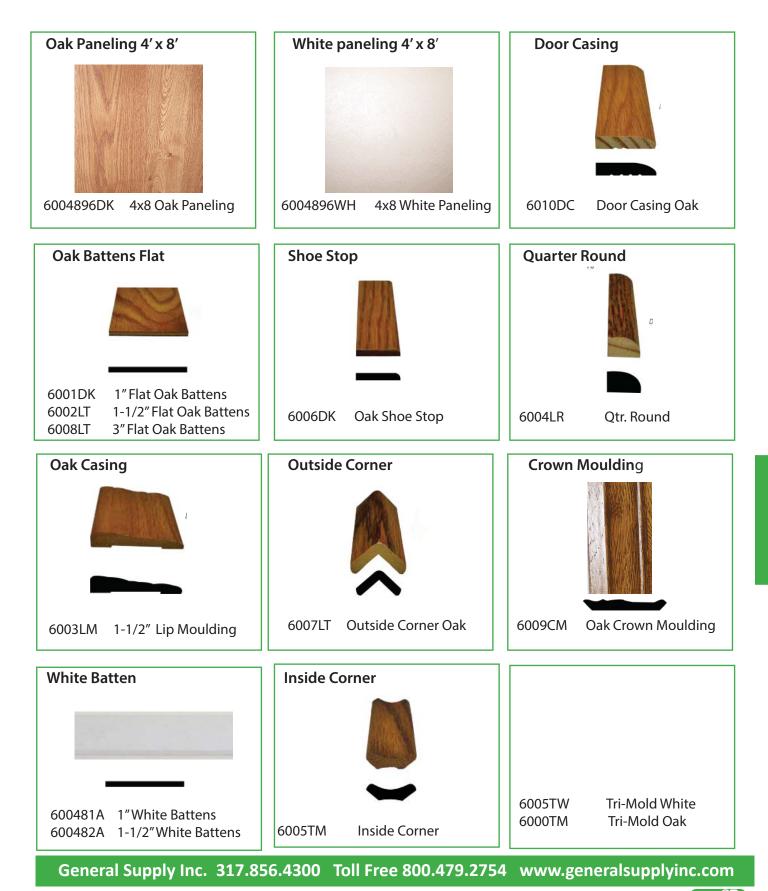

Phoenix Faucets for Kitchens and Bathrooms



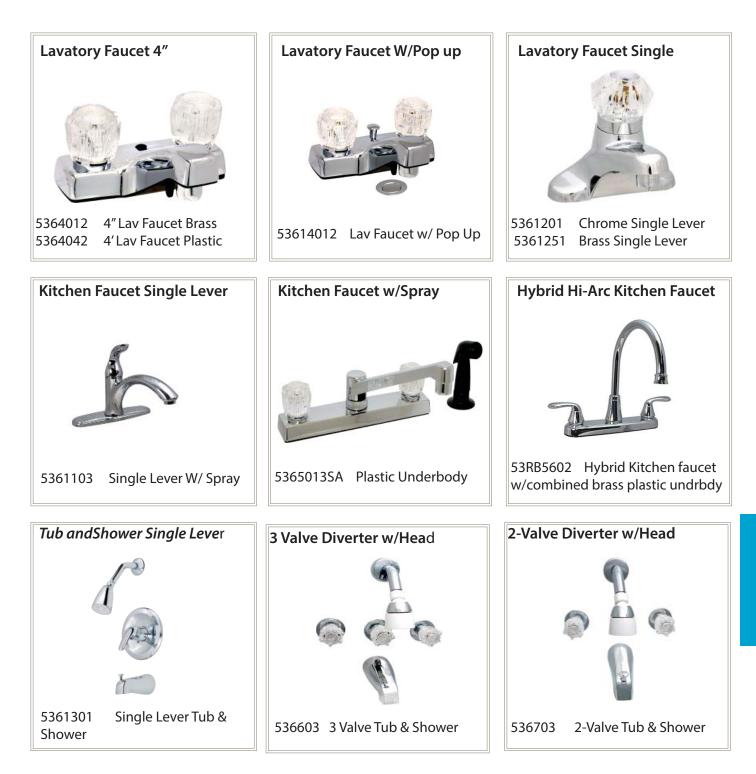




Phoenix Faucets for Kitchens and Bathrooms



Phoenix Faucets for Kitchens and Bathrooms



Long Spout Tub & Shower	Hi-Arc Faucet No Spray	Kitchen Faucet No Spray
5363812 3-3/8" Concealed. 5364812 4" Concealed Faucet	5365014A Hi-Arc No Spray	5365033A Plastic Underbdy Faucet
Bar Faucet	Shower Head & Hose	Crystal Handles
5365502 Bar Faucet	536956 Shower Hose & Head	Large Handles for Garden tub faucets 5340916C Cold Faucet Handle 53638916C Large Handle Cold 53638916H Large Handle Hot
Catalina Lavatory Faucet	Hybrid Lavatory Faucet	Single Leve Shower
53R4204 Catalina 2 Valve Low Arc	53RB4602 Hybrid 2-Valve Lav Faucet (Lead Free)	5364305 Single Lever Shower only

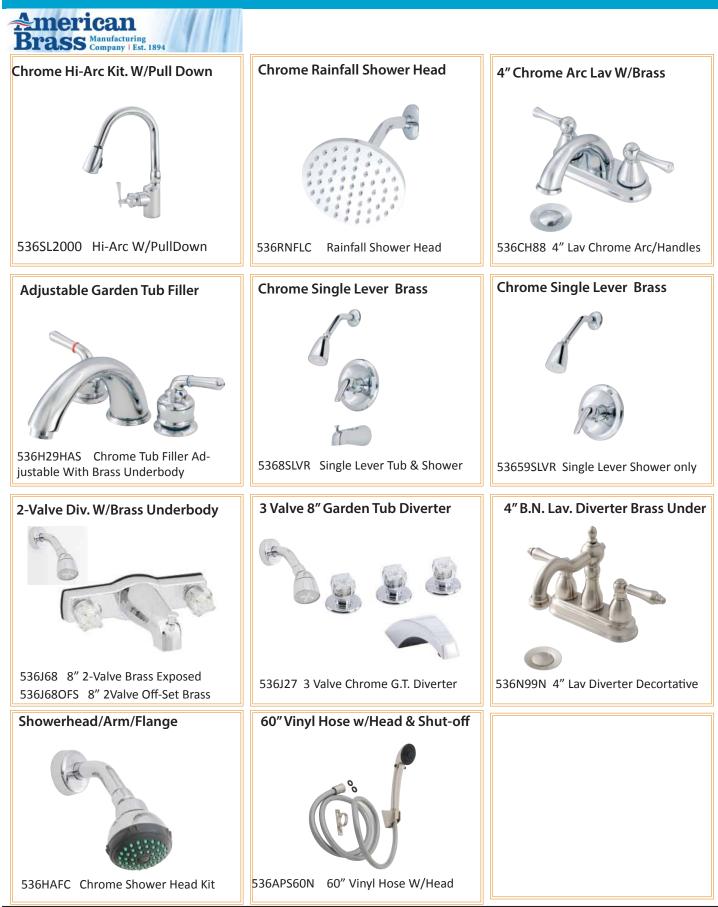

Phoenix Faucets Replacement Parts and Accessories



Shower Head, Arm Flange	C.O. Plug	Kitchen Faucet Head
		C.
5361346 Shower Head, Arm,Flange5364010 Shower Head Only536014 Shower Arm Only	53163715W White C.O. Plug 5316375B Bone C.O. Plug 532112 Chrome C.O. Plug	536012 Kitchen Faucet Spout
Phoenix Renewable Seat	Phoenix Stem & Bonnet	Garden Tub Spout
536601 60-1 Renewable Seat	5366050 41-5 Stem & Bonnet 5366150 61-5 Stem & Bonnet	5333970 Garden Faucet Spout
Sink Spray	Pop Up Assembly	Tub Rivets
ſ		
536010 Sink Sprayer	536029 Pop Up No Overflow 536030 Pop Up W/Overflow	53139Bone Tub Rivets53140White Tub Rivets


If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You

Kitchen and Bath Plumbing Accessories

Shower Drain	Twist and Turn Drain	Toe Touch Drain
5233R45 Shower Drain	522000M Twist & Turn Drain	52228 Toe Touch Drain
Shower Strainer	Trap Adapter	Kitchen Strainer
5233RP127 Shower Strainer	502216 Trap Adapter	522002 Kitchen Strainer
Tray Adapter	P-Trap w/Union	Continous Waste ABS
	S	502267 Continuous Waste W/Tail for Dishwasher
503419 Tray Adapter ABS	502215 P-Trap W/Union ABS	502260 Continuous Waste ABS

General Supply Inc. 317.856.4300 Toll Free 800.479.2754 www.generalsupplyinc.com

Kitchen and Bath Plumbing Accessories

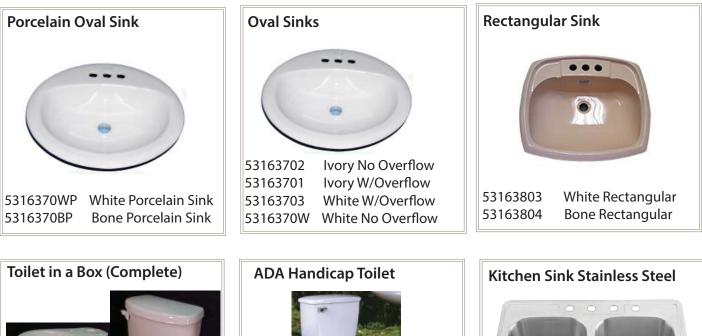



533165 White Toilet in a Box Incudes bow, I tank, seat, & ring




533165ADA Handicap Toilet Includes bowl, tank, seat, & ring




 533319
 33 x 19 x 6" Sink

 5333198
 33 x 19 x 8" Sink

 532019
 Faucet Hole Cover

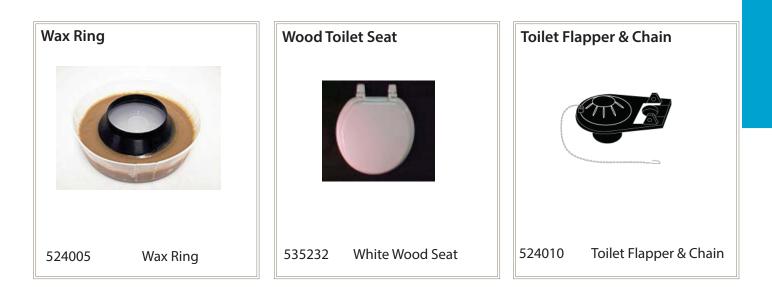

If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You

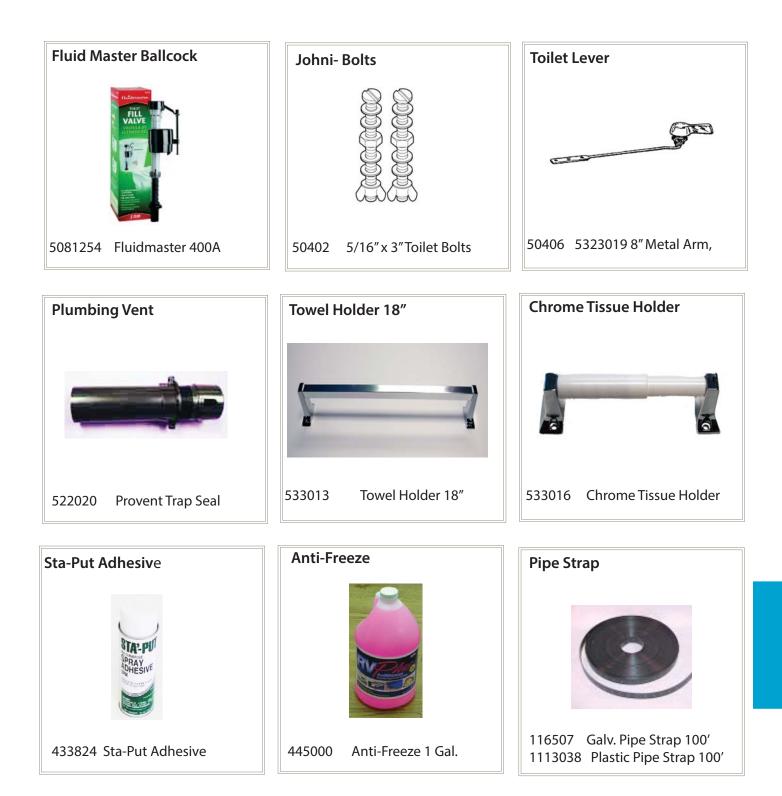

If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You



27 " x 54" x 12" ABS Bath Tubs. Individually Boxed Available in R/H, L/H or Center Drain. White or Almond Color



5327541L 5327541R 5327542L 5327542R 532754CDW 532754CDA 27 x 54 ABS Tub L/H Drain White 27 x 54 ABS Tub R/H Drain White 27 x 54 ABS Tub L/H Drain Almond 27 x 54 ABS Tub R/H Drain Almond 27 x 54 ABS Tub Center Drain White 27 x 54 ABS Tub Center Drain Almond

Heavy duty ABS Garden Tubs With Outside Step and Center Drain. Available in White or Almond. Boxed Each.



40 x 54 x 14" Garden Tub White ABS Outside Step 40 x54 x 14" Garden Tub Almond ABS Outside Step 46" x 60" x 14" Garden Tub White ABS Outside Step 46" x 60" x 14" Garden Tub Almond ABS Outside Step 40" x 60" x 14" Garden Tub White ABS Outside Step 40" x 60" x 14" Garden Tub Almond ABS Outside Step

Heavy duty ABS Stepless Garden Tubs Center Drain Available in White or Almond. Boxed Separately.



5330041S	40" x 54" x 14" White Stepless Garden Tub
5330042S	40" x 54" x 14' Almond Stepless Garden Tub
5334260W	42" x 60" x 14" White Stepless Garden Tub
5334260A	42" x 60" x 14" Almond Stepless Garden Tub


28" x 54" Shower Pans by Better Bath®




535428AL	28' x 54" Almond Shower Pan L/H
535428AR	28" x 54" Almond Shower Pan R/H
545428WL	28" x 54" White Shower Pan L/H
535428WR	28" x 54" White Shower Pan R/H

Better Bath

Better Bath COMPONENTS

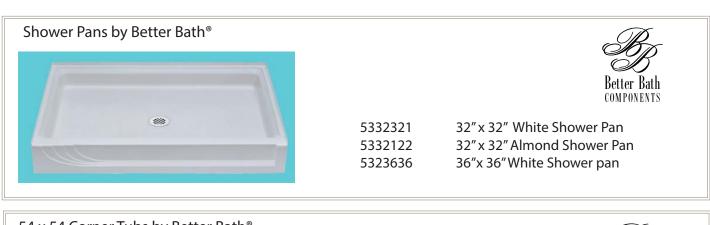





Drop In Oval Tubs by Better Bath®





535400A

545400CD


53254SPK

44" x 62" Oval Tub White 44" x 62" Oval Tub Almond 44" x 62" Oval Tub White Permalux

54" x 54" R/H White Corner Tub

Corner Tub Surround

54" x 54" Center Drain White Corner Tub

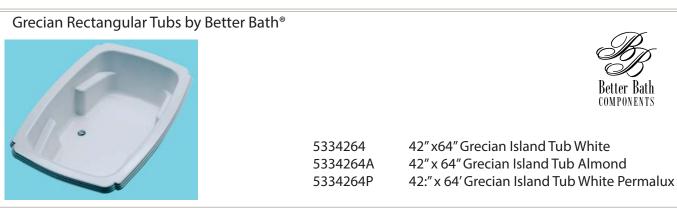


General Supply Inc. 317.856.4300 Toll Free 800.479.2754 www.generalsupplyinc.com

COMPONENTS



42" x 64" Ophelia Oval Tubs by Better Bath®

536400 534600A 534600P 42" x 64" Ophelia Island Tub White 42" x 64" Ophelia Island Tub Almond 42" x 64" Ophelia Island Tub White Permalux




One Piece Surrounds by Better Bath® 27 x 54



5330061 5330062 5330063 One Piece Surround White Tile One Piece Surround Almond Tile One Piece Surround White Tile (30 x 60)

3 Piece Surrounds for Bath Tubs	s and Shower Pans
Tub surrounds are 57-3/4"" Tall	Shower Surrounds 68" Tall

5330063P3-Piece Permalux Surround White Tile 27 x 545335428A3 Piece Surround Almond 28 x 54 Shower Pan5335428WP3 Piece Surround White Permalux 28 x54 Shower534054PW3 Peice Surround White Permalux 40 x 54 Tub534060PW3 Piece Surround White Permalux 40 x 60 Tub53023213 Piece Surround 32 x 32 Shower Pan White53023223 Piece Surround 32 x 32 Shower Pan Almond



3 Piece Surrounds Plus Corner Caddies for Garden Tubs ABS surrounds are for garden tubs are 57-3/4" Tall

5330091	3 Piece Surround White 40 x 54/60 ABS Tile
5330092	3 Piece Surround Almond 40 x 54/60 ABS Tile
5330101	White Corner Caddies (for 5330091)
5330102	Almond Corner Cadies (for 5330092)

Permalux Tubs and Surrounds



Permalux tubs add an acrylic layer over the heavy duty ABS finish. Permalux Plus tubs add an additional resin to the underbody of the tub to add strength and durability. Stronger, more durable, easier to clean, and backed with a 5 year warranty make these tubs an excellent purchase



27 x54 Permalux Plus Bath Tubs by Better Bath®

5327541LP 5327541RP 5327542LP 5327542RP 532754CDWP 532754CDAP 27" x 54" x 12"Tub L/H Drain White 27" x 54" x 12"Tub R/H Drain White 27" x 54" x 12" Tub L/H Drain Almond 27" x 54" x 12" Tub R/H Drain Almond 27" x 54" x 12" Tub Center Drain White 27" x 54" x 12" Tub Center Drain Almond



40 x 54 & 40 x 60 Permalux Garden Tubs by Better Bath®

5330041PS40" x 54" x 14" White Stepless Garden Tub Permalux5330041P40' x 54" x 14" White Outside Step Permalux Tub5330042P40" x 54" x 14" Almond Outside Step Permalux Tub5334060P40" x 60" x 14" White Outside Step Permalux Tub5334060A40" x 60" x 14" Almond Outside Step Permalux Tub5334260WP42" x 60" x 14" White Stepless Permalux Tub



54 x 54 Corner Tubs Permalux Finish by Better Bath®

535400P54" x 54" R/H Corner Tub White Permalux535400CDP54" x 54" Center Drain Corner Tub Permalux

535428WI 535428WI


28 x 54 Shower Pans Permalux Finish by Better Bath®

 535428WLP
 28" x 54" White L/H Permalux Pan

 535428WRP
 28" x 54" White R/H Permalux Pan

General Supply Inc. 317.856.4300 Toll Free 800.479.2754 www.generalsupplyinc.com

	27" x 54" Fiberglas	s Bath Tubs
	53111103W	27 X 54 White Center Drain Tub Fiberglass
	53111103A	27 x 54 Bone Center Drain Tub Fiberglass
	53111105A	27 x 54 Bone L/H Drain Tub Fiberglass
	5311101A	27 x 54 White L/H Drain Tub Fiberglass
	5311101W	5
		27 x 54 Bone R/H Drain Tub Fiberglass
	53111102W	27 x 54 White R/H Drain Tub Fiberglass
	2 Pc. Fiberglass Su	rround for 27 x54 Tubs
	53111104W	White 2 Pc. Surround 27x54 Tub or Shower
	53111104A	Bone 2 Pc. Surround 27 x54 Tub or Shower
	27 x 54 Fiberglass	Shower Pans and Surrounds
and the second s		
	53111105W	27 x 54 White Shower Pan Fiberglass
	53110005A	27 x 54 Bone Shower Pan Fiberglass
	C011110414/	2 De White Chevron Currenned Fiberglass
	53111104W	3 Pc. White Shower Surround Fiberglass
and the second	53110004A	2 Pc. Bone Shower Surround Fiberglass

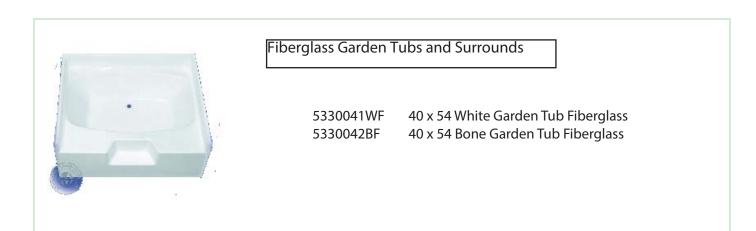



$30^{\prime\prime}\,x\,60^{\prime\prime}\,x\,12^{\prime\prime}$ Center Drain Tubs



533060CDA30 x 60 Almond Center Drain Tub533060CDW30 x 60 White Center Drain Tub533060CDWP30 x 60 White Permalux Center Drain



Tub Moulding Kits

534690W 534960A 534964A 534964W

White Tub Moulding Kit 54" Almond Tub Moulding Kit 60" Almond Tub Moulding Kit 54" White Tub Moulding Kit 54"

Bathroom Vanities

	Tub and Sho	ower Doors	
I	525128 525132 53378201 53378206	28" Shower Doors 32" Shower Doors 27 x 54 Tub Shower Doors 28 x 54 Shower Pan Doors	

If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You

PVC Fittings

PVC 45* WYE	PVC Threaded Plug	PVC Clean Out w/Plug		
505824 3" PVC 45* WYE	505938 3"Threaded Plug 505939 4"Threaded Plug	505924 3" Clean out only 505938 3" Plug only		
PVC Street Elbow 45*	PVC Sanitary Tee	PVC Coupler		
505892 3" Street Elbow 45*	505754 3″ Sanitary Tee	505934 2" PVC Coupler 505935 3" PVC Coupler 505936 4" PVC Coupler		
PVC Double Quarter Bend	PVC Double Sanitary Tee	PVC Elbow 45* Hub		
PVC Double Quarter Bend Image: Solid content of the second seco	PVC Double Sanitary TeeImage: Solution of the second state5058143" Dbl. Sanitary Tee	PVC Elbow 45* Hub Image: Sold of the system 505886 2" PVC Elbow 45* Hub 505887 3" PVC Elbow 45* Hub 505844 4" PVC Elbow 45* Hub		
		505886 2" PVC Elbow 45* Hub 3" PVC Elbow 45* Hub		
506005 3" Dbl. Qtr. Bend	505814 3" Dbl. Sanitary Tee	505886 2" PVC Elbow 45* Hub 505887 3" PVC Elbow 45* Hub 505844 4" PVC Elbow 45* Hub		

PVC Fittings

PVC Pipe Schedule 40	PVC Male Adapter	PVC Female Adapter
505800 1-1/2" x 10' PVC Pipe 505802 2" x 10' PVC Pipe 505801 3" x 10' PCV Pipe	505929 PVC 3" Male Adapter	505869 3" PVC Female Adapter
PVC Reducing Tee	PVC Reducer Bushings	PVC 22.5 Elbow
505837 3"x 3"x 1-1/2" Red. Tee 505857 3"x 3" x2" Red. Tee	505907 3" x 1-1/2" Red. Bushing 505908 3" x 2" Red. Bushing 505909 3" x 4" Red. Bushing	505901 3" PVC 22.5* Elbow
PVC 90* Vent Elbow	Neopreme Coupling	PVC Long Turn Tee-WYE
506006 3"Vent Elbow 90*	50543 3" x 3" Neopreme Coupling 50544 4"'' x 3" Neopreme Coupling	505853 1.5" PVC Long Turn T-WYE 505858 2" PVC Long Turn T-WYE 505852 3" PVC Long Turn T-WYE
Street Elbow	Dollar Plug	All Purpose Cement
		A minute com
505882 3" SPxH Street Elbow	5077653 3" Dollar Plug 5077654 4" Dollar Plug	507114All Purpose Glue 4 oz.507115All Purpose Glue Pint507120All Purpose Glue Qt.

If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You

Copper Sweat Fittings

5416525 3" x 25' Fiber-

glass Pipe Wrap

Copper Coupling	Copper Coupling	Female Adapter Copper			
2101009 3/8" Copper Coupling 2101017 1/2" Copper Coupling	2101022 5/8" Copper Coupling 2101028 3/4" Copper Coupling 2101034 7/8 "Copper Coupling	2101246 Fem. Adptr. 7/8" x 3/4"			
Copper Street Elbow	Copper Male Adapter	Copper Elbow Large Radius			
2102809 3/8" Street Elbow 90* 2102810 3/4" Street Elbow 90* 2102834 7/8" Street Elbow 90*	2101131 Male Adptr. 5/8" x 1/2" 2101146 Male Adptr. 7/8" x 3/4"	21102716 90* Lg. Radius 3/8" 21102717 90* Lg. Radius 1/2" 21102722 90* Lg. Radius 5/8" 21102728 90* Lg. Radius 3/4"			
Copper Elbow 45* Small	Copper Elbow 45* Large	Copper Coupling Reducer			
21103005 45* Elbow 1/4" 21103012 45* Elbow 3/8" 21103021 45* Elbow 1/2"	21103026 45* Elbow 5/8" 21103030 45* Elbow 3/4" 21103034 45* Elbow 7/8"	2101028 Coupling 5/8" x 3/8"			
Misce	Miscellaneous Plumbing Fittings				
Fiberglass Insulation Metal V	ent Cap Plastic Vent Ca	p Insulated Tubing			



522049 Vent Cap 1-1/2"

522084 Galv. Vent Cap

112

542705 3/8" x 7/8" K-Flex

542706 3/8" x 1-1/8" K-Flex

Pex Fittings

Pex Faucet Swivel Elbow	Pex Faucet Swivel	Ballcock Swivel	Female Pipe Adapter
			5094425 1/2" x 1/2"
504933 1/2″ Faucet Swvl. Elbow	503249 1/2″ Faucet Swvl.	506475 1/2" Ballcock Swivel	5094625 1/2" x 3/4" 5096625 3/4" x 3/4"
Brass Pex Elbow	Oetiker Pex Rings	Copper Pex Crimp Ring	Pex To Poly Coupling
		0	
50744251/2" x 1/2"50764253/4" x 1/.2"50766253/4" x 3/4"	505168P1/2" Ring505169P3/4" Ring505170P1" Ring	50254100 1/2" Ring 50256100 3/4" Ring	50184425 1/2" x 1/2" 50186625 3/4" x 3/4"
Pex Coupling Reducing	Boiler Drain Valve	Pex Coupling	1/2" Pex MPT Adapter
5016425 3/4" x 1/2"	5111702 1/2" Pex X 3/4" Hose (Wash Machine)	5014425 1/2″ x 1/2″ Coup. 5016625 3/4″ x 3/4″ Coup	50104425 1/2" x 1/2" MPT 50106425 3/4" x 1/2" MPT
3/4" Pex MPT Adapter	Pex Tee	Pex Ball Valve	Lever Ball Valve
50104625 1/2" x 3/4" MPT 50106625 3/4" x 3/4" MPT	50644425 1/2x1/2x1/2 Tee 50666625 3/4x3/4x3/4 Tee 50666412 3/4x1/2x3/4Tee 50666425 3/4x3/4x1/2 Tee	502067 1/2" Pex Ball Valve 50114791 3/4" Pex Ball Valve	500006 1/2" Lever Valve 500007 3/4" Lever Valve

General Supply Inc. 317.856.4300 Toll Free 800.479.2754 www.generalsupplyinc.com



ACETAL FITTINGS

Standard Pipe Thread Compression Fittings Use with Copper, CPVC. Galv. & Polybutylene

MPT to FPT Adapter	MPT Coupler	90* Elbow MPT
	501010 1/2"Coupler	501019 1/2" x 1/2" Elbow 501020 3/4" x 3/4" Elbow
501012 3/4 MPT x 1/2 FPT 501015 1"MPT x 3/4" FPT	501013 3/4" Coupler 501016 1" Coupler	501021 1" x 3/4" Elbow 501022 1" x 1" Elbow
Drop Ear Elbow	TEE MPT	Reducer
501018 3/4" MPT x 1/2" FPT 501017 1" MPT x 3/4" FPT	501024 1/2"x 1/2" x 1/2" 501026 3/4" x 3/4" x 3/4" 501029 1" x 1" x 1"	501014 1" x 3/4" Reducer
Pex Tubing 100' Rolls	Pex Tubing 20' Sticks	Angle Stop Valve MPT
50120200 1/2″ x 100' Roll 5034100 3/4″ x 100' Roll	5012020 1/2" x 20' Stick 5034020 3/4" x 20' Stick	501007 1/2" X 1/2" MPT 501008 1/2" X 3/4" MPT
	501012 3/4"MPT x 1/2" FPT 501012 3/4"MPT x 3/4" FPT 501015 1"MPT x 3/4" FPT Drop Ear Elbow 501018 501018 3/4" MPT x 1/2" FPT 501018 3/4" MPT x 1/2" FPT 501017 1" MPT x 3/4" FPT Pex Tubing 100' Rolls Colspan="2">Colspan="2" Colspan="2">Colspan="2" Colspan="2" Colspan="2" Colspan="2" Colspan="2" Colspan="2" Colspan="2" Colspan="2"	$ \begin{array}{c} \textbf{F}_{1} \\ \textbf{F}_{2} \\ F$

If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You

JG Speedfit®


JC Speedfit®

MAKING A GOOD CONNECTION



Like our Standard Fittings, JG Twist & Lock® Fittings have a collet with stainless steel teeth that grip the pipe when fully inserted, and an O-ring to provide a permanent leak-proof seal. The additional benefit of the JG Twist & Lock® fitting is that a twist of the screw-cap gives greater compression on the O-ring seal and locks the pipe in place for greater security.


PREPARE THE PIPE



To prevent damage to the O-ring remove all burrs and sharp edges. When using Speedfit Pipe, we recommend the use of Superseal Pipe Inserts. The Insert should only be used with Speedfit Pipe.

HOW TO MAKE A CONNECTION

Fittings and Pipe should be kept clean, bagged, and undamaged before use.



The fitting should be in the 'unlocked' position. This is shown by a small gap between the screw-cap and the body flange.

Speed Fit Stackable Mal

Valve



Push the pipe into the fitting and up to the pipe stop.



Twist the screw-cap until it touches the body flange. This locks the pipe into position and increases the O-ring seal around the pipe.

Pull to check that it is secure. It is good practice to test the system prior to leaving the site or before use. Our recommended test procedure is shown in our Technical Checklist.

TO DISCONNECT:

Ensure that the system is depressurized.



Be sure to twist the screw-cap back to the unlock position.

Push the collet square against the face of the fitting by using fingers. With the collet held in this position the pipe can be removed.



The fitting can be used again without the need for replacement parts. (Ensure the fitting is clean before every use).

WHAT NOT TO DO

- Do not use damaged or scored pipe
- Do not use a hacksaw to cut the pipe
- Do not leave burrs on the end of the pipe
- Do not forget to push the pipe fully into the fitting, past both the collet (gripper) and the O-ring.
- Do not insert fingers into the fitting as the stainless steel teeth may cause injury.

Remember to pressure test the completed installation according to the recommendations in our Technical Checklist.



Male Connector

538120241/2 x 1/2538120261/2 x 3/4538128263/4 x 3/4



538C2034 Female Swivel Connector 1/2"


If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You

JG Speedfit®

Coupler	Shut Off Valve	_ Female Ballcock Con.	Fem. Ballcock Elbow
5380420 1/2" Coupler 5380428 3/4" Coupler	538V20P 1/2" CTS Shut Off 538V28P 3/4" CTS Shut Off	538B20C75 1/2″ x 7/8″ Fem. Ballcock Connector	538C20C75 1/2" x 7/8" Fem. Ballcock Elbow Connector
Reducer	Reducing Coupler	Reducing Elbow	Reducing Tee
538062820 3/4 X 1/2" 538063628 1" x 3/4"	538202820 3/4 X 1/2" 538203628 1" x 3/4"	538212820 3/4" x 1/2" Reducing Elbow	5383028A 3/4 x 3/4 x 1/2 5383028B 3/4 x 1/2 x 1/2 5383028C 1/2 x 1/2 x 3/4
Stem Elbow	Union Tee	End Stop	90* Elbow
538222020 1/2" Stem Elbow 538222828 3/4' Stem Elbow	5380220 1/2" Union Tee 5380228 3/4" Union Tee	5384620P 1/2" End Stop 5384628P 3/4" End Stop	5380320 1/2" Elbow 90* 5380328 3/4" Elbow 90*
Slip Connector	Female Connector	Shark Bite Brass Elbow	Shark Bite Lever Valve
0000		5391320 Shark Bite 1/2"	5393120 1/2″Leverl Valve
53812SCP 1/2" Slip con- nector	538482836 3/4 x 3/4 Fe- male Connector	5391320 Shark Bite 1/2 5391321 Shark Bite 3/4"	5393120 1/2" Lever Valve

Plumbing Fittings FLARED - CONE & NUT FITTINGS Flair - It Fittings · Designed for normal hot & cold potable water · Reusable fittings - No corrosion or scaling Easy to Install . · Simple installation - No crimping tools, cements, solder or teflon tape needed Inexpensive To Use . . Complies with ASTMD 3309 & NSF listed (standard 14) . For Manufactured Housing & Rec. Vehicles Proven To Work And Last . Code Approved For Manufactured and Modular Homes STEP 1 STEP 2 STEP 3 Flairlt Slide the nut to the threads and Firmly press tubing onto the flare Slide nut over tubing. of the fitting until the tubing rests against the fittings threads. tighten securely onto the fitting. A division of ESCO **Female Elbow** Comp. Strt. Stop Valve Ballcock Swvl Adptr. Wash Machine Valve 5006802 1/2" x 1/2" FPT 5006892 1/2" x 3/8" Comp. 5006865 Swyl. Ballcock 5006887 Wash Machine 5006813 3/4" x 3/4" FPT Adapter 1/2" x 7/8" FSWV Straight Stop Valve Valve 1/2" Female Swivel Shut Off Valve Transition **Male Adapter** 5006873 1/2" x 1/2" FPT 5006842 1/2" x 1/2" M.Adpt 5006879 3/8" Shut off valve 5006856 1/2" x 3/4" FPT 5006844 Pex/Poly Transition 5006848 3/4" x 3/4" M. Adpt 5006880 1/2" Shut off valve 5006849 3/4" x 3/4" FPT **Ballcock Adapter** Flair-it Coupling **Flair It Elbow Swivel Elbow** 5006840 1/2" Flair it Coup. 5006800 1/2" Elbow 5006816 1/2 x 1/2" FPT 5006865 1/2"Ballcock 5006845 1/2 x 3/4 Coup. 5006806 3/4" Elbow 5006811 1/2"Fl x 3/4" FPT Adapter 5006846 3/4" Flair it Coup.. 5006805 1/2" to 3/4" FI-Pex 5006807 3/4" x 3/4" FPT Male Elbow Female Adapter Garden Hose Adptr. Garden Hose Adptr. 5006803 1/2" x 1/2" MPT 5006858 1/2" x 3/4" FPT 5006866 Garden Hose Adptr 5006866 Garden Hose Adptr 5006809 3/4" x 3/4" MPT 5006847 3/4" x 3/4" FPT 1/2"GHT x 1/2" MPT 1/2"GHT x 1/2" Fem 5006808 3/4" x1/2" MPT 5006841 1/2" x 1/2" FPT

If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You

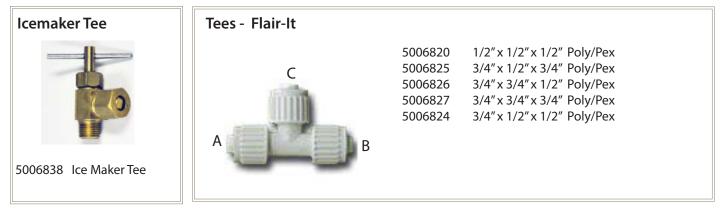

CPVC Fittings for HVAC

CPVC Coupling	MPT X Coupling	CPVC Elbow 45*
5054006 Coupling 3/4 x 3/4	5054007 3/4 MPT x 3/4 Coupling	5054117 45* Elbow Socket 3/4″
Elbow Spg. x Socket	CPVC Tee Socket	
5054907 3/4" 90* Street Elbow Spigot x Socket	5054017 3/4"Tee Socket	
	5054006 Coupling 3/4 x 3/4 Elbow Spg. x Socket 5054907 3/4" 90* Street Elbow Spigot x	Cr ve coupling Image: Cr ve coupling 5054006 Coupling 5054007 3/4 MPT 3/4 x 3/4 5054007 3/4 MPT Elbow Spg. x Socket CPVC Tee Socket Image: Socket Socket Socket Image: Socket Socket Socket Elbow Spigot x Socket

Black Malleable Iron Fittings

Item No.	Description	
541256	Brass Seat Union 1/2" x 1/2"	
541527	Brass Seat Union ¾" x ¾"	
545010	Black Iron Elbow ½" 90°	
545012	Black Iron Elbow ¾" 90°	
545035	Black Iron Street Elbow ½" 90°	
545036	Black Iron Street Elbow ¾ 90°	
545050	Black Iron Tee ½"	
545051	Black Iron Tee ¾"	
545054	Black Iron Reducing Tee ¾″ x ½′	
545070	Black Malleable Cap ½"	
545071	Black Malleable Cap ¾"	
545085	Black Iron Coupling 1/2"	
545086	Black Iron Coupling ¾"	
545095	Black Iron Reducing Coupling 3/4" x 1/2"	
545021	Black Iron Nipple 1/2" x 1-1/2"	
545202	Black Iron Nipple 1/2" x 2"	
545203	Black Iron Nipple 1/2" x 2-1/2"	
505204	Black Iron Nipple 1/2" x 3"	
545205	Black Iron Nipple 1/2" x 3-1/2"	
545206	Black Iron Nipple 1/2" x 4"	
545207	Black Iron Nipple 1/2" x 4-1/2"	
545208	Black Iron Nipple ½" x 5"	
545209	Black Iron Nipple $\frac{1}{2}$ " x 5-1/2"	
545210	Black Iron Nipple ¹ / ₂ " x 6"	
545227	Black Iron Nipple ¾" x 1-1/2"	
545228	Black Iron Nipple ¾" x 2"	
545229	Black Iron Nipple ³ / ₄ " x 2-1/2"	
545230	Black Iron Nipple 3/4" x 3"	
545231	Black Iron Nipple 3/4 " x 3-1/2"	
545232	Black Iron Nipple ¾" x 4"	
545233	Black Iron Nipple ¾" x 4-1/2"	
545234	Black Iron Nipple 3/4" x 5"	
545235	Black Iron Nipple ¾" x 5-1/2"	
545236	Black Iron Nipple ¾" x 6"	
545303	Black Iron Pipe ½" x 36"	
545304	Black Iron Pipe ½" x 48"	
545305	Black Iron Pipe ½" x 60"	
545308	Black Iron Pipe ¾" x 24"	
545310	Black Iron Pipe ¾" x 36"	
545311	Black Iron Pipe ¾" x 48"	
545312	Black Iron Pipe ¾" x 60"	
545314	Black Iron Pipe ¾" x 120"	









If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You

Pro-Bite Fittings



If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You



General Supply Inc. 317.856.4300 Toll Free 800.479.2754 www.generalsupplyinc.com

Direct Vent Gas Water Heaters for Manufactured Housing

- No external vent door is required
- All combustion air comes from outside the home
- Provides maximum design freedom as it can be placed anywhere within the home
- Hot water located at the top
- Factory Installed temperature and pressure relief valve (side location)
- Exclusive Rheemglas[®] tank lining resists corrosion and prolongs tank life
- Field convertible controls for natural gas or L.P. operation
- Meets or exceeds National Appliance Energy Conservation Act (NAECA) requirements
- Peizo ignitor easy light pilot

Back Flow Preventer

57234" Brass Back Flow

Preventer 3/4" MPT x FPT

- Certified for (HUD) Manufactured & Modular contruction
- Anote rod equalizes aggressive water action
- cold water inlet side connection allows for fast, economical hook up.

Corregated Supply Line

569103 Corregated Water

Supply Line 3/4'

Reen Water Heaters Well Known Value.[™]

1 Year Limited Tank & Parts Warranty.

The Warrior Dircect Vent Water Heater is C.S.A Certified for Manufactured Home use. Meets ANSI standards for Modular Home construction, and complies with HUD safety and construction standards

3/4" Galvenize Nipple



6037502 3/4" x 2" Galv. Nipple


Stainless Flex Water Heater Connector



60615 Stainle Water Htr Connceter 3/4" Braided

Part No.	Description	Gallon	Height	Diameter	Weight
5699930	Rheem Water Heater Gas Direct Vent	30	57"	17-3/4"	110
5699940	Rheem Water Heater Gas Direct Vent	40	57-1/2"	19-3/4"	125
56AP12118B	Roof Jack 15" – 32" Adjustable				
56AP12118C	Roof Jack 30" – 60" Adjustable				
56AP12118D	Roof Jack 48" – 95" Adjustable				
56AP12021	Roof Jack Extension Pipe Kit 18"				
56AP12191	Inlet Vent Kit For Basement Crawl Space				
56AP12017B	Air Inlet 11" – 22' Adjustable				

Gas Water Heaters

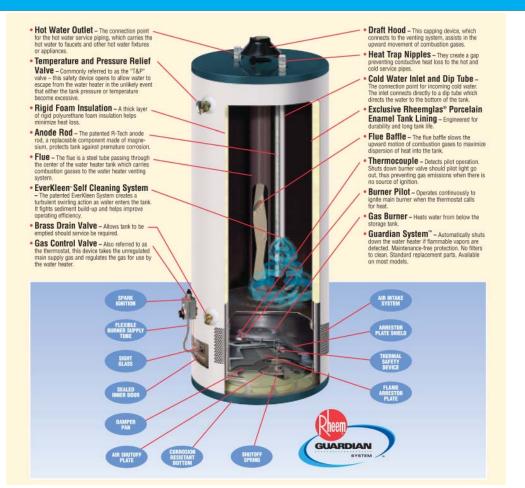



These units are designed to meet or exceed ANSI (American National Standards Institute) requirements and have been tested according to D.O.E. test procedures and meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria for energy consuming appliances.

Before purchasing this appliance, read important energy cost and efficiency information available from your supplier.

Adjustable Roof Jack Vent

Design allows adjustment to roof pitches of up to 5/12". Four roof jacks available to accommodate roof thickness of 12" up to 95".

Direct Combustion Air Inlet

Air is drawn directly into combustion chamber through air inlet fixed to base; 1/2" screen for rodent protection.


ROOF JACKS		
12" Non Adjustable	AP12119B	
15-32" Adjustable	AP12118B	
30-60" Adjustable	AP12118C	
48-95" Adjustable	AP12118D	
AIR INLETS		
6" Non Adjustable	AP12019B	
11-22" Adustable	AP12017B	
EXTENSION PIPE KIT		

 Roof Jack Extension Pipe Kit
 AP12021

 • Roof jack and air inlet must be ordered separately with 30, 40 and 50 gallon direct vent models and must be in accordance with instructions furnished with the heater. No other roof jack or air inlet assemblies are approved

for installation with this heater. Clamps and secure strapping are packed in water heater carton.

THE WARRIOR DV IS U.L. CERTIFIED FOR MANUFACTURED HOME USE, MEETS ANSI STANDARDS FOR MODULAR HOME CONSTRUCTION, AND COMPLIES WITH HUD SAFETY AND CONSTRUCTION STANDARDS.

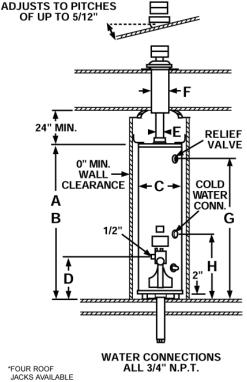

JACKS AVAILABLE TO ACCOMMODATE ROOF THICKNESS OF 12" UP TO 95"

6-Year Limited Tank & Parts Warranty

Top Feed Electric Water Heaters Not HUD Approved for MFD. Homes



These Electric water heaters are designed for residential use and are not HUD approved for Mfd. Homes. They are a top feed with two 4500 watt copper heater elements

- Double 4500 Watt Copper Element for fast recoup
- Fused Ceramic Shield Tank for Anti-corrosion Protection
- **T&P Valve** Conveniently located on the side of the tank to facilitate piping to a drain or external to the building
- Non-CFC Polyurethane Foam to Help Rduce Heat Loss and Energy Loss
- Drain Valve Child resistant, corrosion-resistant drain valve
- 6 Year Tank Warranty
- 3/4" Water Connection Size
- 40 Galllon Dimensions 47.25 " x 20." Dia.
- 30 Gallon Dimensions 45.25" x 22" Dia.





	Water Heater Doors
Part No.	Descripiton
722060	20 x 60 Solid Water Heater Door White
722060WV	20 x 60 Vented Water Heater Door White
722360	23 x 60 Solid Water Heater Door White
 722360V	23 x 60 Vented Water Heater Door White

Part No.	Description	Gallon	Elements	Size	Water Connetion
569030T	Electric Top Feed	30	Double 3500 / 240	45.25" x 22" Dia.	Top Feed ¾"
569040T	Electric Top Feed	40	Double 4500 / 240	47.25" x 20" Dia.	Top Feed ¾"

If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You

Electric Water Heater

Electric Water Heaters Approved for Manufactured Homes



All residential electric water heaters have the Fused Ceramic Shield lining, a tough, thick durable coating of ceramic that is fused to the tank's interior surface at 1600*F, forming a corrosion-resistant lining for years of dependable protection and use.

Available In Dual or Single Heaing Elements Screw-in direct immersion, 4500 watt, 240 volt heating elements for maximum efficiency

- Non-CFC Foam Insulation The tank is surrounded by a thick coat of non-CFC polyurethane foam to trap heat inside the tank saving energy
- **T&P Valve** Conveniently located on the side of the tank to facilitate piping to drain or external to the building
- 3/4" Water Connections side-located
- **Anode Rod** top-mounted, heavy duty anode for added tank protection, extending the life fo the tank.
- Built in Electric Junction Box top-located, convenient junction box, ready for 1/2" or 3/4" conduit
- Thermostat/High Limit Control Combination control allows adjustment of water temperature while providing overheat protection.
- *Code Approvals* Listed to UL 174, Hud approved for mobile home installation, BOCA and ASHRAE90.1-1999 All models are certified at 300 PSI test pressure and 150 PSI working pressure
- **Drain Valve** Child resistant, corrosion resistant drain valve.


6-Year Limited Tank & Parts Warranty

Single Element

Double Element




Water Heater T-Stat



577723 Single Pole Lower Stat 577843 Single Pole Combo Stat 577863 Double Pole Upper Stat


Part No.	Gallon	Element	Width	Height	Weight
569030	30	Double	18"	47-1/4""	84
569031	30	Single	18"	45-1/4""	84
569040	40	Double	20″	47-1/4"	92
569041	40	Single	20"	47-1/4"	92

Open Coil Water Htr. Element



575802 240V 2000W Open Coil

Screw In Water Htr. Element




572343 240V 4500W Screw In Elmt

Water Htr. Element Wrench



579932 Water Htr. Element Wrench

General Supply Inc. 317.856.4300 Toll Free 800.479.2754 www.generalsupplyinc.com

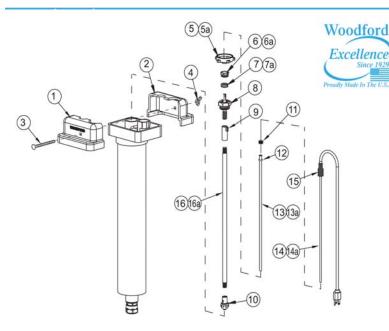

Item #	Part No.	Description
1	580055	Cover Themaline
2	580056	Cover Woodford
3	580073	Carriage Bolt
4	580068	Wing Nut
5*	580013	Handle (Brass) (Older units lead Handle)
5A	580018	Brass Handle (lead Free)
6*	580005	Packing Nut (Older units before 6/1/2011
6A	580017	Packing Nut (Lead Free)
7*	580008	Packing
7A	580010	Packing Nut (lead Free Units
8	585064	Head Nut Assy (Lead Free)
9	580066	Yoke Nut
10	585015	Combination Valve Assy
11	580062	Heater Well Thumb Nut
12	580063	Heater Well Washer
13	585002	2' Heater Well Assy (Includes Item 12)
*13a	585001	1' Heater Well Assy (Includes Item 12)
14	585062	2' Heater Assy (Includes Item 15)
*14a	585061	1' Heater Assy (Includes Item 15)
15	580061	Heat Cover

* Parts 5,6,7 Can not be used with 585064 Head Nut Assembly

** Old Style Heaters originally used in Thermaline units with cast iron

Covers are replaced with items 11,13,14

WOODFORD

Freezeless Sanitary Water Connector Thermaline®

Part No.	Bury	Brass Valve	Heater
	Depth	Inlet	Watt
580020	2 Feet	¾″ N.P.T	15
580030	3 Feet	¾″ N.P.T	15
580040	4 Feet	¾″ N.P.T	15
580050	5 Feet	¾″ N.P.T	15
580060	6 Feet	¾″ N.P.T	15

The Thermaline is a compact unit designed especially to provide water service to Mfd. Homes. It is ideal wherever a freezeless sanitary tight line installation is needed.

- The Thermaline is protected from freezing by a bonded polyurethane foam insulation permanently molded in high strength plastic casing, a 15 watt (110-120v) portable insert heater, which cost about a penny a day to operate even at 50* below zero.
- The heater can be inserted and removed from the Thermaline without interupting the water service
- Galvanized iron riser pipe with coal-tar coating on lower end, brass fittings, structural foam protective surface cover, and extra large cushion valve all combine to make the Thermaline water connector virtually maintenance free.
- When not in use, wheel handle at surface level shuts off water below frost line and above the frost line can be removed completely with forced air or suction pump

Freeze Protection Plumbing



Freeze Free[®] Cable – Self-regulating pipe heating cable that automatically varies its heat output with changes in surrounding temperature. Freeze Free cable helps keep plastic and metal water pipes from freezing to -60°F/-51°C. A braided metal jacket provides an electrical ground as well as protection against damage in dry locations. Freeze Free cable is available on reels of 100 feet, 300 feet and 500 feet and can be cut to desired lengths per application.

CABLE APPLICATION

Freeze Free cable can be applied on water-filled metal or rigid plastic pipes up to 2" (50.80mm) in diameter. On smaller size pipes, the cable can usually be applied straight along the pipe. However, on longer pipes and especially at lower temperatures, the cable must be spiraled around

the pipe. This ensures adequate heat is applied to the pipes to keep them from freezing. The charts below indicate the application requirements for plastic and metal pipes.

	Lowest Expected Temperature Table											
	Plastic Pipe						Meta	l Pipe				
Diameter	½"	¾"	1"	1¼"	1½"	2"	½"	¾"	1"	1¼"	1½"	2"
	(12.70mm)	(19.05mm)	(25.40mm)	(31.75mm)	(38.10mm)	(50.80mm)	(12.70mm)	(19.05mm)	(25.40mm)	(31.75mm)	(38.10mm)	(50.80mm)
	Heating Cable Required Per Foot of Pipe											
+20°F	1'	1'	1'	1'	1'	1'	1'	1'	1'	1'	1'	1'
(–7°C)	(30.48cm)	(30.48cm)	(30.48cm)	(30.48cm)	(30.48cm)	(30.48cm)	(30.48cm)	(30.48cm)	(30.48cm)	(30.48cm)	(30.48cm)	(30.48cm)
0°F	1'	1.1'	1.3'	1.6'	1.8'	2.1'	1'	1'	1'	1.1'	1.2'	1.5'
(–18°C)	(30.48cm)	(33.53cm)	(39.62cm)	(48.76cm)	(54.86cm)	(64.01cm)	(30.48cm)	(30.48cm)	(30.48cm)	(33.53cm)	(36.57cm)	(45.72cm)
–20°F	1.5'	1.7'	2'	2.3'	2.5'	3'	1'	1.1'	1.3'	1.6'	1.8'	2.2'
(–29°C)	(45.72cm)	(51.82cm)	(60.96cm)	(70.10cm)	(76.20cm)	(91.44cm)	(30.48cm)	(33.53cm)	(39.62cm)	(48.76cm)	(54.86cm)	(67.05cm)
–40°F	2'	2.3'	2.7	3.2"	3.6'	4.3'	1.3'	1.5'	1.8'	2.1'	2.4'	2.8'
(–40°C)	(60.96cm)	(70.10cm)	(82.29cm)	(97.53cm)	(109.72cm)	(131.06cm)	(39.62cm)	(45.72cm)	(54.86cm)	(64.01cm)	(73.15cm)	(85.34cm)
–60°F	2.4'	2.9'	3.3'	4.1'	4.7'	5.4'	1.7'	2'	2.4'	2.9'	3.2'	3.9'
(–51°C)	(73.15cm)	(88.39cm)	(100.58cm)	(124.96cm)	(143.25cm)	(164.59cm)	(51.82cm)	(60.96cm)	(73.15cm)	(88.39cm)	(97.53cm)	(118.87cm)

Shaded selections can run straight on pipe Unshaded selections must be spiraled evenly along the pipe





Part No.	Description		
15100	100' Roll Easy Heat		
15300	300' Roll Easy Heat		
15500	500' Roll Easy Heat		
15101	Easy Heat Plug W/Whip		
151111	Gel Cap		
15102	Easy Heat (Sold by the ft.)		

If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You



Putty Tape 1	Black Cloth Duct Tape	Electrical Tape	Teflon Tape
43120334 Putty Tape 1/8″ x 3/4″ x 30′	602609 Black Cloth Tape 2″ x 60′	602420 Black Elect. Tape	602601 Teflon Tape
Close Off Tape	Butyl Tape	Foil Tape Aluminum	Roof Coat Brush
608111 Close off Tape 4" x 180'	43180334 Butyl Tape 1/8″ x 3/4″ x30′	602610 Foil Duct Tape 2″ x 50 Yds.	42972Roof Coat Brush42989Brush Handle



45 mils

60 lbf/in

150% min.

Pass -25 F

55° - 110° F

33.5' 3", 4" 6", 9", 12", 18", 36"

100 sq. ft.

Thickness

Elongation Pliability

Roll Length

Roll Widths Area per carton

Tensile Strength

Application Range

Peel & Seal[™] is the original, self-stick roll roofing specifically designed for low slope residential and commercial applications. Composed of a patented formula (consisting of laminated aluminized foil, high-density polymer films and a thick layer of rubberized asphalt), Peel & Seal provides a long lasting, durable, maintenance-free roofing surface.

The self-adhering, weatherproof, reflective surface not only forms a highly effective barrier to the elements, but also limits solar heating to help keep the temperature of building interiors significantly

Weight per carton	33 lbs			
Cartons per pallet	30	43336W	6" X 33.5' Roll White Peel & Seal	6/ct.
		43312W	12" x 33.5' Roll White Peel & Seal	3/ctn.
		43318W	18" x 33.5' Roll White Peel & Seal	2/ctn.
		433336W	36" x 33.5' Roll White Peel & Seal	1/ctn.

If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You

Sun-Tek

The Skylight Experts

- Sun-Tek Dura Series Skylights are distinguished • by their easy installation and their long-wearing durability
- Dura series are made with G.E Lexan[®] Resin
- Dura Skylights are 30 times more impact resistant than acrylic skylights, 250 times more impact resistant than glass
- *The Polycarbonate in Dura Skylights* is the same product used to produce airplane windows, auto bumpers and football helmets.
- Dura Skylights are UV stabilized for long lasting protection
- Polycarbonate Skylights resist temperature extremes from a frigid -60° below zero to an oven baking +250°.
- Available in a bronze exterior with a clear or frosted interior finish, with your choice of single double[,] or triple domes[.] Each layer of air between domes enhances thermal protection.

1414 1422 2230 2246 1430 1446 2222 3030 3046 4646 S463008 S463009 S463010 S463011 S463012 **0S463013** S463014 S463018 S463016 S463017 Number Daylight 2.0 3.2 4.4 1.3 2.8 4.3 6.8 6.0 9.3 14.4 Approx Sq. Ft. Roof 14.5 14.5 14.5 14.5 22.5 22.5 22.5 30.5 30.5 46.5

Х

22.5

SF Series Polycarbonate Skylights

SIZE

CODE

Part

Area

Opening

WxH

SFAW Dura Series Skylights Are Available by Special Order. See Why These are Sun-Tek's Most **Popular Series**

Х

22.5

Х

30.5

Х

14.5



Two-piece insulated dome for better weather protection. (Triple dome units available on selected sizes).

Х

30.5

Х

46.5

Х

30.5

These ridges are really important, they're patented WATER DIVER-SION CHANNELS - they guide water off the skylight to prevent leaks. You only get them on a Sun-Tek Skylight.



Х

46.5

046STS1000 Skylight Roof Sealant

Take a look at the corners, they're heliarc-welded, so the joints are permanently fused - NO CHANCE OF A LEAK HERE !

Х

46.5

Х

46.5

This base is one solid piece of aluminum - it can't possibly leak

FLEX-MEND



Finally - a neat, fast permanent and inexpensive way to mend holes, cuts, and tears in most mobile home bottom closure materials is at hand.

Flex-Mend is a time tested mending product that matches the appearance and texture of bottom board closure materials used by most manufacturers in the mobile home industry today. Flex-Mend is a woven polyethylene film currently meeting all requirements for use as bottom board by the mobile home industry. It has been solid-coated with specially formulated, high tech adhesive, and has an easily removed release liner. It goes on like a band-aid



Mobile Flex is a special bottom closure, woven from black high density polyethylene and extrusion coated with a continuous layer of low density polyethylene. The material is uniform in quality with no weak spots. Its beach puncture resistance is more than five times the minimum established by HUD! Staple hold out is excellent. Penetrations and cuts will not spread and can be easily patched using our Flex-Mend tape.

MOISTURE- Mobile flex is totally impervious to water. Its strength can not be adversely affected by moisture. Because of its black polyethylene coating, Mobile Flex qualifies as a vapor barrier. Technical report #19757 from Chicago Paper Testing Laboratory, Inc., reports the material to have an average perm rating of 0.037.

DURABILITY- Mobile Flex is produced from a material that has been tested for durability and weatherability. After seven years of continuous, direct exposure to the elements in Arizona, the material retained 70% of its strength. The tapes and coatings are both chemically tested to ensure maximum performance.

FLAMMABILITY- Mobile Flex is classified by Underwriters Laboritatories, Inc., as to surface burning characteristics. Mobile Flex tested out to zero flame spread and zero smoke developed. The tests were conducted in accordance with UL Standard Test Method for Surface Burning Characteristics of Building Materials,


Part No.	Description	Adhesive/Non Adhesive
60101	Flex Mend 30" x 100' Roll	Non Adhesive
6011680	Flex Mend 16'4" x 80' Pre-Cut	Non Adhesive
601470	Flex Mend 14'4" x 70' Pre-Cut	Non Adhesive
601860	Flex Bottom Board 48" x 600'	Non Adhesive
6012825	Flex Mend Patch 28" x 25'	Adhesive Backing
601618	6" x 180' Flex Mend Tape	Adhesive Backing
601480	4" x 180' Flex Mend Tape	Adhesive Backing

Insulation and Repair



If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You

Hardware & Screws

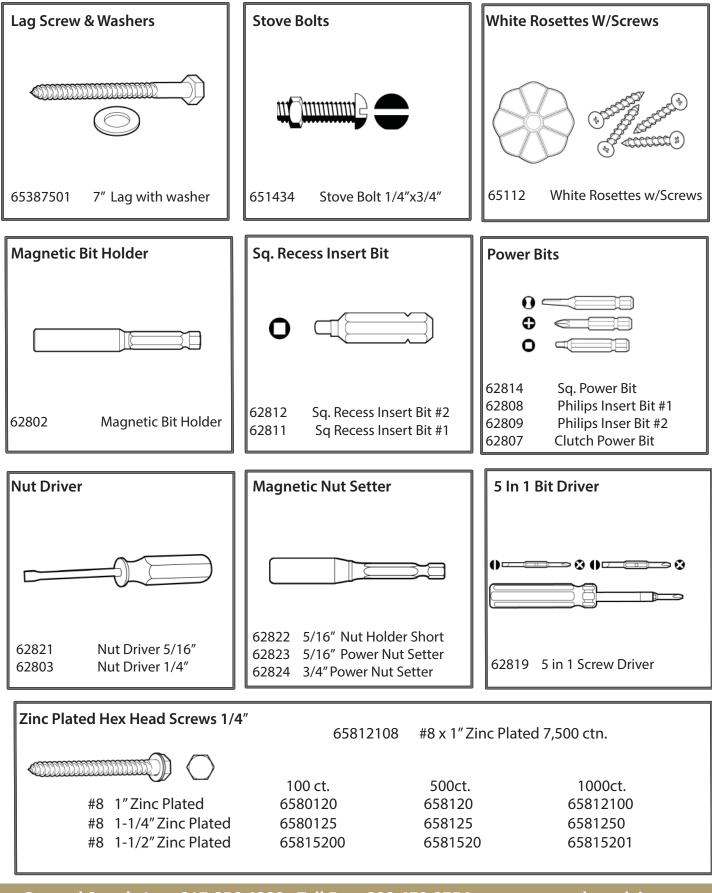



If You Don't See What You Are Looking For, Call Us Today And We Will Find It For You